

Reference Guide
Mandrake Linux 9.1



<http://www.MandrakeSoft.com>

Reference Guide: Mandrake Linux 9.1

Published 2003-03-24

Copyright © 2003 MandrakeSoft SA

by Camille Bégnis, Christian Roy, Fabian Mandelbaum, Joël Pomerleau, Vincent Danen, Roberto Rosselli del Turco, Stefan Siegel, Marco De Vitis, Alice Lafox, Kevin Lecouvey, Christian Georges, John Rye, Robert Kulagowski, Pascal Rigaux, Frédéric Crozat, Laurent Montel, Damien Chaumette, Till Kamppeter, Guillaume Cottenceau, Jonathan Gotti, Christian Belisle, Sylvestre Taburet, Thierry Vignaud, Juan Quintela, Pascal Lo Re, Kadjo N'Doua, Mark Walker, Roberto Patriarca, Patricia Pichardo Bégnis, Alexis Gilliot, Arnaud Desmons, Wolfgang Bornath, Alessandro Baretta, Aurélien Lemaire, Daouda Lo, Florent Villard, Gwenole Beauchesne, Giuseppe Ghibò, Joël Wardenski, and Debora Rejnharc Mandelbaum

Legal Notice

This manual is protected under **MandrakeSoft** intellectual property rights. Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.1 or any later version published by the Free Software Foundation; with the invariant sections being *About Mandrake Linux*, page i, with the front-cover texts being listed below, and with no back-cover texts. A copy of the license is available on the GNU site (<http://www.gnu.org/licenses/fdl.html>).

Front-cover texts:

MandrakeSoft March 2003

<http://www.mandrakesoft.com/>

Copyright © 1999, 2000, 2001, 2002, 2003 by MandrakeSoft S.A.
and MandrakeSoft Inc.

“Mandrake”, “Mandrake Linux” and “MandrakeSoft” are registered trademarks of **MandrakeSoft S.A.**; Linux is a registered trademark of Linus Torvalds; *UNIX* is a registered trademark of The Open Group in the United States and other countries. All other trademarks and copyrights are the property of their respective owners.

Tools Used in The Making of This Manual

This manual was written in XML *DocBook*. Borges (<http://linux-mandrake.com/en/doc/project/Borges/>) was used to manage the set of files involved. The XML source files were processed by *openjade* and *jadetex* using Norman Walsh’s custom stylesheets. Screen-shots were taken using *xwd* or *GIMP* and converted with *convert* (from the *ImageMagick* package). All this software is available on your **Mandrake Linux** distribution, and all parts of it are free software.

Table of Contents

Preface	i
1. About Mandrake Linux	i
1.1. Contact Mandrake Community	i
1.2. Support Mandrake Linux	i
1.3. Contribute to Mandrake Linux	i
1.4. Purchasing Mandrake Products	ii
2. Note from the Editor	ii
3. Conventions Used in this Book	ii
3.1. Typing Conventions	ii
3.2. General Conventions	iii
I. The Linux System	1
1. Basic UNIX System Concepts	1
1.1. Users and Groups	1
1.2. File Basics	2
1.3. Processes	4
1.4. Small Introduction to the Command Line	4
2. Disks and Partitions	9
2.1. Structure of a Hard Disk	9
2.2. Conventions for Naming Disks and Partitions	11
3. Introduction to the Command Line	13
3.1. File-Handling Utilities	13
3.2. Handling File Attributes	15
3.3. Shell Globbing Patterns	17
3.4. Redirections and Pipes	17
3.5. Command-Line Completion	19
3.6. Starting and Handling Background Processes: Job Control	20
3.7. A Final Word	20
4. Text Editing: Emacs and VI	21
4.1. Emacs	21
4.2. <i>Vi</i> : the ancestor	23
4.3. A last word... ..	27
5. Command-Line Utilities	29
5.1. File Operations and Filtering	29
5.2. find: Find Files According to Certain Criteria	33
5.3. Commands Startup Sheduling	35
5.4. Archiving and Data Compression	36
5.5. Many, many more... ..	38
6. Process Control	39
6.1. More About Processes	39
6.2. Information on Processes: ps and pstree	39
6.3. Sending Signals to Processes: kill, killall and top	40
6.4. Setting Priority to Processes: nice, renice	41
II. Linux in Depth	43
7. File Tree Organization	43
7.1. Shareable/Unshareable, Static/Variable Data	43
7.2. The root Directory: /	43
7.3. /usr: The Big One	44
7.4. /var: Modifiable Data During Use	44
7.5. /etc: Configuration Files	44
8. Filesystems and Mount Points	47
8.1. Principles	47
8.2. Partitioning a Hard Disk, Formatting a Partition	48
8.3. The mount and umount Commands	48
8.4. The /etc/fstab File	49
8.5. A Note About The Supermount Feature	50
9. The Linux Filesystem	51
9.1. Comparison of a Few Filesystems	51
9.2. Everything is a File	52

9.3. Links	54
9.4. "Anonymous" Pipes and Named Pipes.	54
9.5. "Special" Files: Character Mode and Block Mode Files.	56
9.6. Symbolic Links, Limitation of "Hard" Links	56
9.7. File Attributes	57
10. The /proc Filesystem	59
10.1. Information About Processes	59
10.2. Information on The Hardware	60
10.3. The /proc/sys Sub-Directory	62
11. The Start-Up Files: init sysv	63
11.1. In the Beginning Was init	63
11.2. Runlevels	63
III. Advanced Uses	65
12. Building and Installing Free Software	65
12.1. Introduction	65
12.2. Decompression	66
12.3. Configuration	68
12.4. Compilation	71
12.5. Installation	76
12.6. Support	77
12.7. Acknowledgments	78
13. Compiling And Installing New Kernels	79
13.1. Where to Find Kernel Sources	79
13.2. Unpacking Sources, Patching The Kernel (if Necessary)	79
13.3. Configuring The Kernel	80
13.4. Saving, Reusing Your Kernel Configuration Files	81
13.5. Compiling Kernel And Modules, Installing The Beast	82
13.6. Installing The New Kernel Manually	83
A. The GNU General Public License	87
A.1. Preamble	87
A.2. Terms and conditions for copying, distribution and modification	87
B. GNU Free Documentation License	91
B.1. GNU Free Documentation License	91
0. PREAMBLE	91
1. APPLICABILITY AND DEFINITIONS	91
2. VERBATIM COPYING	92
3. COPYING IN QUANTITY	92
4. MODIFICATIONS	92
5. COMBINING DOCUMENTS	93
6. COLLECTIONS OF DOCUMENTS	94
7. AGGREGATION WITH INDEPENDENT WORKS	94
8. TRANSLATION	94
9. TERMINATION	94
10. FUTURE REVISIONS OF THIS LICENSE	94
B.2. How to use this License for your documents	95
C. Glossary	97
.....	

List of Tables

9-1. Filesystem Characteristics	52
---------------------------------------	----

List of Figures

1-1. Graphical-Mode Login Session	1
1-2. Console Mode Login Session	2
1-3. The Terminal Icon on the KDE Panel	5
2-1. First Example of Partition Naming under GNU/Linux	11
2-2. Second Example of Partition Naming under GNU/Linux	11
4-1. Emacs, editing two files at once	21
4-2. Emacs, before copying the text block	22
4-3. <i>Emacs</i> , after having copied the text block	23
4-4. Starting position in VIM	24
4-5. VIM, before copying the text block	26
4-6. VIM, after having copied the text block	26
6-1. Monitoring Processes with top	40
8-1. A Not Yet Mounted Filesystem	47
8-2. Filesystem Is Now Mounted	47

Preface

1. About Mandrake Linux

Mandrake Linux is a *GNU/Linux* distribution supported by **MandrakeSoft** S.A. which was born on the Internet in 1998. Its main goal was and still is to provide an easy-to-use and friendly *GNU/Linux* system. **MandrakeSoft**'s two pillars are open source and collaborative work.

1.1. Contact Mandrake Community

Following are various Internet links pointing you to various **Mandrake Linux** related sources. If you wish to know more about the **MandrakeSoft** company, connect onto its web site (<http://www.mandrakesoft.com/>). You can also check out the **Mandrake Linux** distribution web site (<http://www.mandrakelinux.com/>) and all its derivatives.

Let us now speak about our open help platform. MandrakeExpert (<http://www.mandrakeexpert.com/>) is not just another web site where people help others with their computer problems in exchange for up-front fees, payable regardless of the quality of the service received. It offers a new experience based on trust and the pleasure of rewarding others for their contributions.

We also invite you to participate to the various mailing lists (<http://www.mandrakelinux.com/en/flists.php3>), where the **Mandrake Linux** community demonstrates its vivacity and keenness.

Finally, do not forget to connect to MandrakeSecure (<http://www.mandrakesecure.net/>). It gathers all security-related material about **Mandrake Linux** distributions. You will notably find security and bug advisories, as well as security and privacy-related articles. A must for any server administrator or user concerned about security.

1.2. Support Mandrake Linux

By popular request, **MandrakeSoft** offers its customers the possibility to participate financially to **MandrakeSoft**'s success. Through the Mandrake Users Club (<http://www.mandrakelinux.com/en/club/>) and Mandrake Corporate Club (<http://www.mandrakelinux.com/corporateclub>) you can:

- download commercial software normally only available in retail packs, such as software drivers, commercial applications, freeware, and demo versions;
- vote and propose new software through a volunteer-run RPM voting system;
- obtain discounts for products and services on MandrakeStore (<http://www.mandrakestore.com>);
- access a special MandrakeOnline offer with discounts, additional free accounts for gold (and higher) level members, and no advertising!
- obtain a copy of StarOffice 6.0 available to Silver members and above;
- access a better mirror list, exclusive to Club members (**experimental**);
- read multilingual forums and articles.

At MandrakeClub, your voice will be heard!

By financing **MandrakeSoft** through the MandrakeClub you will directly enhance the **Mandrake Linux** distribution and help us provide the best possible *GNU/Linux* desktop to our users.

1.3. Contribute to Mandrake Linux

The skills of the many talented folks who use **Mandrake Linux** can be very useful in the making of the **Mandrake Linux** system:

- packaging: a *GNU/Linux* system is mainly made of programs picked up on the Internet. They have to be packaged in order to work together.
- programming: there are many, many projects directly supported by **MandrakeSoft**: find the one that most appeals to you and offer your help to the main developer(s).

- internationalization: you can help us in the translation of web pages, programs and their respective documentation.
- documentation: last but not least, the manual you are currently reading requires a lot of work to stay up-to-date in regards with the rapid evolution of the system.

Consult the contributors page (<http://www.mandrakesoft.com/labs/>) to learn more about how you can contribute to the evolution of **Mandrake Linux**.

1.4. Purchasing Mandrake Products

Mandrake Linux fans wishing to purchase on-line may do so simply by accessing our MandrakeStore (<http://www.mandrakestore.com/>) e-commerce platform. You will not only find **Mandrake Linux** software, operating systems and network tools (*Multi Network Firewall*), but also special subscription offers, support, third-party software and licenses, documentation, *GNU/Linux*-related books, as well as other **MandrakeSoft** goodies.

2. Note from the Editor

As you may notice while you go from one chapter to another, this book is a composite document written by various authors. Even though much care has been taken in insuring technical and vocabulary consistency, the style of each author is somewhat preserved.

Some of the authors write in English even though it is not their native language. Therefore, you may notice strange sentence constructions. Do not hesitate to let us know if something is not clear to you.

In the open-source philosophy, contributors are always welcome! You may provide help to this documentation project by many different means. If you have a lot of time, you can write a whole chapter. If you speak a foreign language, you can help with the internationalization of this book. If you have ideas on how to improve the content, let us know. You can even alert us if you find typos!

For any information about the **Mandrake Linux** documentation project, please contact the documentation administrator (<mailto:documentation@mandrakesoft.com>) or visit the Mandrake Linux Documentation Project (<http://linux-mandrake.com/en/doc/project/>) web page.

3. Conventions Used in this Book

3.1. Typing Conventions

In order to clearly differentiate special words from the text flow, the documentation team uses different renderings. The following table shows examples of each special word or group of words with its actual rendering, as well as its signification.

Formatted Example	Meaning
<i>inode</i>	Used to stress a technical term.
<code>ls -lta</code>	Indicates commands or arguments to a command. Applied to commands, options and file names. Also see the section about <i>Commands Synopsis</i> , page iii.
<code>ls(1)</code>	Reference to a man page. To read the page in a <i>shell</i> (or command line), simply type <code>man 1 ls</code> .
<code>\$ ls *.pid</code>	We use this formatting for text snapshots of what you may see on your screen. It includes computer interactions, program listings, etc.
<code>localhost</code>	This is literal data which does not generally fit in any of the previously defined categories. For example, a key word taken from a configuration file.
<i>Apache</i>	Defines application names. The example used (“Apache”) is not a command name. However, in some contexts, the application and command name may be the same but formatted differently.

Formatted Example	Meaning
<u>F</u> iles	This is used for menu entries or graphical interface labels. The underlined letter indicates the keyboard shortcut, if applicable.
<i>SCSI-Bus</i>	Denotes a computer part or a computer itself.
<i>Le petit chaperon rouge</i>	This formatting identifies foreign language words.
Warning!	Of course, this is reserved for special warnings in order to stress the importance of words. Read out loud :-)



This icon highlights a note. Generally, it is a remark which gives additional information about a specific context.



This icon represents a tip. It can be a general advice on how to perform a particular action, or a nice feature that can make your life easier.



Be very careful when you see this icon. It always means that very important information about a specific subject will be dealt with.

3.2. General Conventions

3.2.1. Commands Synopsis

The example below shows the symbols you will see when the writer describes the arguments of a command:

```
command <non literal argument> [--option={arg1,arg2,arg3}]
[optional arg. ...]
```

These conventions are standard and you may find them elsewhere such as in the man pages.

The “<” (lesser than) and “>” (greater than) symbols denote a **mandatory** argument not to be copied verbatim, which should be replaced according to your needs. For example, <filename> refers to the actual name of a file. If this name is foo.txt, you should type foo.txt, not <foo.txt> or <filename>.

The square brackets (“[]”) denote optional arguments, which you may or may not include in the command.

The ellipsis (“...”) means an arbitrary number of items can be included.

The curly brackets (“{ }”) contain the arguments authorized at this specific place. One of them is to be placed here.

3.2.2. Special Notations

From time to time, you will be asked to press, for example, the keys Ctrl+R, which means you need to press and hold the Ctrl key and tap the R character as well. The same applies for the Alt and Shift keys.

Also about menus, going to menu item File→Reload user config (**Ctrl+R**) means: click on the File text displayed on the menu (generally located in the upper-left of the window). Then in the pull-down menu, click on the Reload user config item. Additionally, you are informed that you can use the Ctrl+R key combination (as described above) to get the same result.

3.2.3. System-Generic Users

Whenever possible, we use two generic users in our examples:

Queen Pingusa	This user is created at installation time.
Peter Pingus	This user is created afterwards by the system administrator.

Introduction

Welcome, and thank you for using **Mandrake Linux**! This manual is aimed at people wishing to dive into the depths of their *GNU/Linux* system, and who wish to exploit its huge capabilities. It is made up of three parts:

- In *The Linux System*, we introduce you to the command line and its various uses. We also discuss text-editing basics, which are essential under *GNU/Linux*.

“Basic UNIX System Concepts”, page 1 presents the *UNIX* and, more specifically, *GNU/Linux* worlds. It introduces the standard file-manipulation utilities as well as some useful features provided by the *shell*. It is very important that you fully understand the concepts discussed in this chapter before going on to *“Introduction to the Command Line”*, page 13. There is then a complementary chapter, *“Disks and Partitions”*, page 9, discussing the way hard disks are managed under *GNU/Linux*, as well as the concepts of partitioning.

Next, we cover *“Text Editing: Emacs and Vi”*, page 21. As most *UNIX* configuration files are text files, you will eventually want or need to edit them in a *text editor*. You will learn how to use two of the most famous text editors in the *UNIX* and *GNU/Linux* worlds: the mighty *Emacs* and the modern (!) *Vi*.

You should then be able to perform basic maintenance on your system. The following two chapters present practical uses of the command line (*“Command-Line Utilities”*, page 29), and process control (*“Process Control”*, page 39) in general.

- In *Linux in Depth*, we touch upon the *Linux* kernel and the filesystem architecture.

“File Tree Organization”, page 43 explores the organization of the file tree. *UNIX* systems tend to grow very large, but every file has its place in a specific directory. After reading this chapter, you will know where to look for files depending on their role in the system.

Then, we cover the topics of *filesystems* and *mount points* (*“Filesystems and Mount Points”*, page 47). We define both these terms as well as explain them with practical examples.

“The Linux Filesystem”, page 51 is dedicated to *GNU/Linux* filesystems. After presenting the available filesystems, we discuss file types and some additional concepts and utilities such as inodes and pipes. *“The /proc Filesystem”*, page 59 will introduce */proc*, a special *GNU/Linux* filesystem.

“The Start-Up Files: init sysv”, page 63 presents the **Mandrake Linux** boot-up procedure, and how to use it efficiently.

- In *Advanced Uses*, we finish up with topics which only the brave or very skilled users will want to put to practice. *“Building and Installing Free Software”*, page 65 will guide you through the necessary steps to build and install free software from sources. Reading through this chapter should encourage you to try it out, even though it might look intimidating at first. Finally, *“Compiling And Installing New Kernels”*, page 79 is one of the last steps towards total *GNU/Linux* autonomy. After reading and applying the theory explained in this chapter, start converting *Windows* users to *GNU/Linux* (if you haven’t started yet!).

We close this book with the two licenses generally used respectively for *GNU/Linux* software and documentation: *The GNU General Public License*, page 87 and *GNU Free Documentation License*, page 91. A *Glossary*, page 97 and the index concludes your Mandrake Linux — PowerPack ProSuite Edition documentation.

Chapter 1. Basic UNIX System Concepts

The name “*UNIX*” may be familiar to some of you. You may even use a *UNIX* system at work, in which case this chapter may not be very interesting.

For those of you who have never used a *UNIX* system, reading this chapter is absolutely necessary. Understanding the concepts which will be introduced here will answer a surprisingly high number of questions commonly asked by beginners in the GNU/Linux world. Similarly, some of these concepts will likely answer most of the problems you may encounter in the future.

1.1. Users and Groups

The concepts of users and groups are extremely important, because they will have a direct influence on all other ideas this chapter will introduce.

Linux is a true *multiuser* system, and in order to use your *GNU/Linux* machine, you must have an *account* on the machine. When you created a user during installation, you actually created a user account. In case you don’t remember, you were prompted for the following items:

- the “real name” of the user (which could actually be whatever you want)
- a *login* name
- and a *password* (you did enter one, didn’t you?).

The two important parameters here are the login name (commonly abbreviated to login) and password. You must have these in order to access the system.

When you create a user, a default group is also created. As we will see later, groups are useful when you have to share files between several people. A group may contain as many users as you wish, and it is very common to see such a separation in large systems. For example, in a university, you could have one group per department, another group for teachers, and so on. The opposite is also true: a user can be a member of one or more groups, with a maximum of thirty- two. A math teacher, for example, can be a member of the teachers’ group and also of his beloved math students’ group.

Now that we’ve covered the background information, let’s look at how to actually log in.

If you chose to have *X* automatically start on boot-up, your startup screen will look similar to figure 1-1.

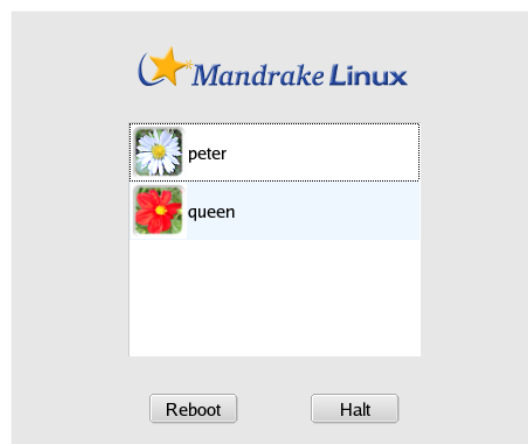


Figure 1-1. Graphical-Mode Login Session

In order to login, you must first select your account from the list. A new dialog will be displayed, prompting you for your password. Note that you will have to type in your password blindly, because the characters will be echoed onscreen as stars * instead of the characters you typed in the password field. You can also choose your session type (window manager). Once you’re ready, press the Login button.

If you are in console or “text” mode, your screen will look similar to figure 1-2.

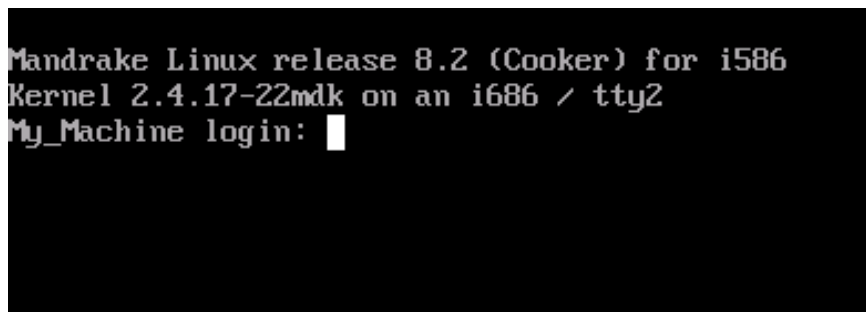


Figure 1-2. Console Mode Login Session

To login, enter your login name at the Login: prompt and press Enter. Next, the login program (called, *login*) will display a Password: prompt and will wait for your password to be entered. Like the graphic mode login, the console login will not echo the characters you're typing to the screen.

Note that you can login several times with the same account on additional *consoles* and under *X*. Each session you open is independent from others, and it is even possible to have several *X* sessions opened concurrently. By default, **Mandrake Linux** has six *virtual consoles* in addition to the one reserved for the graphical interface. You can switch to any of them by pressing the key sequence **Ctrl-Alt-F<n>**, where <n> is the number of the console that you want to switch to. By default, the graphical interface is on console number 7. So, to switch to the second console, you would simultaneously press Ctrl, Alt and the F2 keys.

During installation, *DrakX* also prompted you for the password of a very special user: root . root is the system administrator, which will most likely be yourself. For your system's security, it is very important that the root account always be protected with a good password!

If you regularly login as root, it is very easy to make a mistake which can turn your system unusable – one single mistake can do it. In particular, if you have not set a password for the root account, then **any** user can alter **any** part of your system (even other operating systems on your machine!). Obviously, this is not a good idea.

It is worth mentioning that internally, the system does not identify you with your login name. Instead, it uses a unique number assigned to the name: the *User ID* (UID for short) . Similarly, every group is identified by its *Group ID* (*GID*) and not its name.

1.2. File Basics

Files are another area where *GNU/Linux* differs greatly from *Windows* and most other *operating systems*. We will cover the most obvious differences here. For more information, see the The Linux Filesystem chapter.

The major differences result directly from the fact that *Linux* is a multiuser system: every file is the exclusive property of one user and one group. One thing we did not mention about users and groups is that every one of them possesses a personal directory (called the *home directory*). The user is the owner of this directory and of all files they create.

However, this would not be very useful if that were the only notion of file ownership. As the file owner, a user can set **permissions** on the files. These permissions distinguish between three categories of users: the owner of the file, every user who is a member of the group associated with the file (also called the *owner group*) but who is not the owner, and others, which includes every other user who is neither the owner nor a member of the owners' group.

There are three different permissions:

1. *Read* permission (*r*): enables the contents of a file to be read. For a directory, this allows its contents (i.e. the files in this directory) to be listed.
2. *Write* permission (*w*): allows the modification of a file's contents. For a directory, write permission allows a user to add and/or remove files from this directory, even if they are not the owner of these files.
3. *eXecute* permission (*x*): enables a file's execution (so only executable files would normally have this permission set). For a directory, this allows a user to *traverse* it, which means going into or through that

directory. Note that this is different than read access: you may be able to traverse a directory but be unable to read its contents!

Every combination of these permissions is possible. For example, you can allow only yourself to read the file and forbid it to all other users. You can even do the opposite, even if it's not very logical at a first glance... As the file owner, you can also change the owner group (if and only if you are a member of the new group), and even deprive yourself of the file (that is, change its owner). Of course, if you deprive yourself of the file, you will lose all your rights to it.

Let's take the example of a file and a directory. The display below represents entering the `ls -l` command from the *command line*:

```
$ ls -l
total 1
-rw-r----- 1 queen  users          0 Jul  8 14:11 a_file
drwxr-xr--  2 peter  users       1024 Jul  8 14:11 a_directory/
$
```

The results of the `ls -l` command are (from left to right):

- The first ten characters represent the file's type and the permissions associated with it. The first character is the file's type: if it is a regular file, it will contain a dash (-). If it's a directory, the leftmost character will be a d. There are other file types, which we will talk about in the *Reference Manual*. The next nine characters represent the permissions associated with that file. The nine characters are actually three groups of three permissions. The first group of three characters represent the rights associated to the file owner, the next three apply to all users belonging to the same group but who are not the owner, and the last three apply to others. A dash (-) means that the permission is not set.
- Next comes the number of links for the file. We will see in the *Reference Manual* that the unique identifier of a file is not its name, but a number (the *inode number*), and that it is possible for one file on disk to have several names. For a directory, the number of links has a special meaning, which will also be discussed in greater detail in the *Reference Manual*.
- The next piece of information is the name of the file owner and the name of the owner group.
- Finally, the size of the file (in *bytes*) and its last modification time are displayed, with the name of the file or directory itself being the end of the line.

Let's take a closer look at the permissions associated with each of these files. First of all, we must strip off the first character representing the type, and for the file `a_file`, we get the following rights: `rw-r-----`. Here's a breakdown of the permissions.

- the first three characters (`rw-`) are the file owner's rights, which in this case is queen. Therefore, queen has the right to read the file (`r`), to modify its contents (`w`) but not to execute it (`-`).
- the next three characters (`r--`) apply to any user who is not queen but who is a member of the `users` group. They will be able to read the file (`r`), but not write or execute it (`--`).
- the last three characters (`---`) apply to any user who is not queen and is not a member of the `users` group. Those users won't have any rights on the file at all.

For the directory `a_directory`, the rights are `rwxr-xr--`, so:

- peter, as the directory owner, can list files contained inside (`r`), add or remove files from that directory (`w`), and can traverse it (`x`)
- each user who is not peter, but a member of the `users` group, will be able to list files in this directory (`r`), but not remove or add files (`-`), and will be able to traverse it (`x`)
- every other user will only be able to list the contents of this directory (`r`). Because they don't have `wx` permissions, they won't be able to write files or enter the directory.

There is **one** exception to these rules: `root`. `root` can change attributes (permissions, owner and group owner) of all files, even if he's not the owner, and could therefore grant himself ownership of the file! He can read files on which he has no read permission, traverse directories which he would normally have no access to, and so

on. And if he lacks a permission, he just has to add it. *root* has complete control of the system, which involves a certain amount of trust in the person wielding the *root* password.

Lastly, it is worth noting the differences between file names in the *UNIX* and the *Windows* worlds. For one, *UNIX* allows for a much greater flexibility and has fewer limitations:

- a file name may contain any character, including non-printable ones, except ASCII character 0, which is the end of a string, and /, which is the directory separator). Moreover, *UNIX* is case sensitive: the files *readme* and *Readme* are different, because *r* and *R* are considered two **different** characters under *UNIX*-based systems.
- As you may have noticed, a file name does not have to include an extension, unless that's the way you prefer to name your files. File extensions do not identify the contents of files under *GNU/Linux* or almost any other operating system. So-called "file extensions" are quite convenient though. The period (.) under *UNIX* is just one character among others, but it does have one special meaning. Under *UNIX*, file names beginning with a period are "hidden files", which also includes directories whose names start with a .



However it is worth noting that many graphical applications (file managers, office applications, etc.) actually use file extensions to recognize files. It is therefore a good idea to use file name extensions for those applications that support it.

1.3. Processes

A *process* defines an instance of a program being executed and its *environment*. We will only mention the most important differences; you should refer to the *Reference Manual* for a more in-depth discussion on this subject.

The most important difference is directly related to the user concept: each process is executed with the rights of the user who launched it. Internally, the system identifies processes with a unique number, called the *process ID*, or *PID*. From this *PID*, the system knows who (which user, that is) has launched the process and a number of other pieces of information and only needs to verify the process' "validity". So, if we take our *a_file* example, a process launched by *peter* will be able to open this file in *read-only mode*, but not in *read-write mode* because the permissions associated with the file forbid it. The exception to this rule is *root*, which as we've explained, can do anything they wish.

Thanks to this, *GNU/Linux* is virtually immune against viruses. In order to operate, viruses must infect executable files. As a user, you do not have write access to vulnerable system files, so the risk is greatly reduced. Generally speaking, viruses are very rare in the *UNIX* world. There are less than a dozen known viruses for *Linux*, and they are harmless when executed by a normal user. Only one user can damage a system by activating these viruses: *root*.

Interestingly enough, anti-virus software does exist for *GNU/Linux*, but mostly for *DOS/Windows* files. Why are there anti-virus programs running on *GNU/Linux* which focus on *DOS/Windows*? More and more often, you will see *GNU/Linux* file servers acting as file servers for *Windows* machines with the help of the *Samba* software package.

Linux makes it easy to control processes. One way is through "Signals", which allow you to suspend a process or kill it by sending the corresponding signal to the process. However, you are limited to sending signals to your own processes; With the exception of *root*, *UNIX* won't allow you to send signals to a process launched by any other user. In "Process Control", page 39, you will learn how to obtain the *PID* of a process and send it signals.

1.4. Small Introduction to the Command Line

The command line is the most direct way to send commands to your machine. If you use the *GNU/Linux* command line, you will soon find that it is much more powerful and capable than other command prompts you may have previously encountered. This power is available because you have access, not only to all *X* applications, but also to thousands of utilities in console mode (as opposed to graphical mode) which do not have graphical equivalents, with their many options and possible combinations that would be hard to access in the form of buttons or menus.

Admittedly, most people require a little help to get started. If you're not already working in console mode and are using the graphical interface, the first thing to do is to launch a terminal emulator. Access the *GNOME* or *KDE* application menu (depending on which window manager you're using), where you will find a number of emulators under *Terminals*. Choose the one you want, for example *Konsole* or *XTerm*. Depending on your user interface, there may also be an icon that clearly identifies it on the panel (figure 1-3).



Figure 1-3. The Terminal Icon on the KDE Panel

When you launch this terminal emulator, you actually use a *shell*. This is the name of the program which you interact with. You will find yourself in front of the *prompt*:

```
[queen@localhost queen]$
```

This assumes that your user name is *queen* and that your machine's name is *localhost* (which is the case if your machine is not part of an existing network). After the prompt is space for you to type your commands. Note that when you are root, the prompt's \$ character turns into a # (this is true only in the default configuration, since you can customize all such details in *GNU/Linux*). In order to become root, type *su* after launching a *shell*.

```
# Enter the root password; it will not appear on the screen
[queen@localhost queen]$ su
Password:
# exit will make you come back to your normal user account
[root@localhost queen]# exit
[queen@localhost queen]$
```

Anywhere else in the book, the prompt will be symbolically represented by a \$, whether you are a normal user or root. You will be told when you have to be root to execute a command, so please remember the *su* command.

When you *launch* a *shell* for the first time, you normally find yourself in your home directory. To display the directory you are currently in, type *pwd* (which stands for *Print Working Directory*):

```
$ pwd
/home/queen
```

Next we will look at a few basic commands, which you should see are quite useful.

1.4.1. cd: Change Directory

The *cd* command is just like *DOS*', with a few extras. It does just what its acronym states, changes the working directory. You can use *.* and *..*, which respectively stand for the current and parent directories. Typing *cd* alone will take you back to your home directory. Typing *p* will take you back to the last directory you visited. And lastly, you can specify peter's home directory by typing *cd ~peter* (~ on its own means your own home directory). Note that as a normal user, you usually cannot go into another user's home directory (unless she explicitly authorized it or if this is the default configuration on the system), unless you are root, so let's become root and practice:

```
$ pwd
/root
$ cd /usr/share/doc/HOWTO
$ pwd
/usr/share/doc/HOWTO
```

```
$ cd ../FAQ-Linux
$ pwd
/usr/share/doc/FAQ-Linux
$ cd ../../../../lib
$ pwd
/usr/lib
$ cd ~peter
$ pwd
/home/peter
$ cd
$ pwd
/root
```

Now, go back to being a normal user again by typing `exit`.

1.4.2. Some Environment Variables and the `echo` Command

All processes have their *environment variables* and the *shell* allows you to view them directly with the `echo` command. Some interesting variables are:

1. `HOME`: this environment variable contains a string that represents your home directory.
2. `PATH`: this variable holds the list of all directories in which the *shell* should look for executables when you type a command. Note that unlike *DOS*, by default a *shell* will **not** look for commands in the current directory!
3. `USERNAME`: this variable contains your login name.
4. `UID`: this one holds your user ID.
5. `PS1`: this variable determines what your prompt will display, and is often a combination of special sequences. You may read the `bash(1)` *manual page* for more information.

To have the *shell* print a variable's value, you must put a `$` in front of its name. Here, the `echo` command will give an example:

```
$ echo Hello
Hello
$ echo $HOME
/home/queen
$ echo $USERNAME
queen
$ echo Hello $USERNAME
Hello queen
$ cd /usr
$ pwd
/usr
$ cd $HOME
$ pwd
/home/queen
```

As you can see, the *shell* substitutes the variable's value before it executes the command. Otherwise, our `cd $HOME` example would not have worked. In fact, the shell first replaced `$HOME` by its value, `/home/queen`, so the line became `cd /home/queen`, which is what we wanted. The same thing happened with the `echo $USERNAME` example.

1.4.3. cat: Print the Contents of One or More Files to the Screen

Nothing much to say, this command does just that: print the contents of one or more files to the standard output, normally the screen:

```
$ cat /etc/fstab
/dev/hda5 / ext2 defaults 1 1
/dev/hda6 /home ext2 defaults 1 2
/dev/hda7 swap swap defaults 0 0
/dev/hda8 /usr ext2 defaults 1 2
/dev/fd0 /mnt/floppy auto sync,user,noauto,nosuid,nodev 0 0
none /proc proc defaults 0 0
none /dev/pts devpts mode=0620 0 0
/dev/cdrom /mnt/cdrom auto user,noauto,nosuid,exec,nodev,ro 0 0
$ cd /etc
$ cat modules.conf shells
alias parport_lowlevel parport_pc
pre-install plip modprobe parport_pc ; echo 7 > /proc/parport/0/irq
#pre-install pcmcia_core /etc/rc.d/init.d/pcmcia start
#alias char-major-14 sound
alias sound esssolo1
keep
/bin/zsh
/bin/bash
/bin/sh
/bin/tcsh
/bin/csh
/bin/ash
/bin/bsh
/usr/bin/zsh
```

1.4.4. less: a Pager

The name is a play on words related to the first pager ever used under *UNIX*, called *more*. A *pager* is a program that allows a user to view long files page-by-page (more accurately, screen by screen). The reason that we explain *less* rather than *more* is that *less* is much more intuitive. You should use *less* to view large files that do not fit on a single screen. For example:

```
less /etc/termcap
```

To browse through this file, use the up and down arrow keys. Use **q** to quit. *less* can do far more than just that – press **h** for help to display the various options available.

1.4.5. ls: Listing Files

The *ls* (*LiSt*) command is equivalent to *DOS*' *dir* command, but it can do much much more. In fact, this is largely because files can do more too. The command syntax for *ls* is:

```
ls [options] [file|directory] [file|directory...]
```

If no file or directory is specified on the command line, *ls* will list files in the current directory. Its options are very numerous, so we will only explain a few of them:

- **-a**: lists all files, including *hidden files*. Remember that in *UNIX*, hidden files are those whose names begin with a **.**; the **-A** option lists “almost” all files, which means every file the **-a** option would print except for **“.”** and **“..”**
- **-R**: lists recursively, i.e. all files and subdirectories of directories entered on the command line.
- **-s**: prints the file size in kilobytes next to each file.

- `-l`: prints additional information about the files.
- `-i`: prints the inode number (the file's unique number on a file system, see chapter The Linux Filesystem) next to each file.
- `-d`: treats directories on the command line as if they were normal files rather than listing their contents.

Here are some examples:

- `ls -R`: recursively lists the contents of the current directory
- `ls -is images/ .`: lists the inode number and the size in kilobytes for each file in the `images/` directory and in the parent of the current directory.
- `ls -al images/*.png`: lists all files (including any hidden files) in the `images/` directory whose names end with `.png`, including the file `.png`, if it exists.

1.4.6. Useful Keyboard Shortcuts

There are a number of shortcuts available, with the primary advantage being that they save you a lot of typing time. This section assumes you are using the default *shell* provided with **Mandrake Linux**, *bash*, but these keystrokes should work with other shells too.

First: the arrow keys. *bash* maintains a history of previous commands which you can view with the up and down arrow keys. You can scroll up to a maximum number of lines defined in the HISTSIZE environment variable. In addition, the history is persistent from one session to another, so you will not lose the commands you typed in previous sessions.

The left and right arrow keys move the cursor left and right on the current line, allowing you to edit your commands. But there is more to editing than just moving one character at a time: `Ctrl+A` and `Ctrl+E`, for example, will bring you to the beginning and the end of the current line. The Backspace and `Del` keys work as expected. Backspace and `Ctrl+H` are equivalent. `Del` and `Ctrl+D` can also be used interchangeably. `Ctrl+K` will delete from the position of the cursor to the end of line, and `Ctrl+W` will delete the word before the cursor.

Typing `Ctrl+D` on a blank line will let you close the current session, which is much shorter than having to type `exit`. `Ctrl+C` will interrupt the currently running command, except if you were in the process of editing your command line, in which case it will cancel the editing and get you back to the prompt. `Ctrl+L` clears the screen.

Finally, there are `Ctrl+S` and `Ctrl+Q`, which are used to suspend and restore output to the screen. They are not used often, but you might type `Ctrl+S` by mistake (after all, **S** and **D** are close to each other on the keyboard). So, if you get into the situation where you're typing but don't see any characters appearing on the *Terminal*, try `Ctrl+Q`. Note that all the characters you typed between the unwanted `Ctrl+S` and `Ctrl+Q` will be printed to the screen all at once.

Chapter 2. Disks and Partitions

This chapter contains information for users that are performing an expert installation of **Mandrake Linux** or for those that simply wish to know more about the technical details underlying their system.

This section provides a complete description of the *PC* partitioning scheme, so it will be most useful if you will be manually configuring the partitions of your hard drive. Because the installer will do all of this automatically, it is not critical to understand everything if you perform a standard installation. However, if you're going to perform an expert install, the information in this chapter will be important.

2.1. Structure of a Hard Disk

Basically, a disk is physically divided into sectors. A sequence of sectors can form a partition. Roughly speaking, you can create as many partitions as you wish; each of them is regarded as a single hard drive.

2.1.1. Sectors

To simplify, a hard disk is merely a sequence of *sectors*, which are the smallest data unit on a hard disk. The typical size of a sector is 512 bytes. The sectors on a hard disk of (*n*) sectors are numbered from (0) to (*n*-1).

2.1.2. Partitions

The use of multiple partitions enables you to create many virtual hard drives on your real physical drive. This has many advantages:

- Different operating systems use different disk structures (called file systems): this is the case for *Windows* and *GNU/Linux*. Having multiple partitions on a hard drives allows you to install various operating systems on the same physical drive.
- For performance reasons, a single operating system may prefer different drives with various file-systems on them because they are used for completely different things. One example is *GNU/Linux* which requires a second partition called "swap". This partition is used by the virtual memory manager as virtual memory.
- Even if all of your partitions use the same file-system, it may prove useful to separate the different parts of your OS. In the simplest configuration, you can split your files into two partitions, one for your personal data, and another for programs. This allows you to update your OS, completely erasing the partition containing the programs while keeping the data partition safe.
- Physical errors on a hard disk are generally located on adjacent sectors and not scattered across the disk. Distributing your files onto different partitions will limit data loss in case of hard disk physical damage.

Normally, the partition type specifies the file-system that the partition is supposed to contain. Each operating system recognizes some of the partition types, but not others. See the chapter about *GNU/Linux* file-systems in the *Reference Manual* for more information.

2.1.3. Define the Structure of your Disk

2.1.3.1. The Simplest Way

The simplest configuration will have only two partitions: one for the swap space, the other for the files ¹.



The rule of thumb for the swap partition size is to set it for twice the size of your RAM memory. However for large memory configurations (>512 MB), this rule is not as critical, and smaller sizes are acceptable.

1. the file system used currently for *GNU/Linux* files is called `ext3`

2.1.3.2. Another Common Scheme

Separate data from programs. To be even more efficient, one usually defines a third partition called the “root” and labeled as /. It will contain the programs required to startup your system and perform basic maintenance.

So we could define four partitions:

Swap

A partition of type swap, whose size is roughly twice the amount of physical RAM.

Root: /

The most important partition. Not only does it contain critical data and programs for the system, but will also act as a mount point for other partitions.

The needs of the root partition in terms of size are very limited, 300MB is generally enough. However, if you plan to install commercial applications, which are most often located in /opt, you will need to increase the size of the root partition. Alternatively, you may create a separate partition for /opt.

Static data: /usr

Most packages install the majority of their executables and data files under /usr. The advantage to creating a separate partition is that it allows you to easily share it with other machines over a network.

The recommended size depends on the packages you wish to install, and can vary from 100MB for a lightweight installation to several GB for a full install. A compromise of one or two GB (depending on your disk size) is usually sufficient.

Home directories: /home

This directory contains the personal directories for all the users hosted on the machine. It also generally hosts the directories served by HTTP for web browsers and FTP for file transfers.

The partition size depends on the number of users (or services) hosted and their needs.

A variation on this solution is not to create a separate partition for the /usr files: /usr will simply be a directory inside the root / partition.

2.1.3.3. Exotic Configurations

When setting up your machine for specific uses such as a web server or a firewall, the needs are radically different than for a standard desktop machine. For example, a FTP server will probably need a large separate partition for /var/ftp, while the /usr will be relatively small. In these situations, you are encouraged to carefully think about your needs before even beginning the install process.



If you've been using your system for a while and realize that you should have chosen different sizes and partition scheme, it is possible to resize most partitions without the need to reinstall your system and without the loss of your data. Consult *Managing Your Partitions* of the *Starter Guide* .

With a little bit of practice, you will even be able to move a crowded partition to a brand new hard drive.

2.2. Conventions for Naming Disks and Partitions

GNU/Linux uses a logical method for naming partitions. First, when numbering the partitions, it ignores the file-system type of each partition that you may have. Second, it names the partitions according to the disk on which they are located. This is how the disks are named:

- the primary master and primary slave IDE devices (whether they be hard disks, CD-ROM drives or anything else) are called `/dev/hda` and `/dev/hdb` respectively;
- on the secondary interface, the master is called `/dev/hdc` and the slave is `/dev/hdd`
- if your computer contains other IDE interfaces (for example, the IDE interface present on some Soundblaster cards), the disks will be called `/dev/hde`, `/dev/hdf`, etc. You may also have additional IDE interfaces if you have RAID cards or RAID chips on your motherboard.
- SCSI disks are called `/dev/sda`, `/dev/sdb`, etc., in the order of their appearance on the SCSI chain (depending on the increasing *IDs*). The SCSI CD-ROM drives are called `/dev/scd0`, `/dev/scd1`, always in the order of their appearance on the SCSI chain.

The partitions are named after the disk on which they are found, in the following way (in the example, we have used the case of partitions on a primary master IDE disk):

- the primary (or extended) partitions are named `/dev/hda1` through `/dev/hda4` when present;
- logical partitions, if any, are named `/dev/hda5`, `/dev/hda6`, etc. in their order of appearance in the table of logical partitions.

So *GNU/Linux* will name the partitions as follows:

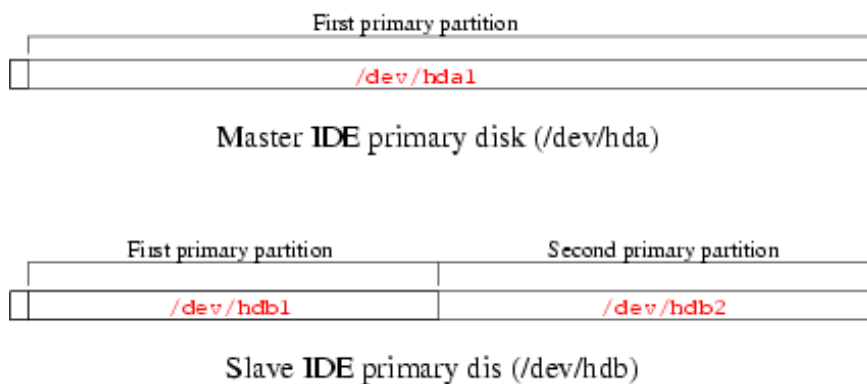


Figure 2-1. First Example of Partition Naming under GNU/Linux

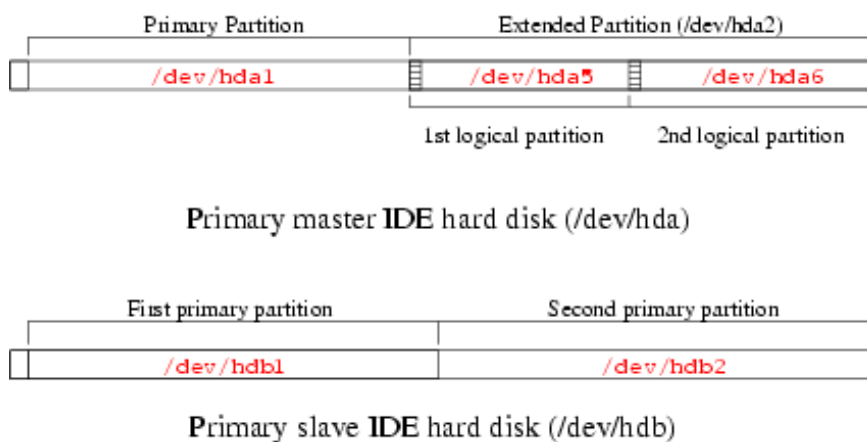


Figure 2-2. Second Example of Partition Naming under GNU/Linux

With this knowledge in hand, you should be able to name the various partitions and hard disks when you need to manipulate them. You will also see that *GNU/Linux* names the partitions even if it does not know how to manage them initially (it ignores the fact that they are not native *GNU/Linux* partitions).



For current 2.4 kernels, **Mandrake Linux** uses the Linux DevFS (Device File System) (<http://www.atnf.csiro.au/~rgooch/linux/docs/devfs.html>). This system ensures full compatibility with the scheme described above, but this compatibility may disappear in the future. Each device is dynamically added to the system as soon as it becomes available or needed.

For example, the first IDE hard drive now becomes:

```
[root@localhost root]# ls -l /dev/hda
lr-xr-xr-x  1 root    root          32 Sep  2 17:14 /dev/hda
-> ide/host0/bus0/target0/lun0/disc
```


Chapter 3. Introduction to the Command Line

In the chapter “*Basic UNIX System Concepts*”, page 1, you were shown how to launch a *shell*. In this chapter, we will show you how to work with it.

The *shell*’s main asset is the number of existing utilities: there are thousands of them, and each one is devoted to a particular task. We will only look at a (very) small number of them here. One of *UNIX*’s greatest assets is the ability to combine these utilities, as we shall see later.

3.1. File-Handling Utilities

In this context, file handling means copying, moving and deleting files. Later, we will look at ways of changing their attributes (owner, permissions).

3.1.1. mkdir, touch: Creating Empty Directories and Files

`mkdir` (*MaKe DIRectory*) is used to create directories. Its syntax is simple:

```
mkdir [options] <directory> [directory ...]
```

Only one option is worth noting: the `-p` option. It does two things:

1. it will create parent directories if they did not exist before. Without this option, `mkdir` would just fail, complaining that the said parent directories do not exist;
2. it will return silently if the directory which you want to create already exists. Similarly, if you did not specify the `-p` option, `mkdir` will send back an error message, complaining that the directory already exists.

Here are some examples:

- `mkdir foo`: creates a directory `foo` in current directory;
- `mkdir -p images/misc docs`: creates the `misc` directory in the `images` directory. First, it creates the latter if it does not exist (`-p`); it also creates a directory named `docs` in the current directory.

Initially, the `touch` command was not intended for creating files but for updating file access and modification times¹. However, `touch` will create the files listed as empty files if they do not exist. The syntax is:

```
touch [options] file [file...]
```

So running the command:

```
touch file1 images/file2
```

will create an empty file called `file1` in the current directory and an empty file `file2` in directory `images`, if the files did not previously exist.

3.1.2. rm: Deleting Files or Directories

The `rm` command (*ReMove*) replaces the *DOS* commands `del` and `deltree`, and adds more options. Its syntax is as follows:

```
rm [options] <file|directory> [file|directory...]
```

Options include:

- `-r`, or `-R`: delete recursively. This option is **mandatory** for deleting a directory, empty or not. However, you can also use `rmdir` to delete empty directories.

1. In *UNIX*, there are three distinct timestamps for each file: the last file access date (`atime`), i.e. the last date when the file was opened for read or write; the last date when the inode attributes were modified (`mtime`); and finally, the last date when the **contents** of the file were modified (`ctime`).

- `-i`: request confirmation before each deletion. Note that by default in **Mandrake Linux**, `rm` is an *alias* to `rm -i`, for safety reasons (similar aliases exist for `cp` and `mv`). Your mileage may vary as to the usefulness of these aliases. If you want to remove them, you can create an empty `~/.alias` file that will prevent setting system wide aliases. Alternatively you can edit your `~/.bashrc` file to disable some of the system wide aliases by adding this line: `unalias rm cp mv`
- `-f`, the opposite of `-i`, forces deletion of the files or directories, even if the user has no write access on the files².

Some examples:

- `rm -i images/*.jpg file1`: deletes all files with names ending in `.jpg` in the `images` directory and deletes `file1` in the current directory, requesting confirmation for each file. Answer `y` to confirm deletion, `n` to cancel.
- `rm -Rf images/misc/ file*`: deletes, without requesting confirmation, the whole directory `misc/` in the `images/` directory, together with all files in the current directory whose names begin with `file`.



Using `rm` deletes files **irrevocably**. There is no way to restore them.
³! Do not hesitate to use the `-i` option to ensure you do not delete something by mistake.

3.1.3. `mv`: Moving or Renaming Files

The syntax of the `mv` (*MoVe*) command is as follows:

```
mv [options] <file|directory> [file|directory ...] <destination>
```

Some options:

- `-f`: forces operation – no warning if an existing file is overwritten.
- `-i`: the opposite. Asks the user for confirmation before overwriting an existing file.
- `-v`: *verbose* mode, report all changes and activity.

Some examples:

- `mv -i /tmp/pics/*.png .`: move all files in the `/tmp/pics/` directory whose names end with `.png` to the current directory (`.`), but request confirmation before overwriting any files already there.
- `mv foo bar`: rename file `foo` to `bar`. If a `bar` directory already existed, the effect of this command would be to move file `foo` or the whole directory (the directory itself plus all files and directories in it, recursively) into the `bar` directory.
- `mv -vf file* images/ trash/`: move, without requesting confirmation, all files in the current directory whose names begin with `file`, together with the entire `images/` directory to the `trash/` directory, and show each operation carried out.

2. It is enough for the user to have write access to the **directory** to be able to delete files in it, even if he is not the owner of the files.

3.1.4. cp: Copying Files and Directories

`cp` (*CoPy*) replaces the *DOS* commands `copy` and `xcopy` and adds more options. Its syntax is as follows:

```
cp [options] <file|directory> [file|directory ...] <destination>
```

`cp` has a lot of options. Here are the most common:

- `-R`: recursive copy; **mandatory** for copying a directory, even an empty directory.
- `-i`: request confirmation before overwriting any files which might be overwritten.
- `-f`: the opposite of `-i`, replaces any existing files without requesting confirmation.
- `-v`: verbose mode, displays all actions performed by `cp`.

Some examples:

- `cp -i /timages/* images/`: copies all files in the `/timages/` directory to the `images/` directory located in the current directory. It requests confirmation if a file is going to be overwritten.
- `cp -vR docs/ /shared/mp3s/* mystuff/`: copies the whole `docs` directory, plus all files in the `/shared/mp3s` directory to the `mystuff` directory.
- `cp foo bar`: makes a copy of the `foo` file under the name `bar` in the current directory.

3.2. Handling File Attributes

The series of commands shown here are used to change the owner or owner group of a file or its permissions. We looked at the different permissions in chapter Basic UNIX System Concepts.

3.2.1. chown, chgrp: Change the Owner and Group of One or More Files

The syntax of the `chown` (*CHange OWNer*) command is as follows:

```
chown [options] <user[.group]> <file|directory> [file|directory...]
```

The options include:

- `-R`: recursive. To change the owner of all files and subdirectories in a given directory.
- `-v`: verbose mode. Displays all actions performed by `chown`; reports which files have changed ownership as a result of the command and which files have not been changed.
- `-c`: like `-v`, but only reports which files have been changed.

Some examples:

- `chown nobody /shared/book.tex`: changes the owner of the `/shared/book.tex` file to `nobody`.
- `chown -Rc queen.music *.mid concerts/`: changes the ownership of all files in the current directory whose name ends with `.mid` and all files and subdirectories in the `concerts/` directory to user `queen` and group `music`, reporting only files affected by the command.

The `chgrp` (*CHange GRouP*) command lets you change the group ownership of a file (or files); its syntax is very similar to that of `chown`:

```
chgrp [options] <group> <file|directory> [file|directory...]
```

The options for this command are the same as for `chown`, and it is used in a very similar way. Thus, the command:

```
chgrp disk /dev/hd*
```

changes the ownership of all files in directory `/dev/` with names beginning with `hd` to group `disk`.

3.2.2. chmod: Changing Permissions on Files and Directories

The `chmod` (*CHange MODe*) command has a very distinct syntax. The general syntax is:

```
chmod [options] <change mode> <file|directory> [file|directory...]
```

but what distinguishes it is the different forms that the mode change can take. It can be specified in two ways:

1. in octal. The owner user permissions then correspond to figures with the form `<x>00`, where `<x>` corresponds to the permission assigned: 4 for read permission, 2 for write permission and 1 for execute permission. Similarly, the owner group permissions take the form `<x>0` and permissions for “others” the form `<x>`. Then, all you need to do is add together the assigned permissions to get the right mode. Thus, the permissions `rwxr-xr--` correspond to $400+200+100$ (owner permissions, `rw`) + $40+10$ (group permissions, `r-x`) + 4 (others’ permissions, `r--`) = 754; in this way, the permissions are expressed in absolute terms. This means that previous permissions are unconditionally replaced;
2. with expressions. Here permissions are expressed by a sequence of expressions separated by commas. Hence an expression takes the following form: `[category]<+|-|=><permissions>`.

The category may be one or more of:

- `u` (*User*, permissions for owner);
- `g` (*Group*, permissions for owner group);
- `o` (*Others*, permissions for “others”).

If no category is specified, changes will apply to all categories. A `+` sets a permission, a `-` removes the permission and a `=` sets the permission. Finally, the permission is one or more of the following:

- `r` (*Read*);
- `w` (*Write*) or;
- `x` (*eXecute*).

The main options are quite similar to those of `chown` and `chgrp`:

- `-R`: changes permissions recursively.
- `-v`: verbose mode. Displays the actions carried out for each file.
- `-c`: like `-v` but only shows files affected by the command.

Examples:

- `chmod -R o-w /shared/docs`: recursively removes write permission for others on all files and subdirectories in the `/shared/docs/` directory.
- `chmod -R og-w,o-x private/`: recursively removes write permission for group and others for the whole `private/` directory, and removes the execution permission for others.
- `chmod -c 644 misc/file*`: changes permissions of all files in the `misc/` directory whose names begin with `file` to `rw-r--r--` (i.e. read permission for everyone and write permission only for the owner), and reports only files affected by this command.

3.3. Shell Globbing Patterns

You probably already use *globbing* characters without knowing it. When you specify a file in *Windows* or when you look for a file, you use `*` to match a random string. For example, `*.txt` matches all files with names ending with `.txt`. We also used it heavily in the last section. But there is more to globbing than just `*`.

When you type a command like `ls *.txt` and press Enter, the task of finding which files match the `*.txt` pattern is not done by the `ls` command, but by the *shell* itself. This requires a little explanation about how a command line is interpreted by the *shell*. When you type:

```
$ ls *.txt
readme.txt  recipes.txt
```

the command line is first split into words (`ls` and `*.txt` in this example). When the shell sees a `*` in a word, it will interpret the whole word as a globbing pattern and will replace it with the names of all matching files. Therefore, the command, just before the shell executes it, has become `ls readme.txt recipe.txt`, which gives the expected result. Other characters make the shell react this way too:

- `?`: matches one and only one character, regardless of what that character is;
- `[...]`: matches any character found in the brackets. Characters can be referred to either as a range of characters (i.e. 1–9) or *discrete values*, or even both. Example: `[a-zA5-7]` will match all characters between a and z, a B, an E, a 5, a 6 or a 7;
- `[!...]`: matches any character **not** found in the brackets. `[!a-z]`, for example, will match any character which is not a lowercase letter⁴;
- `{c1,c2}`: matches `c1` or `c2`, where `c1` and `c2` are also globbing patterns, which means you can write `{[0-9]*,[acr]}` for example.

Here are some patterns and their meanings:

- `/etc/*conf`: all files in the `/etc` directory with names ending in `conf`. It can match `/etc/inetd.conf`, `/etc/conf.linuxconf`, **and also** `/etc/conf` if such a file exists. Remember that `*` can also match an empty string.
- `image/{cars,space[0-9]}/*.jpg`: all file names ending with `.jpg` in directories `image/cars`, `image/space0`, (...), `image/space9`, if those directories exist.
- `/usr/share/doc/*/README`: all files named `README` in all of `/usr/share/doc`'s immediate subdirectories. This will make `/usr/share/doc/mandrake/README` match, for example, but not `/usr/share/doc/myprog/doc/README`.
- `*[!a-z]`: all files with names that do **not** end with a lowercase letter in the current directory.

3.4. Redirections and Pipes

3.4.1. A Little More About Processes

To understand the principle of redirections and pipes, we need to explain a notion about processes which has not yet been introduced. Most *UNIX* processes (this also includes graphical applications but excludes most daemons) use a minimum of three file descriptors: standard input, standard output and standard error. Their respective numbers are 0, 1 and 2. In general, these three descriptors are associated with the terminal from which the process was started, with the input being the keyboard. The aim of redirections and pipes is to redirect these descriptors. The examples in this section will help you better understand this concept.

4. Beware! While this is true for most languages, this may not be true under your own language setting (`locale`). This depends on the **collating order**. On some language configurations, `[a-z]` will match a, A, b, B, (...), z. And we do not even mention the fact that some languages have accentuated characters...

3.4.2. Redirections

Imagine, for example, that you wanted a list of files ending with `.png`⁵ in the `images` directory. This list is very long, so you may want to store it in a file in order to look through it at your leisure. You can enter the following command:

```
$ ls images/*.png 1>file_list
```

This means that the standard output of this command (1) is redirected (>) to the file named `file_list`. The > operator is the output redirection operator. If the redirection file does not exist, it is created, but if it exists, its previous contents are overwritten. However, the default descriptor redirected by this operator is the standard output and does not need to be specified on the command line. So you can write more simply:

```
$ ls images/*.png >file_list
```

and the result will be exactly the same. Then you could look at the file using a text file viewer such as `less`.

Now, imagine you want to know how many of these files exist. Instead of counting them by hand, you can use the utility called `wc` (*Word Count*) with the `-l` option, which writes on the standard output the number of lines in the file. One solution is as follows:

```
wc -l 0<file_list
```

and this gives the desired result. The < operator is the input redirection operator, and the default redirected descriptor is the standard input one, i.e. 0, and you simply need to write the line:

```
wc -l <file_list
```

Now suppose you want to remove all the file “extensions” and put the result in another file. One tool for doing this is `sed` (*Stream Editor*). You simply redirect the standard input of `sed` to the `file_list` file and redirect its output to the result file, i.e. `the_list`:

```
sed -e 's/\.png$//g' <file_list >the_list
```

and your list is created, ready for you to view at your leisure with any viewer.

It can also be useful to redirect standard errors. For example, you want to know which directories in `/shared` you cannot access: one solution is to list this directory recursively and to redirect the errors to a file, while not displaying the standard output:

```
ls -R /shared >/dev/null 2>errors
```

which means that the standard output will be redirected (>) to `/dev/null`, a special file in which everything you write is discarded (i.e. the standard output is not displayed) and the standard error channel (2) is redirected (>) to the `errors` file.

3.4.3. Pipes

Pipes are in some way a combination of input and output redirections. The principle is that of a physical pipe, hence the name: one process sends data into one end of the pipe and another process reads the data at the other end. The pipe operator is `|`. Let us go back to the file list example above. Suppose you want to find out directly how many corresponding files there are without having to store the list in a temporary file, you would then use the following command:

```
ls images/*.png | wc -l
```

which means that the standard output of the `ls` command (i.e. the list of files) is redirected to the standard input of the `wc` command. This then gives you the desired result.

You can also directly put together a list of files “without extensions” using the following command:

```
ls images/*.png | sed -e 's/\.png$//g' >the_list
```

5. You might think it is crazy to say “files ending with `.png`” rather than “PNG images”. However, once again, files under *UNIX* only have an extension by convention: extensions in no way define a file type. A file ending with `.png` could perfectly well be a JPEG image, an application file, a text file or any other type of file. The same is true under *Windows* as well!

or, if you want to consult the list directly without storing it in a file:

```
ls images/*.png | sed -e 's/\.png$/g' | less
```

Pipes and redirections are not restricted solely to text which can be read by human beings. For example, the following command sent from a *Terminal*:

```
xwd -root | convert - ~/my_desktop.png
```

will send a screenshot of your desktop to the `my_desktop.png`⁶ file in your personal directory.

3.5. Command-Line Completion

Completion is a very handy function, and all modern *shells* (including *bash*) have it. Its role is to give the user as little work to do as possible. The best way to illustrate completion is to give an example.

3.5.1. Example

Suppose your personal directory contains the `file_with_very_long_name_impossible_to_type` file, and you want to look at it. Suppose you also have, in the same directory, another file called `file_text`. You are in your personal directory, so type the following sequence:

```
$ less fi<TAB>
```

(i.e., type `less fi` and then press the TAB key). The *shell* will then expand the command line for you:

```
$ less file_
```

and also give the list of possible choices (in its default configuration, which can be customized). Then type the following key sequence:

```
less file_w<TAB>
```

and the *shell* will extend the command line to give you the result you want:

```
less file_with_very_long_name_impossible_to_type
```

All you need to do then is press the Enter key to confirm and read the file.

3.5.2. Other Completion Methods

The TAB key is not the only way to activate completion, although it is the most common one. As a general rule, the word to be completed will be a command name for the first word of the command line (`ns1<TAB>` will give `nslookup`), and a file name for all the others, unless the word is preceded by a “magic” character like `~`, `@` or `$`, in which case the *shell* will try to complete a user name, a machine name or an environment variable name respectively⁷. There is also a magic character for completing a file name (`/`) and a command to recall a command from the history (`!`).

The other two ways to activate completion are the sequences `Esc-<x>` and `Ctrl+x <x>`, where `<x>` is one of the magic characters already mentioned. `Esc-<x>` will attempt to come up with a unique completion. If it fails, it will complete the word with the largest possible substring in the choice list. A *beep* means either that the choice is not unique, or simply that there is no corresponding choice. The sequence `Ctrl+x <x>` displays the list of possible choices without attempting any completion. Pressing the TAB key is the same as successively pressing `Esc-<x>` and `Ctrl+x <x>`, where the magic character depends on the context.

Thus, one way to see all the environment variables defined is to type the sequence `Ctrl+x $` on a blank line. Another example: if you want to see the *man* page for the `nslookup` command, you simply type `man ns1` then `Esc-!`, and the shell will automatically complete the command to `man nslookup`.

6. Yes, it will indeed be a PNG image (however, the *ImageMagick* package needs to be installed...).

7. Remember: *UNIX* differentiates between uppercase and lowercase. The `HOME` environment variable and the `home` variable are not the same.

3.6. Starting and Handling Background Processes: Job Control

You have probably noticed that when you enter a command from a *Terminal*, you normally have to wait for the command to finish before the *shell* returns control to you. This means that you have sent the command in the *foreground*. However, there are occasions when this is not desirable.

Suppose, for example, that you decide to copy a large directory recursively to another. You have also decided to ignore errors, so you redirect the error channel to `/dev/null`:

```
cp -R images/ /shared/ 2>/dev/null
```

Such a command can take several minutes until it is fully executed. You then have two solutions: the first one is violent, and means stopping (killing) the command and then doing it again when you have the time. To do this, type `Ctrl+c`: this will terminate the process and take you back to the prompt. But wait, don't do it yet! Read on.

Suppose you want the command to run while you do something else. The solution is then to put the process into the *background*. To do this, type `Ctrl+z` to suspend the process:

```
$ cp -R images/ /shared/ 2>/dev/null
# Type C-z here
[1]+  Stopped                  cp -R images/ /shared/ 2>/dev/null
$
```

and there you are again at the prompt. The process is then on standby, waiting for you to restart it (as shown by the `Stopped` keyword). That, of course, is what you want to do, but in the background. Type `bg` (for *Back-Ground*) to get the desired result:

```
$ bg
[1]+ cp -R images/ /shared/ 2>/dev/null &
$
```

The process will then start running again as a background task, as indicated by the `&` (ampersand) sign at the end of the line. You will then be back at the prompt and able to continue working. A process which runs as a background task, or in the background, is called a background *job*.

Of course, you can start processes directly as background tasks by adding an `&` character at the end of the command. For example, you can start the command to copy the directory in the background by writing:

```
cp -R images/ /shared/ 2>/dev/null &
```

If you want, you can also restore this process to the foreground and wait for it to finish by typing `fg` (*ForeGround*). To put it into the background again, type the sequence `Ctrl+z`, `bg`.

You can start several jobs this way: each command will then be given a job number. The *shell* command `jobs` lists all the jobs associated with the current *shell*. The job preceded by a `+` sign indicates the last process begun as a background task. To restore a particular job to the foreground, you can then type `fg <n>` where `<n>` is the job number, i.e. `fg 5`.

Note that you can also suspend or start *full-screen* applications this way, such as `less` or a text editor like `Vi`, and restore them to the foreground when you want.

3.7. A Final Word

As you can see, the *shell* is very comprehensive and using it effectively is a matter of practice. In this relatively long chapter, we have only mentioned a few of the available commands: **Mandrake Linux** has thousands of utilities, and even the most experienced users do not make use of them all.

There are utilities for all tastes and purposes: you have utilities for handling images (like `convert` mentioned above, but also *GIMP batch* mode and all *pixmap* handling utilities), sound (Ogg Vorbis encoders, audio CD players), CD writing, *e-mail* clients, FTP clients and even web browsers (like `lynx` or `links`), not to mention all the administration tools.

Even if graphical applications with equivalent functions do exist, they are usually graphical interfaces built around these very same utilities. In addition, command-line utilities have the advantage of being able to operate in non-interactive mode: you can start writing a CD and then log off the system with the confidence that the writing will take place (see the `nohup(1) man` page or the `screen(1) man` page).

Chapter 4. Text Editing: Emacs and VI

As stated in the introduction, text editing¹ is a fundamental feature when using a *UNIX* system. The two editors we are going to take a quick look at are a little difficult to use initially, but once you understand the basics, each can prove to be a powerful tool.

4.1. Emacs

Emacs is probably the most powerful text editor in existence. It can do absolutely everything and is infinitely extensible thanks to its built-in *lisp*-based programming language. With *Emacs*, you can move around the web, read your mail, take part in Usenet newsgroups, make coffee, and so on. This isn't to say that you'll learn how to do all of that in this chapter, but you'll get a good start with opening *Emacs*, editing one or more files, saving them and quitting *Emacs*.

4.1.1. Short presentation

Invoking *Emacs* is relatively simple:

```
emacs [file] [file...]
```

Emacs will open every file entered as an argument into a buffer, with a maximum of two buffers visible at the same time. If you started *Emacs* without specifying any files on the command line you will be placed into a buffer called **scratch**. If you are in *X*, you will have menus available, but in this chapter we will concentrate on working strictly with the keyboard.

4.1.2. Getting started

It is time to get some hands-on experience. For our example, let's start by opening two files, *file1* and *file2*. If these files do not exist, they will be created as soon as you write something in them:

```
$ emacs file1 file2
```

You will get the window shown in figure 4-1.

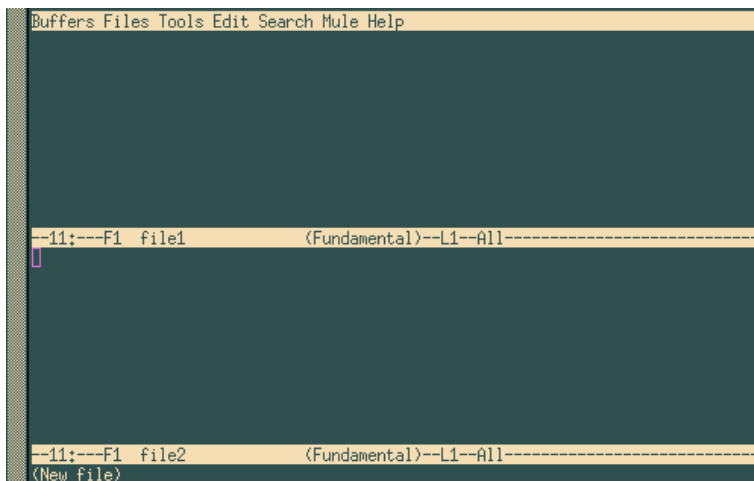


Figure 4-1. Emacs, editing two files at once

As you can see, two buffers have been created: one per file. A third is also present at the bottom of the screen (where you see *(New file)*); this is the mini-buffer. You cannot force yourself into this buffer; you must be invited by *Emacs* during interactive entries. To change the current buffer, type *Ctrl+x o*. You type text just as in a "normal" editor, deleting characters with the *DEL* or Backspace key.

1. "To edit text" means to modify the contents of a file holding only letters, digits, and punctuation signs; such files can be electronic mail messages, source code, documents, or even configuration files.

To move around, you can use the arrow keys, or you could use the following key combinations: `Ctrl+a` to go to the beginning of the line, `Ctrl+e` to go to the end of the line, `Alt+<` to go to the beginning of the buffer and `Alt+>` to go to the end of the buffer. There are many other combinations, even ones for each of the arrow keys².

Once you're ready to save your changes to disk, type `Ctrl+x Ctrl+s`, or if you want to save the contents of the buffer to another file, type `Ctrl+x Ctrl+w`. *Emacs* will ask you for the name of the file that the contents of the buffer should be written to. You can use *completion* to do this.

4.1.3. Handling buffers

If you want, you can switch to displaying a single buffer on the screen. There are two ways of doing this:

- If you're in the buffer that you want to hide: type `Ctrl+x 0`
- If you're in the buffer which you want to keep on the screen: type `Ctrl+x 1`.

There are two ways of restoring a buffer back to the screen:

- type `Ctrl+x b` and enter the name of the buffer you want, or
- type `Ctrl+x Ctrl+b`. This will open a new buffer called `*Buffer List*`. You can move around this buffer using the sequence `Ctrl+x o`, then select the buffer you want and press the Enter key, or else type the name of the buffer in the mini-buffer. The buffer `*Buffer List*` returns to the background once you have made your choice.

If you have finished with a file and want to get rid of the associated buffer, type `Ctrl+x k`. *Emacs* will then ask you which buffer it should close. By default, it is the name of the buffer you are currently in. If you want to get rid of a buffer other than the one suggested, enter its name directly or press TAB: *Emacs* will open yet another buffer called `*Completions*` giving the list of possible choices. Confirm the choice with the Enter key.

You can also restore two visible buffers to the screen at any time. To do this type `Ctrl+x 2`. By default, the new buffer created will be a copy of the current buffer (which enables you, for example, to edit a large file in several places "at the same time"). To move between buffers, use the commands that were previously described.

You can open other files at any time, using `Ctrl+x Ctrl+f`. *Emacs* will prompt you for the filename and you can again use completion if you find it more convenient.

4.1.4. Copy, cut, paste, search

Suppose you find yourself in the following situation: figure 4-2.

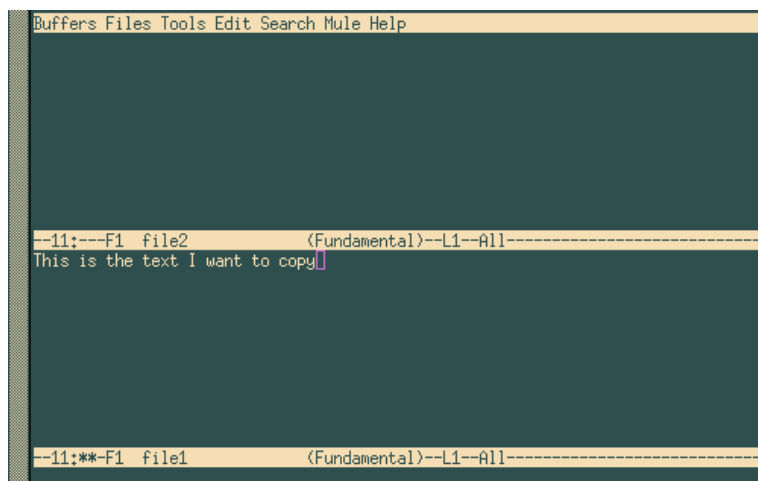


Figure 4-2. Emacs, before copying the text block

² *Emacs* has been designed to work on a great variety of machines, some of which don't have arrow keys on their keyboards. This is even more true of *Vi*.

First off, you'll need to select the text that you want to copy. In *X*, you can highlight the text using the mouse, but we will focus on the text-based keyboard interface. In this example we want to copy the entire sentence. The first step is to place a mark at beginning of the area. Assuming the cursor is in the position where it is in the figure above, the command sequence would be `Ctrl+ SPACE` (Control + space bar). *Emacs* will display the message `Mark set` in the mini-buffer. Next, move to the beginning of the line with `Ctrl+a`. The area selected for copying or cutting is the entire area located between the mark and the cursor's current position, so in this case it will be the entire line of text. There are two command sequences available—`Alt+w` (to copy) or `Ctrl+w` (to cut). If you copy, *Emacs* will briefly return to the mark position so that you can view the selected area.

Finally, go to the buffer where you want the text to end up and type `Ctrl+y`. This will give you the result displayed in figure 4-3.

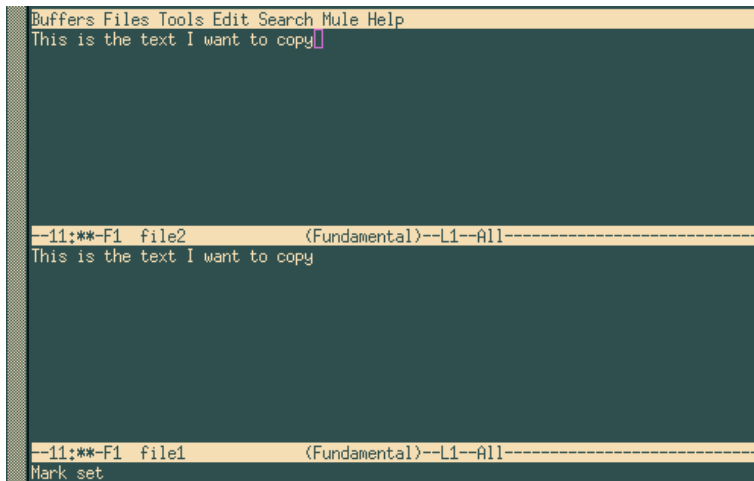


Figure 4-3. Emacs, after having copied the text block

In fact, what you have done is copied text to the “kill ring” of *Emacs*. This kill ring contains all the areas copied or cut since *Emacs* was started. **Any** area just copied or cut is placed at the top of the kill ring. The sequence `Ctrl+y` only “pastes” the area at the top. If you want to access any of the other areas, press `Ctrl+y` then `Alt+y` until you get to the desired text.

To search for text, go to the desired buffer and type `Ctrl+s`. *Emacs* will ask you what string it should search for. To continue a search with the same string in the current buffer, just type `Ctrl+s` again. When *Emacs* reaches the end of the buffer and finds no more occurrences, you can type `Ctrl+s` again to restart the search from the beginning of the buffer. Pressing the Enter key ends the search.

To search and replace, type `Alt+%`. *Emacs* asks you what string to search for, what to replace it with, and asks for confirmation for each occurrence it finds.

To Undo, type `Ctrl+x u` which will undo the previous operation. You can undo as many operations as you want.

4.1.5. Quit Emacs

The shortcut for this is `Ctrl+x Ctrl+c`. If you haven't saved your changes, *Emacs* will ask whether you want to save your buffers.

4.2. Vi: the ancestor

Vi was the first full-screen editor in existence. *Vi* is one of the main examples used by *UNIX* detractors, but also one of the main arguments of its defenders: while it is complicated to learn, it is also an extremely powerful tool once you get into the habit of using it. With a few keystrokes, a *Vi* user can move mountains, and other than *Emacs*, few text editors can make the same claims.

The version supplied with **Mandrake Linux** is in fact *vim*, for *VI iMproved*, but we will call it *Vi* throughout this chapter.

4.2.1. Insert mode, command mode, ex mode...

To begin using *Vi* we use the same sort of command line as we did with *Emacs*. So let us go back to our two files and type:

```
$ vi file1 file2
```

At this point, you find yourself in front of a window resembling figure 4-4.

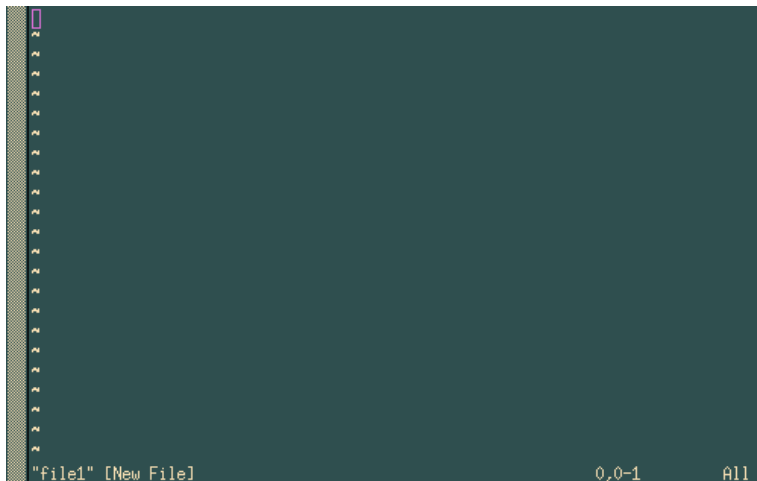


Figure 4-4. Starting position in VIM

You are now in *command mode* in front of the first open file. In command mode, you cannot insert text into a file, so you must switch into *insert mode*.

- **a** and **i**: to insert text after and before the cursor (**A** and **I** insert text at the end and at the beginning of the current line)
- **o** and **O**: to insert text below and above the current line.

In insert mode, you will see the string `--INSERT--` appear at the bottom of the screen (so you know what mode you are in). This is the only mode that will allow you to insert text. To return to command mode, press the `Esc` key.

In insert mode, you can use the Backspace and `DEL` keys to delete text as you go along. The arrow keys will allow you to move around within the text in Command mode and Insert mode. In command mode, there are also other key combinations which we will look at later.

ex mode is accessed by pressing the `:` key in command mode. `:` will appear at the bottom of the screen with the cursor positioned on it. Everything you type up to the Enter you press at the end will be considered by *Vi* to be an *ex* command. If you delete the command and the `:` you typed in, you will return to command mode and the cursor will go back to its original position.

To save changes to a file you type `:w` in command mode. If you want to save the contents of the buffer to another file, type `:w <file_name>`.

4.2.2. Handling buffers

To move, in the same buffer, from among the files whose names were passed on the command line, type `:next` to move to the next file and `:prev` to move to the previous file. You can also use `:e <file_name>`, allowing you either to change to the desired file if this is already open, or to open another file. You may also use completion.

As with *Emacs*, you can have several buffers displayed on the screen. To do this, use the `:split` command.

To change buffers, type `Ctrl+w j` to go to the buffer below or `Ctrl+w k` to go to the buffer above. You can also use the up and down arrow keys instead of **j** or **k**. The `:close` command hides a buffer and the `:q` command closes it.

You should be aware that *Vi* if you try to hide or close a buffer without saving the changes, the command will not be carried out and you will get this message:

No write since last change (use ! to override)

In this case, do as you are told and type :q! or :close!.

4.2.3. Editing text and move commands

Apart from the Backspace and DEL keys in edit mode, *Vi* has many other commands for deleting, copying, pasting, and replacing text in command mode. All the commands shown here are in fact separated into two parts: the action to be performed and its effect. The action may be:

- **c**: to replace (*Change*); the editor deletes the text requested and goes back into insert mode after this command
- **d**: to delete (*Delete*)
- **y**: to copy (*Yank*). We will look at this in the next section.
- **.**: repeats last action.

The effect defines which group of characters the command acts upon. These also effect commands entered as they are in command mode correspond to movements:

- **h, j, k, l**: one character left, down, up, right³
- **e, b, w**: to the end, beginning of the current word and the beginning of the next word
- **^, 0, \$**: to the first non-blank character of the current line, the beginning of the current line, and the end of current line
- **f<x>**: to next occurrence of character <x>. For example, **f e** moves the cursor to the next occurrence of the character **e**
- **/<string>, ?<string>**: to the next and previous occurrence of string or regexp <string>. For example, **/foobar** moves the cursor until the next occurrence of the word **foobar**.
- **{, }**: to the beginning, to the end of current paragraph;
- **G, H**: to end of file, to beginning of screen.

Each of these “effect” characters or move commands can be preceded by a repetition number. For **G**, (“Go”) this references the line number in the file. Based on this information, you can make all sorts of combinations.

Some examples:

- **6b**: moves 6 words backwards
- **c8fk**: delete all text until the eighth occurrence of the character **k** then goes into insert mode
- **91G**: goes to line 91 of the file
- **d3\$**: deletes up to the end of the current line plus the next two lines.

While many of these commands are not very intuitive, the best method to remember the commands is to practice them. But you can see that the expression “move mountains with a few keys” is not much of an exaggeration.

3. A shortcut for **d1** (delete one character forward) is **x**; a shortcut for **dh** is **X**; **dd** deletes the current line.

4.2.4. Cut, copy, paste

Vi has a command that we have already seen for copying text: the **y** command. To cut text, simply use the **d** command. There are 27 memories or buffers for storing text: an anonymous memory and 26 memories named after the 26 lowercase letters of the alphabet.

To use the anonymous memory you enter the command as-is. So the command **y12w** will copy the 12 words after the cursor into anonymous memory⁴. Use **d12w** if you want to cut this area.

To use one of the 26 named memories, enter the sequence "<x>" before the command, where <x> gives the name of the memory. Therefore, to copy the same 12 words into the memory **k**, you would write "**ky12w**", or "**kd12w**" to cut them.

To paste the contents of the anonymous memory, use the commands **p** or **P** (for *Paste*), to insert text after or before the cursor. To paste the contents of a named memory, use "<x>p" or "<x>P" in the same way (for example "**dp**" will paste the contents of memory **d** after the cursor).

Let us look at the example of figure 4-5.

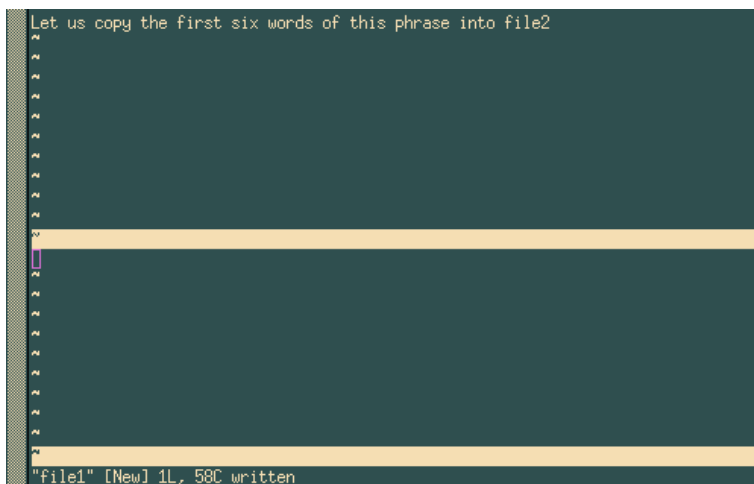


Figure 4-5. VIM, before copying the text block

To carry out this action, we will:

- recopy the first 6 words of the sentence into memory **r** (for example): "**ry6w**"⁵;
- go into the buffer **file2**, which is located below: **Ctrl+w j**;
- paste the contents of memory **r** before the cursor: "**rp**".

We get the expected result, as shown in figure 4-6.

4. But only if the cursor is positioned at the beginning of the first word!

5. **y6w** literally means: "*Yank 6 words*".

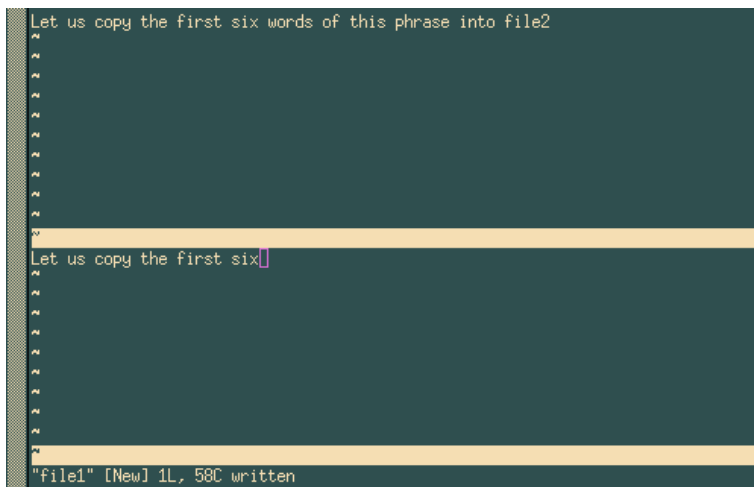


Figure 4-6. VIM, after having copied the text block

Searching for text is very simple: in command mode, you simply type `/` followed by the string to search for, and then press the Enter key. For example, `/party` will search for the string `party` from the current cursor position. Pressing `n` takes you to the next occurrence, and if you reach the end of the file, the search will start again from the beginning. To search backwards, use `?` instead of `/`.

4.2.5. Quit Vi

The command to quit is `:q` (in fact, this command closes the active buffer, as we have already seen, but if it is the only buffer present, you quit *Vi*). There is a shortcut: most of the time you edit only one file. So to quit, you will use:

- `:wq` to save changes and quit (a quicker solution is `ZZ`), or
- `:q!` to quit without saving.

You should have noticed that if you have several buffers, `:wq` will write the active buffer then close it.

4.3. A last word...

Of course, we have said much more here than was necessary (after all, the first aim was to edit a text file), but hopefully we've been able to show you some of the possibilities of each of these editors. There is a great deal more to be said about them, as witnessed by the number of books dedicated to each of these editors.

Take the time to absorb all this information, opt for one of them, or learn only what you think necessary. But at least you know that when you want to go further, you can.

Chapter 5. Command-Line Utilities

The purpose of this chapter is to introduce a small number of command-line tools that may prove useful for everyday use. Of course, you may skip this chapter if you only intend to use a graphical environment, but a quick glance may change your opinion.

Each command will be illustrated by an example, but this chapter is meant as an exercise in order for you to fully grasp their function and use.

5.1. File Operations and Filtering

Most command-line work is done on files. In this section we discuss how to watch and filter file content, take required information from files using a single command, and sort files.

5.1.1. cat, tail, head, tee: File Printing Commands

These commands have almost the same syntax:

```
command_name [option(s)] [file(s)]
```

and can be used in a pipe. All of them are used to print part of a file according to certain criteria.

The `cat` utility concatenates files and prints on the standard output. This is one of the most widely used commands. You can use:

```
# cat /var/log/mail/info
```

to print, for example, the content of a mailer daemon log file to standard output¹. The `cat` command has a very useful option (`-n`) which allows you to print numbers of all output lines.

Some files, like daemon log files (if it is running) are usually huge in size² and printing them completely on the screen is not very useful. Often you need to see only the beginning of file. You can use the `head` command to do so. It prints the first 10 strings by default. So, the command

```
# head /var/log/mail/info
```

will print the first 10 strings of file `/var/log/mail/info`. If you want to display only the first 2 strings you can use the following command:

```
# head -n2 /var/log/mail/info
```

The `tail` command is similar to `head`, but it prints the last strings of a file. This command:

```
# tail /var/log/mail/info
```

prints the last 10 strings of `/var/log/mail/info` (`tail` does it by default). Like with `head` you can print the last 2 strings of this file:

```
# tail -n2 /var/log/mail/info
```

You can also use these commands together. For example, if you wish to display only strings 9 and 10, you can type:

```
# head /var/log/mail/info | tail -n2
```

where the `head` command will select the first 10 strings from a file, pass them through a pipe to the `tail` command and then select the last 2 strings. In the same way you can select from string number 20 to the end of a file:

1. Some examples in this section are based on real work with log files of some servers (services, daemons). Make sure the `syslogd` is running (allows daemon's logging), corresponding daemon (in our case *Postfix*) and you work as root. Anyway you can always apply our examples to other files.

2. For example, the `/var/log/mail/info` file contains info about all sent mails, messages about fetching mail by users with the *POP* protocol, etc.

```
# tail -n20 /var/log/mail/info |head -n1
```

In this example we tell `tail` to select the file's last 20 strings and pass them through a pipe to `head`. Then the `head` command prints the first string from the obtained data.

Let's suppose we want to print the result of the last example and save it to the `results.txt` file. The `tee` utility can help us. Its syntax is:

```
tee [option(s)] [file]
```

Now we can change the previous command this way:

```
# tail -n20 /var/log/mail/info |head -n1|tee results.txt
```

Let's take another example. We want to select the last 20 strings, save them to the `results.txt` file, but print on screen only the first of the 20 selected strings. Then we should type:

```
# tail -n20 /var/log/mail/info |tee results.txt |head -n1
```

The `tee` command possesses a useful option (`-a`) which allows you to append received data to an existent file.

Let's go back to the `tail` command. Files such as logs usually vary dynamically because the daemon constantly adds into the log file actions and events. So, if you want to watch interactively the changes to the log file you can take advantage of one more of `tail`'s useful options: `-f`:

```
# tail -f /var/log/mail/info
```

In this case all changes in the file `/var/log/mail/info` will right be printed on screen immediately. Using the `tail` command with option `-f` is very helpful when you want to know how your system works. For example, looking through the `/var/log/messages` log file, you can keep up with system messages and various daemons.

In the next section we will see how we can use `grep` as a filter to separate *Postfix* messages from messages coming from other services.

5.1.2. `grep`: Locate Strings in Files

Neither the name nor the acronym ("General Regular Expression Parser") is very intuitive, but what it does and its use are simple: `grep` looks for a pattern given as an argument in one or more files. Its syntax is:

```
grep [options] <pattern> [one or more file(s)]
```

If several files are mentioned, their names will precede each matching line displayed in the result. Use the `-h` option to prevent the display of these names; use the `-l` option to get nothing but the matching filenames. The pattern is a regular expression, even though most of the time it consists of a simple word. The most frequently used options are the following:

- `-i`: make a case insensitive search (i.e. ignore differences between lower and uppercase);
- `-v`: invert search. display lines which do **not** match the pattern;
- `-n`: display the line number for each line found;
- `-w`: tells `grep` that the pattern should match a whole word.

So let's go back to analyze the mailer daemon's log file. We want to find all strings in the `/var/log/mail/info` file which contain the "postfix" pattern. Then we type this command:

```
# grep postfix /var/log/mail/info
```

The `grep` command can be used in a pipe. Thus we can get the same result as in the previous example by doing this:

```
# cat /var/log/mail/info | grep postfix
```

If we want to invert conditions and select all strings that do not contain the “postfix” pattern, we use `-v`:

```
# grep -v postfix /var/log/mail/info
```

Let’s suppose we want to find all messages about successfully sent mails. In this case we have to filter all strings which were added into the log file by mailer daemon (contains the “postfix” pattern) and they must contain a message about successful sending (“status=sent”):

```
# grep postfix /var/log/mail/info |grep status=sent
```

In this case `grep` is used twice. It is allowable, but it’s ugly. We can get the same result by using the `fgrep` utility. Now we want to create the `patterns.txt` file (use any name) containing patterns written out in a column. Such a file can be created this way:

```
# echo -e 'status=sent\npostfix' >./patterns.txt
```

Then we call a command where we use the `patterns.txt` file with a list of patterns and the `fgrep` utility instead of the “double calling” of `grep`:

```
# fgrep -f ./patterns.txt /var/log/mail/info
```

File `./patterns.txt` can contain as many patterns as you wish. Each of them has to be typed as a single line. For example, to select messages about successfully sent mails to `peter@mandrakesoft.com`, it will be enough to add this email into our `./patterns.txt` file:

```
# echo 'peter@mandrakesoft.com' >>./patterns.txt
```

and run the above command.

It is clear that you can combine `grep` with `tail` and `head`. If we want to find messages about last but one email sent to `peter@mandrakesoft.com` we type:

```
# fgrep -f ./patterns.txt /var/log/mail/info | tail -n2 | head -n1
```

Here we apply the filter described above and place the result in a pipe for the `tail` and `head` commands. They select last but one value from received data.

5.1.3. wc: Calculation Elements in Files

The `wc` command (*Word Count*) is used to calculate the number of strings and words in files. It is also helpful to count bytes, characters and the length of the longest line. Its syntax:

```
wc [option(s)] [file(s)]
```

The following options are useful:

- `-l`: print the number of new lines;
- `-w`: print the number of words;
- `-m`: print the character total;
- `-c`: print the number of bytes;
- `-L`: print the length of the longest line in the obtained text.

The `wc` command prints the number of newlines, words and characters by default. Here some usage examples:

If we want to find the number of users in our system, we can type:

```
$wc -l /etc/passwd
```

If we want to know the number of CPU’s in our system, we write:

```
$grep "model name" /proc/cpuinfo |wc -l
```

In the previous section we obtained a list of messages about successfully sent mails to e-mail addresses listed in our `./patterns.txt` file. If we want to know the number of such messages, we can redirect our filter's results in a pipe for the `wc` command:

```
# fgrep -f ./patterns.txt /var/log/mail/info | wc -l
```

and then we will get the desired result.

5.1.4. sort: Sorting Files

Here is the syntax of this powerful sorting utility³:

```
sort [option(s)] [file(s)]
```

Let's consider sorting on part of the `/etc/passwd` file. As you can see:

```
$ cat /etc/passwd
```

the `/etc/passwd` file is not sorted. We want to sort it by `login` field. Then we type:

```
$ sort /etc/passwd
```

The `sort` command sorts data ascending starting by the first field (in our case, the `login` field) by default. If we want to sort data descending, we use option `-r`:

```
$ sort -r /etc/passwd
```

Every user has his own UID written in the `/etc/passwd` file. Let's sort a file ascending with the UID field:

```
$ sort /etc/passwd -t":" -k3 -n
```

Here we use the following `sort`'s options:

- `-t":`: tells `sort` that the field separator is the `":"` symbol;
- `-k3`: means that sorting must be done by third column;
- `-n`: says that the sort is to occur on numerical data, not alphabetical.

The same can be done reversely:

```
$ sort /etc/passwd -t":" -k3 -n -r
```

Note that `sort` has two important options:

- `-u`: perform a strict ordering: duplicate sort fields are discarded;
- `-f`: ignore case (treat lowercase as uppercase characters).

Finally, if we want to find the user with the highest UID we can use such command:

```
$ sort /etc/passwd -t":" -k3 -n |tail -n1
```

where we sort the `/etc/passwd` file in ascending according to the UID column, and redirect the result through a pipe to the `tail` command which will print out the first value of the sorted list.

3. We discuss `sort` briefly here because whole books can be written about its features.

5.2. find: Find Files According to Certain Criteria

`find` is a long-standing *UNIX* utility. Its role is to recursively scan one or more directories and find files which match a certain set of criteria in those directories. Even though it is very useful, the syntax is truly obscure, and using it requires a little work. The general syntax is:

```
find [options] [directories] [criterion] [action]
```

If you do not specify any directory, `find` will search the current directory. If you do not specify criteria, this is equivalent to “true”, thus all files will be found. The options, criteria and actions are so numerous that we will only mention a few of each here. Let’s start with options:

- `-xdev`: do not search on directories located on other file systems
- `-mindepth <n>`: descend at least `<n>` levels below the specified directory before searching for files
- `-maxdepth <n>`: search for files which are located at most `n` levels below the specified directory
- `-follow`: follow symbolic links if they link to directories. By default, `find` does not follow them
- `-daystart`: when using tests related to time (see below), take the beginning of current day as a timestamp instead of the default (24 hours before current time).

A criteria can be one or more of several *atomic* tests. Some useful tests are:

- `-type <type>`: search for a given type of file. `<type>` can be one of: `f` (regular file), `d` (directory), `l` (symbolic link), `s` (socket), `b` (block mode file), `c` (character mode file) or `p` (named pipe).
- `-name <pattern>`: find files whose names match the given `<pattern>`. With this option, `<pattern>` is treated as a *shell globbing* pattern (see chapter *Shell Globbing Patterns*, page 16);
- `-iname <pattern>`: like `-name`, but ignore case
- `-atime <n>`, `-amin <n>`: find files that have last been accessed `<n>` days ago (`-atime`) or `<n>` minutes ago (`-amin`). You can also specify `+<n>` or `-<n>`, in which case the search will be done for files accessed at most or at least `<n>` days/minutes ago;
- `-anewer <file>`: find files which have been accessed more recently than file `<file>`
- `-ctime <n>`, `-cmin <n>`, `-cnewer <file>`: same as for `-atime`, `-amin` and `-anewer`, but applies to the last time when the contents of the file have been modified
- `-regex <pattern>`: same as `-name`, but pattern is treated as a *regular expression*
- `-iregex <pattern>`: same as `-regex`, but ignore case.

There are many other tests, refer to `find(1)` for more details. To combine tests, you can use one of:

- `<c1> -a <c2>`: true if both `<c1>` and `<c2>` are true; `-a` is implicit, therefore you can type `<c1> <c2> <c3> ...` if you want all tests `<c1>`, `<c2>`, ... to match
- `<c1> -o <c2>`: true if either `<c1>` or `<c2>` are true, or both. Note that `-o` has a lower *precedence* than `-a`, therefore if you want to match files which match criteria `<c1>` or `<c2>` and match criterion `<c3>`, you will have to use parentheses and write `( <c1> -o <c2> ) -a <c3>`. You must *escape* (deactivate) parentheses, as otherwise they will be interpreted by the *shell*!
- `-not <c1>`: inverts test `<c1>`, therefore `-not <c1>` is true if `<c1>` is false.

Finally, you can specify an action for each file found. The most frequently used are:

- `-print`: just prints the name of each file on standard output. This is the default action.
- `-ls`: prints on the standard output the equivalent of `ls -l` for each file found.
- `-exec <command>`: execute command `<command>` on each file found. The command line `<command>` must end with a `;`, which you must escape so that the shell does not interpret it; the file position is marked with `{}`. See the usage examples.
- `-ok <command>`: same as `-exec` but ask confirmation for each command.

The best way to consolidate all of the options and parameters is with some examples. Let’s say you want to find all directories in the `/usr/share` directory. You would type:

```
find /usr/share -type d
```

Suppose you have an HTTP server, all your HTML files are in `/var/www/html`, which is also your current directory. You want to find all files whose contents have not been modified for a month. Because you have pages from several writers, some files have the `html` extension and some have the `htm` extension. You want to link these files in directory `/var/www/obsolete`. You would type⁴:

```
find \( -name "*.htm" -o -name "*.html" \) -a -ctime -30 \
-exec ln {} /var/www/obsolete \;
```

This is a fairly complex example, and requires a little explanation. The criterion is this:

```
\( -name "*.htm" -o -name "*.html" \) -a -ctime -30
```

which does what we want: it finds all files whose names end either in `.htm` or `.html` “`\( -name "*.htm" -o -name "*.html" \)`”, and (`-a`) which have not been modified in the last 30 days, which is roughly a month (`-ctime -30`). Note the parentheses: they are necessary here, because `-a` has a higher precedence. If there weren’t any, all files ending with `.htm` would have been found, plus all files ending with `.html` and which haven’t been modified for a month, which is not what we want. Also note that parentheses are escaped from the shell: if we had put `( .. )` instead of `\( .. \)`, the shell would have interpreted them and tried to execute `-name "*.htm" -o -name "*.html"` in a sub-shell... Another solution would have been to put parentheses between double quotes or single quotes, but a backslash here is preferable as we only have to isolate one character.

And finally, there is the command to be executed for each file:

```
-exec ln {} /home/httpd/obsolete \;
```

Here too, you have to escape the `;` from the *shell*, because otherwise the shell interprets it as a command separator. If you happen to forget, `find` will complain that `-exec` is missing an argument.

A last example: you have a huge directory (`/shared/images`) holding all kinds of images. Regularly, you use the `touch` command to update the times of a file named `stamp` in this directory, so that you have a time reference. You want to find all *JPEG* images in it which are newer than the `stamp` file, but because you got the images from various sources, these files have extensions `jpg`, `jpeg`, `JPG` or `JPEG`. You also want to avoid searching in the old directory. You want this file list to be mailed to you, and your user name is `peter`:

```
find /shared/images -cnewer      \
    /shared/images/stamp        \
    -a -iregex ".*\.jpe?g"      \
    -a -not -regex ".*old/.*" \
    | mail peter -s "New images"
```

Of course, this command is not very useful if you have to type it each time, and you would like it to be executed regularly. A simple way to have the command run periodically is:

4. Note that this example requires that `/var/www` and `/var/www/obsolete` be on the same file system!

5.3. Commands Startup Sheduling

5.3.1. crontab: reporting or editing your crontab file

`crontab` is a command which allows you to execute commands at regular time intervals, with the added bonus that you don't have to be logged in. `crontab` will have the output of your command mailed to you. You can specify the intervals in minutes, hours, days, and even months. Depending on the options, `crontab` will act differently:

- `-l`: Print your current crontab file.
- `-e`: Edit your crontab file.
- `-r`: Remove your current crontab file.
- `-u <user>`: Apply one of the above options for user `<user>`. Only root can do this.

Let's start by editing a crontab. If you type `crontab -e`, you will be in front of your favorite text editor if you have set the `EDITOR` or `VISUAL` environment variable, otherwise `Vi` will be used. A line in a crontab file is made of six fields. The first five fields are time intervals for minutes, hours, days in the month, months and days in the week. The sixth field is the command to be executed. Lines beginning with a `#` are considered to be comments and will be ignored by `crond` (the program which is responsible for executing crontab files). Here is an example of crontab:



in order to print this out in a readable font, we had to break up long lines. Therefore, some chunks must be typed on a single line. When the `\` character ends a line, this means this line is to be continued. This convention works in Makefile files and in the *shell* as well as in other contexts.

```
# If you don't want to be sent mail, just comment
# out the following line
#MAILTO=""
#
# Report every 2 days about new images at 2 pm,
# from the example above - after that, "retouch"
# the "stamp" file. The "%" is treated as a
# newline, this allows you to put several
# commands in a same line.
0 14 */2 * * find /shared/images          \
-cnewer /shared/images/stamp              \
-a -iregex ".*\.jpe?g"                    \
-a -not -regex                            \
    ".*old/.*"%touch /shared/images/stamp
#
# Every Christmas, play a melody :)
0 0 25 12 * mpg123 $HOME/sounds/merryxmas.mp3
#
# Every Tuesday at 5pm, print the shopping list...
0 17 * * 2 lpr $HOME/shopping-list.txt
```

There are several ways to specify intervals other than the ones shown in this example. For example, you can specify a set of *discrete values* separated by commas (1,14,23) or a range (1-15), or even combine both of them (1-10,12-20), optionally with a step (1-12,20-27/2). Now it's up to you to find useful commands to put in it!

5.3.2. at: schedule a command, but only once

You may also want to launch a command at a given day, but not regularly. For example, you want to be reminded of an appointment, today at 6pm. You run *X*, and you'd like to be notified at 5:30pm, for example, that you must go. *at* is what you want here:

```
$ at 5:30pm
# You're now in front of the "at" prompt
at> xmessage "Time to go now! Appointment at 6pm"
# Type CTRL-d to exit
at> <EOT>
$
```

You can specify the time in different manners:

- **now +<interval>**: Means, well, now, plus an interval (optionally. No interval specified means just now). The syntax for the interval is **<n>** (minutes | hours | days | weeks | months). For example, you can specify **now + 1 hour** (an hour from now), **now + 3 days** (three days from now) and so on.
- **<time> <day>**: Fully specify the date. The **<time>** parameter is mandatory. *at* is very liberal in what it accepts: you can for example type 0100, 04:20, 2am, 0530pm, 1800, or one of three special values: noon, teatime (4pm) or midnight. The **<day>** parameter is optional. You can specify it in different manners as well: 12/20/2001 for example, which stands for December 20th, 2001, or, the European way, 20.12.2001. You may omit the year, but then only the European notation is accepted: 20.12. You can also specify the month in full letters: Dec 20 or 20 Dec are both valid.

at also accepts different options:

- **-l**: Prints the list of currently queued jobs; the first field is the job number. This is equivalent to the *atq* command.
- **-d <n>**: Remove job number **<n>** from the queue. You can obtain job numbers from *atq*. This is equivalent to *atrm <n>*.

As usual, see the *at(1)* manpage for more options.

5.4. Archiving and Data Compression

5.4.1. tar: Tape ARchiver

Although we have already seen a use for *tar* in the “*Building and Installing Free Software*”, page 65 chapter, we haven't explained how it works, which we will do in this section. Just like *find*, *tar* is a long standing *UNIX* utility, so its syntax is a bit special. The syntax is:

```
tar [options] [files...]
```

Here is a list of some options. Note that all of them have an equivalent long option, but you will have to refer to the manual page for this as they won't be listed here.



the initial dash (-) of short options is now deprecated with *tar*, except after a long option.

- **c**: this option is used in order to create new archives
- **x**: this option is used in order to extract files from an existing archive
- **t**: list files from an existing archive
- **v**: list the files which are added to an archive or extracted from an archive, or, in conjunction with the **t** option (see above), it outputs a long listing of files instead of a short one

- **f** <file>: create archive with name <file>, extract from archive <file> or list files from archive <file>. If this parameter is omitted, the default file will be /dev/rmt0, which is generally the special file associated with a *streamer*. If the file parameter is - (a dash), the input or output (depending on whether you create an archive or extract from one) will be associated to the standard input or standard output
- **z**: tells tar that the archive to create should be compressed with gzip, or that the archive to extract from is compressed with gzip
- **j**: same as z, but the program used for compression is bzip2
- **p**: when extracting files from an archive, preserve all file attributes, including ownership, last access time and so on. Very useful for file system dumps.
- **r**: append the list of files given on the command line to an existing archive. Note that the archive to which you want to append files should **not** be compressed!
- **A**: append archives given on the command line to the one submitted with the **f** option. Similar to **r**, the archives should not be compressed in order for this to work.

There are many, many, many other options, so you may want to refer to the tar(1) manual page for the entire list. See, for example, the **d** option. Let's proceed with an example. Say you want to create an archive of all images in /shared/images, compressed with bzip2, named images.tar.bz2 and located in your home directory. You will then type:

```
#
# Note: you must be in the directory from which
#   you want to archive files!
#
$ cd /shared
$ tar cjf ~/images.tar.bz2 images/
```

As you can see, we used three options here: **c** told tar we wanted to create an archive, **j** to compress it with bzip2, and **f** ~/images.tar.bz2 that the archive was to be created in our home directory, and its name will be images.tar.bz2. We may want to check if the archive is valid now. We can do this by listing its files:

```
#
# Get back to our home directory
#
$ cd
$ tar tjvf images.tar.bz2
```

Here, we told tar to list (**t**) files from archive images.tar.bz2 (**f** images.tar.bz2), warned that this archive was compressed with bzip2 (**j**), and that we wanted a long listing (**v**). Now, say you have erased the images directory. Fortunately, your archive is intact, and you now want to extract it back to its original place, in /shared. But as you don't want to break your find command for new images, you need to preserve all file attributes:

```
#
# cd to the directory where you want to extract
#
$ cd /shared
$ tar jxpf ~/images.tar.bz2
```

And here you are!

Now, let's say you want to extract the directory images/cars from the archive, and nothing else. Then you can type this:

```
$ tar jxf ~/images.tar.bz2 images/cars
```

If you try to back up special files, `tar` will take them as what they are, special files, and will not dump their contents. So yes, you can safely put `/dev/mem` in an archive. It also deals correctly with links, so do not worry about this either. For symbolic links, also look at the `h` option in the manpage.

5.4.2. bzip2 and gzip: Data Compression Programs

You can see that we already have talked of these two programs when dealing with `tar`. Unlike `winzip` under *Windows*, archiving and compressing are done using two separate utilities — `tar` for archiving, and the two programs which we will now introduce for compressing data: `bzip2` and `gzip`. You might also use a different compression tool, programs like `zip`, `arj` or `rar` also exist for *GNU/Linux* (but they are rarely used).

At first, `bzip2` was written as a replacement for `gzip`. Its compression ratios are generally better, but on the other hand, it requires more RAM while working. The reason why `gzip` is still used is that it is still more widespread than `bzip2`.

Both commands have a similar syntax:

```
gzip [options] [file(s)]
```

If no filename is given, both `gzip` and `bzip2` will wait for data from the standard input and send the result to the standard output. Therefore, you can use both programs in pipes. Both programs also have a set of common options:

- `-1, ..., -9`: set the compression ratio. The higher the number, the better the compression, but better also means slower.
- `-d`: uncompress file(s). This is equivalent to using `gunzip` or `bunzip2`.
- `-c`: dump the result of compression/decompression of files given as parameters to the standard output.



By default, both `gzip` and `bzip2` erase the file(s) that they have compressed (or uncompressed) if you don't use the `-c` option. You can avoid doing this in `bzip2` by using the `-k` option. `gzip` has no equivalent option.

Now some examples. Let's say you want to compress all files ending with `.txt` in the current directory using `bzip2`. You would type:

```
$ bzip2 -9 *.txt
```

Let's say you want to share your image archives with someone, but he doesn't have `bzip2`, only `gzip`. You don't need to uncompress the archive and re-compress it, you can just uncompress to the standard output, use a pipe, compress from standard input and redirect the output to the new archive:

```
bzip2 -dc images.tar.bz2 | gzip -9 >images.tar.gz
```

You could have typed `bzcat` instead of `bzip2 -dc`. There is an equivalent for `gzip` but its name is `zcat`, not `gzcat`. You also have `bzless` for `bzip2` file and `zless` for `gzip` if you want to view compressed files right away without having to uncompress them first. As an exercise, try and find the command you would have to type in order to view compressed files without uncompressing them, and without using `bzless` or `zless`.

5.5. Many, many more...

There are so many commands that a comprehensive book about them would be the size of an encyclopedia. This chapter hasn't even covered a tenth of the subject, yet you can do much with what you learned here. If you wish, you may read some manual pages: `sort(1)`, `sed(1)` and `zip(1)` (yes, that's what you think: you can extract or make `.zip` archives with *GNU/Linux*), `convert(1)`, and so on. The best way to get accustomed to these tools is to practice and experiment with them, and you will probably find a lot of uses for them, even quite unexpected ones. Have fun!

Chapter 6. Process Control

6.1. More About Processes

It is possible to monitor processes and to “ask” them to terminate, to pause, to continue, etc. To understand the operations we are going to perform here, it is helpful to know a bit more about processes.

6.1.1. The Process Tree

As with files, all processes that run on a *GNU/Linux* system are organized in the form of a tree. The root of this tree is *init*. Each process has a number (its PID, *Process ID*), together with the number of its parent process (PPID, *Parent Process ID*). The PID of *init* is 1, and so is its PPID: *init* is its own father.

6.1.2. Signals

Every process in *UNIX* can react to signals sent to it. There are 64 different signals which are identified either by their number (starting from 1) or by their symbolic names (SIGx, where x is the signal’s name). The 32 “higher” signals (33 to 64) are real-time signals and are out of the scope of this chapter. For each of these signals, the process can define its own behavior, except for two signals: signal number 9 (KILL) and number 19 (STOP).

Signal 9 terminates a process irrevocably without giving it the time to terminate properly. This is the signal you send to a process which is stuck or exhibits other problems. A full list of signals is available using the `kill -l` command.

6.2. Information on Processes: `ps` and `pstree`

These two commands display a list of processes currently running on the system, according to criteria set by you.

6.2.1. `ps`

Sending this command without an argument will show only processes initiated by you and attached to the terminal you are using:

```
$ ps
      PID TTY          TIME CMD
  18614 pts/3        00:00:00 bash
  20173 pts/3        00:00:00 ps
```

As with many *UNIX* utilities, `ps` has a handful of options, the most common of which are:

- `a`: also displays processes started by other users;
- `x`: also displays processes with no control terminal or with a control terminal different to the one you are using;
- `u`: displays for each process the name of the user who started it and the time at which it was started.

There are many other options. Refer to the `ps(1)` manual page for more information.

The output of this command is divided into different fields: the one that will interest you the most is the PID field which contains the process identifier. The CMD field contains the name of the executed command. A very common way of invoking `ps` is as follows:

```
$ ps ax | less
```

This gives you a list of all processes currently running so that you can identify one or more processes which are causing problems, and subsequently terminate them.

6.2.2. pstree

The `ps` command displays the processes in the form of a tree structure. One advantage is that you can immediately see which is the parent process of what: when you want to kill a whole series of processes and if they are all parents and children, you can simply kill the parent. You will want to use the option `-p` which displays the PID of each process, and the option `-u` which shows the name of the user who started the process. As the tree structure is generally long, you will want to invoke `ps` in the following way:

```
$ ps -u | less
```

This gives you an overview of the whole process tree structure.

6.3. Sending Signals to Processes: kill, killall and top

6.3.1. kill, killall

These two commands are used to send signals to processes. The `kill` command requires a process number as an argument, while `killall` requires a process name.

Both of these commands can optionally receive the signal number of the signal to be sent as an argument. By default, they both send the signal 15 (TERM) to the relevant process(es). For example, if you want to kill the process with PID 785, you enter the command:

```
$ kill 785
```

If you want to send it signal 19 (STOP), you enter:

```
$ kill -19 785
```

Suppose that you want to kill a process for which you know the command name. Instead of finding the process number using `ps`, you can kill the process by its name:

```
$ killall -9 netscape
```

Whatever happens, you will only kill your own processes (unless you are root) so do not worry about your “neighbor’s” processes with the same name since they will not be affected.

6.3.2. Mixing ps and kill: top

`top` is a program that simultaneously fulfills the functions of `ps` and `kill` and is also used to monitor processes in real-time giving information about CPU and memory usage, running time, etc. as shown in figure 6-1.

```

1:22pm up 23:26, 5 users, load average: 0.01, 0.02, 0.00
50 processes: 47 sleeping, 2 running, 1 zombie, 0 stopped
CPU states: 1.5% user, 1.1% system, 0.0% nice, 97.2% idle
Mem: 128000K av, 124936K used, 3072K free, 40000K shrd, 1912K buff
Swap: 136512K av, 1772K used, 134740K free, 24700K cached

```

PID	USER	PRI	NI	SIZE	RSS	SHARE	STAT	LIB	%CPU	%MEM	TIME	COMMAND
9837	root	15	0	60716	59M	1940	R		0	1.5	47.4	3:10 X
10164	fg	9	0	1060	1060	860	R		0	0.5	0.8	0:00 top
9855	fg	1	0	2192	2192	1564	S		0	0.1	1.7	0:00 xterm
10066	fg	1	0	20592	20M	8312	S		0	0.1	16.0	0:09 ld-linux.so.
10168	fg	19	0	440	440	360	S		0	0.1	0.3	0:00 sleep
1	root	0	0	168	168	92	S		0	0.0	0.1	0:04 init
2	root	0	0	0	0	0	SW		0	0.0	0.0	0:00 kflushd
3	root	0	0	0	0	0	SW		0	0.0	0.0	0:01 kupdate
4	root	0	0	0	0	0	SW		0	0.0	0.0	0:00 kpiod
5	root	0	0	0	0	0	SW		0	0.0	0.0	0:03 kswapd
6	root	-20	-20	0	0	0	SW<		0	0.0	0.0	0:00 mdrecoveryd
133	root	0	0	72	60	0	S		0	0.0	0.0	0:00 apmd
268	bin	0	0	76	52	0	S		0	0.0	0.0	0:00 portmap
320	root	0	0	292	244	168	S		0	0.0	0.1	0:00 syslogd
330	root	0	0	496	164	120	S		0	0.0	0.1	0:00 klogd
345	root	0	0	184	176	80	S		0	0.0	0.1	0:00 crond
360	root	0	0	224	216	124	S		0	0.0	0.1	0:00 inetd

Figure 6-1. Monitoring Processes with top

The program is entirely keyboard controlled. You can access help by pressing **h**. Its most useful commands are the following:

- **k**: this command is used to send a signal to a process. **top** will then ask you for the process' PID followed by the number of the signal to be sent (**TERM** — or **15** — by default);
- **M**: this command is used to sort processes by the amount of memory they take up (field **%MEM**);
- **P**: this command is used to sort processes by the CPU time they take up (field **%CPU**; this is the default sort method);
- **u**: this one is used to display a given user's processes, **top** will ask you which one. You need to enter the user's **name**, not his **UID**. If you do not enter any name, all processes will be displayed;
- **i**: by default, all processes, even sleeping ones, are displayed. This command ensures that only processes currently running are displayed (processes whose **STAT** field states **R**, *Running*) and not the others. Using this command again takes you back to the previous process display situation.

6.4. Setting Priority to Processes: nice, renice

Every process in the system is running with defined priorities (also called “nice value”). This value may vary from -20 to +20. The maximum priority value for processes is -20. If it is not defined, every process will run with priority 0 by default (the “base” scheduling priority). Processes with maximum priority (any negative value up to -20) use more system resources than others. Processes with minimal priority (+20) will work when the system is not used by other tasks. Users other than the super-user may only lower the priority of processes they own within a range of 0 to 20. The super-user (root) may set the priority of any process to any value.

6.4.1. renice

If one or more processes use too much system resource, you can change their priorities instead of killing them. For such tasks the **renice** command can be used. Its syntax is as follows:

```
renice priority [[-p] pid ...] [[-g] pgrp ...] [[-u] user ...]
```

where **priority** is the value of the priority, **pid** (use option **-p** for multiple processes) is the process ID, **pgrp** (introduced by **-g** if various) is the process group ID, and **user** (**-u** for more than one) is the username of the process owner.

Let's suppose you have run a process with PID 785, which makes a long scientific operation, and while it is working you want to play a game. Then you type:

```
$ renice +15 785
```

In this case your process will possibly work a little bit longer. However it will not prevent other important processes using more CPU time.

If you are the system administrator and you see that some user is running too many processes and they use too many system resources, you can change that user's process priority with a single command:

```
# renice +20 -u peter
```

After this, all of peter's processes will have the lowest priority and will not obstruct any other user's processes.

6.4.2. nice

Now that you know that you can change the priority of processes, you may wish to run a command with a defined priority. For this, use the `nice` command.

It must be typed before the command which you want to run. By default `nice` sets a priority of 10. Range goes from -20 (highest priority) to 19 (lowest). Option `-n` is used to set priority value.

For example, you want to create an iso image of a **Mandrake Linux** installation CD-ROM:

```
$ dd if=/dev/cdrom of=~/mdk1.iso
```

However on some systems with a usual IDE CD-ROM, the process of large volume information copying can use too many system resources. In order for this process to not prevent others from working, we can start the copying process with a lowered priority by using this command:

```
$ nice -n 19 dd if=/dev/cdrom of=~/mdk1.iso
```

and continue our common work.

To change a process' priority you also can use the above described `top` utility. Use command `r` within `top`'s interface to change the priority of selected process.

Chapter 7. File Tree Organization

Nowadays, a *UNIX* system is big — very big. This is especially true of *GNU/Linux*: the amount of software available would make for an unmanageable system if there weren't any guidelines for the location of files in the tree.

The acknowledged standard is the FHS (*Filesystem Hierarchy Standard*), which at the time this manual was written was up to version 2.2. The document which describes the standard is available on the Internet in different formats on The Pathname web site (<http://www.pathname.com/fhs/>). This chapter will only provide a brief summary, but it should be enough to teach you which directory is likely to contain (or should have placed into it) a given file.

7.1. Shareable/Unshareable, Static/Variable Data

Data on a *UNIX* system can be classified according to the following criteria: shareable data can be common to several computers in a network, while unshareable cannot. Static data must not be modified in normal use, while variable data can. As we explore the tree structure, we will classify the different directories into each of these categories.

Note that these classifications are only recommended. It is not mandatory to follow them, but adopting these guidelines will greatly help you manage your system. Also, keep in mind that the static/variable distinction only applies to general system usage, not its configuration. If you install a program, you will obviously have to modify “normally” static directories, i.e.: `/usr`.

7.2. The root Directory: /

The root directory contains the entire system hierarchy. It cannot be classified since its subdirectories may or may not be static or shareable. Here is a list of the main directories and subdirectories, with their classifications:

- `/bin`: essential binary files. This directory contains the basic commands which will be used by all users and are necessary for the operation of the system: `ls`, `cp`, `login`, etc. Static, unshareable.
- `/boot`: contains the files required by the *GNU/Linux* bootloader (*grub* or *LILO* for **Intel**, *yaboot* for PPC, etc). It may or may not contain the kernel, but if the kernel isn't located in this directory it must be in the root directory. Static, unshareable.
- `/dev`: system device files (*dev* for *DEVICES*). Static, unshareable.
- `/etc`: this directory contains all configuration files specific to the computer. Static, unshareable.
- `/home`: contains all the personal directories of the system's users. This directory may or may not be shareable (some large networks make it shareable via NFS). Variable, shareable.
- `/lib`: this directory contains libraries which are essential to the system; it also stores kernel modules in `/lib/modules`. All libraries required by the binaries in the `/bin` and `/sbin` directories must be located here, together with the `ld.so` linker. Static, unshareable.
- `/mnt`: directory containing the mount points for temporary file systems. Variable, unshareable.
- `/opt`: holds packages not required for system operation. It is recommended that static files (binaries, libraries, manual pages, etc.) be placed in `/opt/package_name` and the specific configuration files in `/etc/opt`.
- `/root`: home directory for root. Variable, unshareable.
- `/usr`: see next section. Static, shareable.
- `/sbin`: contains system binaries essential for system start-up. Most files can only be executed by root. A normal user may run them, but most won't do anything for a regular user. Static, unshareable.
- `/tmp`: directory intended to contain temporary files which certain programs may create. Variable, unshareable;
- `/var`: location for data that may be modified in real time by programs (i.e.: e- mail servers, audit programs, print servers, etc.). All of the `/var` directory is variable, but the various subdirectories may be shareable or unshareable.

7.3. /usr: The Big One

The /usr directory is the main application-storage directory. The binary files in this directory are not required for system start-up or maintenance, because the /usr hierarchy is often located on a separate file system. Because of its (usually) large size, /usr has its own hierarchy of subdirectories. We will mention just a few:

- /usr/X11R6: the entire *X Window System* hierarchy. All binaries required for the operation of *X* (including the *X* servers) and all necessary libraries must be located here. The /usr/X11R6/lib/X11 directory contains all aspects of *X*'s configuration which do not vary from one computer to another. Specific configurations for each computer should go in /etc/X11
- /usr/bin: holds the large majority of the system's binaries. **Any** binary program which is not necessary to the maintenance of the system and is not a system administration program must be located in this directory. The only exception is for programs you install yourself, which must be located in /usr/local
- /usr/lib: contains all the necessary libraries to run programs located in /usr/bin and /usr/sbin. There is also a /usr/lib/X11 symbolic link pointing to the directory which holds the *X Window System* libraries, /usr/X11R6/lib (only if *X* is installed)
- /usr/local: this is where you should install your personal applications. The installation program will create the necessary hierarchy: lib/, bin/, etc.
- /usr/share: this directory contains all architecture-independent data required by applications in /usr. Among other things, you will find zone and location information (zoneinfo and locale).

Let's also mention the /usr/share/doc and /usr/share/man directories, which respectively contain application documentation and the system's manual pages.

7.4. /var: Modifiable Data During Use

The /var directory contains all operating data for programs running on the system. Unlike the working data in /tmp, this data must be kept intact in the event of a reboot. There are many subdirectories, and some are very useful:

- /var/log: contains the system log files
- /var/spool: holds the system daemons' working files. For example, /var/spool/cups contains the print server's working files while /var/spool/mail holds the e-mail server's working files (i.e.: all mail arriving on and leaving your system).
- /var/run: used to keep track of all processes utilized by the system, enabling you to act on them in the event of a system change *runlevel* (see chapter "*The Start-Up Files: init sysv*", page 63).

7.5. /etc: Configuration Files

/etc is one of *UNIX* systems' most essential directories because it holds all the basic system configuration files. **Never** delete it to save space! Likewise, if you want to extend your tree structure over several partitions, remember that /etc must not be put on a separate partition: it is needed for system initialization and must be on the root partition at boot time.

Here are some important files:

- passwd and shadow: these are text files which contain all system users and their encrypted passwords. You will only see shadow if you use shadow passwords, but this is the default installation option.
- inittab: this is the configuration file for init, which as we will see later on, plays a fundamental role in starting up the system.
- services: this file contains a list of existing network services.
- profile: this is the *shell* configuration file, although certain *shells* use other files. For example, *bash* uses bashrc.
- crontab: cron's configuration file, the program responsible for periodic execution of commands.

Certain subdirectories exist for programs which require a large number of configuration files. This applies to the *X Window System*, for example, which stores all its files in the `/etc/X11` directory.

Chapter 8. Filesystems and Mount Points

The best way to understand “how it works” is to look at a practical case, which is what we are going to do here. Suppose you just purchased a brand new hard disk with no partitions on it. Your **Mandrake Linux** partition is completely full, and rather than starting again from scratch, you decide to move a whole section of the tree structure to your new hard disk. Because your new disk has a lot of capacity, you decide to move your biggest directory on to it: `/usr`. But first, a bit of theory.

8.1. Principles

As we already mentioned in the *Installation Guide*, every hard disk is divided into several partitions, and each of these contains a file system. While *Windows* assigns a letter to each of these file systems (actually, only to those it recognizes), *GNU/Linux* has a unique tree structure of files, and each file system is *mounted* at one location in the tree structure.

Just as *Windows* needs a “C: drive”, *GNU/Linux* must be able to mount the root of its file tree (`/`) on a partition which contains the *root filesystem*. Once the root is mounted, you can mount other file systems in the tree structure at various *mount points* within the tree. Any directory below the root structure can act as a mount point, and you can mount the same filesystem several times.

This allows great configuration flexibility. For example, if you were to configure a web server, it is fairly common to dedicate an entire partition to the directory that hosts the web-server data. The directory that usually contains the data is `/var/www` and acts as the mounting point for the partition. You can see in figure 8-1 and figure 8-2 how the system looks before and after mounting the filesystem.

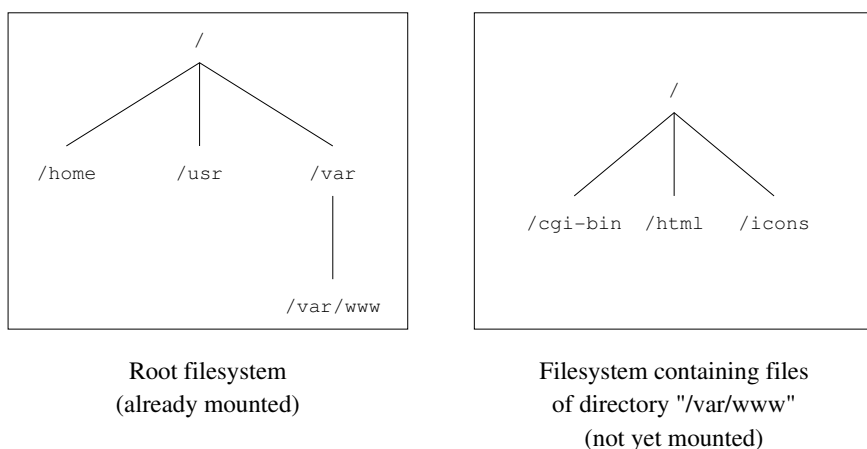


Figure 8-1. A Not Yet Mounted Filesystem

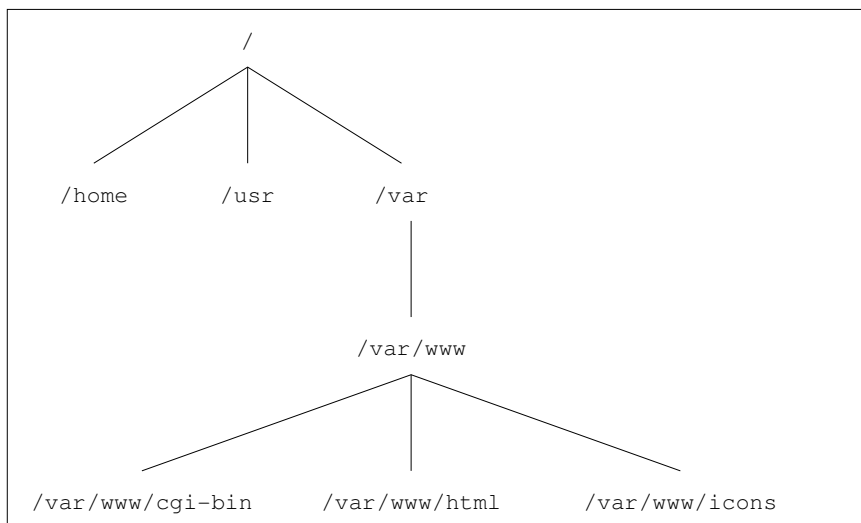


Figure 8-2. Filesystem Is Now Mounted

As you can imagine, this offers a number of advantages: the tree structure will always be the same, whether it's on a single filesystem or extended over several dozen.¹ This flexibility allows you to move a key part of the tree structure to another partition when space becomes scarce, which is what we are going to do here.

There are two things you need to know about mount points:

1. the directory which acts as a mount point must exist
2. and this directory **should preferably be empty**: if a directory chosen as a mount point already contains files and subdirectories, these will simply be “hidden” by the newly mounted filesystem. The files haven't been deleted, but they will not be accessible until you free the mount point.

8.2. Partitioning a Hard Disk, Formatting a Partition

There are two things to keep in mind as you read through this section: a hard disk is divided into partitions, and each of these partitions hosts a filesystem. Your brand new hard disk has neither, so we will begin with partitioning. In order to proceed with partitioning, you must be root.

First, you have to know the “name” of your hard disk (i.e.: what file designates it). Suppose the new drive is set up as the slave on your primary IDE interface. In that case, it will be known as `/dev/hdb`.² Please refer to the *Starter Guide's Managing Your Partitions* section, which will explain how to partition a disk. *DiskDrake* will also create the file systems for you, so once the partitioning and file system creation steps are complete, we can proceed.

8.3. The mount and umount Commands

Now that the filesystem has been created, you can mount the partition. Initially, it will be empty, since the system hasn't had access to the filesystem for files to have been added to it. The command to mount file systems is the `mount` command, and its syntax is as follows:

```
mount [options] <-t type> [-o mount options] <device> <mounting point>
```

In this case, we want to temporarily mount our partition on `/mnt` (or any other mount point you have chosen – remember that the mount point must exist). The command for mounting our newly created partition is:

```
$ mount -t ext2 /dev/hdb1 /mnt
```

1. *GNU/Linux* can manage up to 64 simultaneously mounted file systems.

2. Determining the name of a disk is explained in the *Installation Guide*.

The `-t` option is used to specify what type of file system the partition is supposed to host. The file systems you will most frequently encounter are ext2FS (the *GNU/Linux* file system), VFAT (for all *DOS/Windows* partitions: FAT 12, 16 or 32) and ISO9660 (CD-ROM filesystem). If you do not specify any type, `mount` will try and guess which filesystem is hosted by the partition by reading the superblock.

The `-o` option is used to specify one or more mounting options. The options appropriate for a particular filesystem will depend on the filesystem being used. Refer to the `mount(8)` man page for more details.

Now that you've mounted your new partition, it's time to copy the entire `/usr` directory onto it:

```
$ (cd /usr && tar cf - .) | (cd /mnt && tar xpvf -)
```

Now that the files are copied, we can unmount our partition. To do this, use the `umount` command. The syntax is simple:

```
umount <mount point|device>
```

So, to unmount our new partition, we can type:

```
$ umount /mnt
```

or:

```
$ umount /dev/hdb1
```

Since this partition is going to “become” our `/usr` directory, we need to tell this to the system. To do this, we edit:

8.4. The `/etc/fstab` File

The `/etc/fstab` file makes it possible to automate the mounting of certain file systems, especially at system start-up. It contains a series of lines describing the file systems, their mount points and other options. Here is an example of an `/etc/fstab` file:

```
/dev/hda1 / ext2 defaults 1 1
/dev/hda5 /home ext2 defaults 1 2
/dev/hda6 swap swap defaults 0 0
/dev/fd0 /mnt/floppy auto sync,user,noauto,nosuid,nodev,unhide 0 0
/dev/cdrom /mnt/cdrom auto user,noauto,nosuid,exec,nodev,ro 0 0
none /proc proc defaults 0 0
none /dev/pts devpts mode=0622 0 0
```

Each line consists of:

- the device hosting the filesystem
- the mount point
- the type of filesystem
- the mounting options
- the dump utility backup *flag*
- `fsck`'s (*FileSystem Check*) checking order.

There is **always** an entry for the root filesystem. The *swap* partitions are special since they are not visible in the tree structure, and the mount point field for those partitions contains the *swap* keyword. As for the `/proc` filesystem, it will be described in more detail in “*The /proc Filesystem*”, page 59. Another special filesystem is `/dev/pts`.

At this point, we've moved the entire `/usr` hierarchy to `/dev/hdb1` and we want this partition to be mounted as `/usr` at boot time. To accomplish this, add the following entry to the `/etc/fstab` file.

```
/dev/hdb1 /usr ext2 defaults 1 2
```

Now the partition will be mounted at each boot, and will be checked for errors if necessary.

There are two special options: `noauto` and `user`. The `noauto` option specifies that the filesystem should not be mounted at start-up, and is mounted only when you tell it to. The `user` option specifies that any user can mount and unmount the filesystem. These two options are typically used for the CD-ROM and floppy drives. There are other options, and `/etc/fstab` has a man page (`fstab(5)`) you can read for more information.

One advantage of using `/etc/fstab` is that it simplifies the `mount` command syntax. To mount a filesystem described in the file, you can either reference the mount point or the device. To mount a floppy disk, you can type:

```
$ mount /mnt/floppy
```

or:

```
$ mount /dev/fd0
```

To finish our partition moving example, let's review what we've already done. We copied the `/usr` hierarchy and modified `/etc/fstab` so that the new partition will be mounted at start-up. But for the moment, the old `/usr` files are still in their original place on the drive, so we need to delete them to free up space (which was, after all, our initial goal). To do so, you first need to go to single user mode by issuing the `telinit 1` command on the command line.

- Next, we delete all files in the `/usr` directory. Remember that we're still referring to the "old" directory, since the newer, larger one is not yet mounted. `rm -Rf /usr/*`
- Finally, we mount the new `/usr`: `mount /usr/`.

And that's it. Now, go back to multi-user mode (`telinit 3` for standard text mode or `telinit 5` for the *X Window System*), and if there is no further administrative work left, you should now log off from the root account.

8.5. A Note About The Supermount Feature

Newer kernels, like the ones that are shipped with **Mandrake Linux** bring an interesting feature for users that frequently use floppy and CD disks. Depending on the chosen security level, the supermount feature may or may not be installed on your system. Supermount automatically mounts and unmounts media as they are inserted or removed. This is quite handy, since it means there is no need to run `mount` or `umount` to access the device.

Chapter 9. The Linux Filesystem

Naturally, your *GNU/Linux* system is contained on your hard disk within a filesystem. Here, we'll discuss the various aspects of filesystems available on *GNU/Linux*, as well as the possibilities they offer.

9.1. Comparison of a Few Filesystems

During installation, you can choose different **file systems** for your partitions, so they will be formatted using different algorithms.

Unless you are a specialist, choosing a filesystem is not obvious. We'll quickly take a look at a few current file systems, all of which are all available under **Mandrake Linux**.

9.1.1. Different Usable Filesystems

9.1.1.1. Ext2FS

The **Second Extended Filesystem** (its abbreviated form is **Ext2FS** or simply **ext2**) has been *GNU/Linux*'s default filesystem for many years. It replaced the **Extended File System** (that's where the "Second" comes from). The "new" filesystem corrected certain problems and limitations of its predecessor.

Ext2FS respects the usual standards for Unix-type filesystems. Since its inception, it was destined to evolve while still offering great robustness and good performance.

9.1.1.2. Ext3

Like its name suggests, the **Third Extended File System** is Ext2FS' successor. It is compatible with the latter but enhanced by incorporating **journaling**.

One of the major flaws of "traditional" filesystems like Ext2FS is their low tolerance to abrupt system breakdowns (power failure or crashing software). Generally speaking, once the system is restarted, these sorts of events involve a very long examination of the filesystem's structure and attempts to correct errors, which sometimes result in an extended corruption. This corruption could cause partial or total loss of saved data.

Journaling answers this problem. To simplify, let's say that what we're doing is storing the actions (such as the saving of a file) **before** really doing it. We could compare this functionality to that of a boat captain who uses a log book to note daily events. The result: an always coherent filesystem. And if problems occur, the verification is very rapid and the eventual repairs, very limited. The time spent to verify a filesystem is thus proportional to its actual use and not related to its size.

So, Ext3FS offers journal filesystem technology while keeping Ext2FS' structure, ensuring excellent compatibility. This makes it very easy to switch from Ext2FS to Ext3FS and back.

9.1.1.3. ReiserFS

Unlike Ext3FS, **ReiserFS** was written from scratch. It is a journalized filesystem like Ext3FS, but its internal structure is radically different because it uses binary-tree concepts inspired by database software.

9.1.1.4. JFS

JFS is the journalized filesystem designed and used by IBM. Proprietary and closed at first, IBM decided to open it to access by the free software movement. Its internal structure is close to ReiserFS'.

	Ext2FS	Ext3FS	ReiserFS	JFS
--	--------	--------	----------	-----

9.1.2. Differences Between the Filesystems

	Ext2FS	Ext3FS	ReiserFS	JFS
Stability	Excellent	Good	Good	Medium
Tools to restore erased files	Yes (complex)	Yes (complex)	No	No
Reboot time after crash	Long, even very long	Fast	Very fast	Very fast
Status of the data in case of a crash	Generally speaking, good, but high risk of partial or total data loss	N/A	Very good. Complete data loss is very rare	Very good

Table 9-1. Filesystem Characteristics

The maximum size of a file depends on a lot of parameters (e.g. the block size for ext2/ext3), and is likely to evolve depending on the kernel version and architecture. According to the filesystem limits, the current maximum size is currently near or greater than 2 TeraBytes (TB, 1 TB=1024 GB) and for JFS can go up to 4 PetaBytes (PB, 1 Pb=1024 TB). Unfortunately, these values are also limited to maximum block device size, which in the current 2.4.X kernel is limited (for X86 arch only) to 2TB¹ even in RAID mode. For more information, consult Adding Support for Arbitrary File Sizes to the Single UNIX Specification (http://ftp.sas.com/standards/large.file/x_open.20Mar96.html).

9.1.3. And Performance Wise?

It is always very difficult to compare performance between filesystems. All tests have their limitations and the results must be interpreted with caution. Nowadays, Ext2FS is very mature but its development is slow; on the other hand, journal filesystems like Ext3FS and ReiserFS evolve very rapidly. Comparisons done a couple of months or weeks ago are already too old. Let's not forget that today's material (specially concerning hard drive capacities) has greatly leveraged the differences between them. However JFS is currently showing the best performance.

Each system offers advantages and disadvantages. In fact, it all depends on how you use your machine. A simple desktop machine will be happy with Ext2FS. For a server, a journalized filesystem like Ext3FS is preferred. ReiserFS, perhaps because of its genesis, is more suited to a database server. JFS is preferred in cases where filesystem throughput is the main issue.

For "normal" use, the four filesystems give approximately the same results. ReiserFS allows you to access small files rapidly, but it is fairly slow in manipulating large files (many megabytes). In most cases, the advantages brought by ReiserFS' journaling capabilities outweigh its drawbacks.

9.2. Everything is a File

The *Starter Guide* introduced the file ownership and permissions access concepts, but really understanding the *UNIX filesystem* (and this also applies to *Linux' ext2fs*) requires that we redefine the concept of "What is a file."

Here, "everything" **really** means everything. A hard disk, a partition on a hard disk, a parallel port, a connection to a web site, an *Ethernet* card: all these are files. Even directories are files. *Linux* recognizes many types of files in addition to the standard files and directories. Note that by file type here, we do not mean the type of the **contents** of a file: for *GNU/Linux* and any *UNIX* system, a file, whether it be a PNG image, a binary file or whatever, is just a stream of bytes. Differentiating files according to their contents is left to applications.

1. You may wonder how to achieve such capacities with hard drives that barely store 180GB. Using three RAID cards each hosting 8*128Gb drives, you can get 3TB.

9.2.1. The Different File Types

If you remember, when you do `ls -l`, the character before the access rights identifies the type of a file. We already saw two types of files: regular files (-) and directories (d). You can also find other types if you wander through the file tree and list the contents of directories:

1. **Character mode files:** these files are either special system files (such as `/dev/null`, which we already discussed), or peripherals (serial or parallel ports), which share the trait that their contents (if they have any) are not *buffered* (meaning they are not kept in memory). Such files are identified by the letter `c`.
2. **Block mode files:** these files are peripherals, and unlike character files, their contents **are** buffered. For example, some files in this category are: hard disks, partitions on a hard disk, floppy drives, CD-ROM drives and so on. Files `/dev/hda`, `/dev/sda5` are example of block mode files. In `ls -l` output, these are identified by the letter `b`.
3. **Symbolic links:** these files are very common, and heavily used in the **Mandrake Linux** system startup procedure (see chapter “*The Start-Up Files: init sysv*”, page 63). As their name implies, their purpose is to link files in a symbolic way, which means that such files may or may not point to an existing file. This will be explained later in this chapter. They are very frequently (and wrongly, as we will see later) called “*soft links*”, and are identified by an ‘`l`’.
4. **Named pipes:** in case you were wondering, yes, these are very similar to pipes used in *shell* commands, but with the difference that these actually have names. Read on to learn more. They are very rare, however, and it is not likely that you will see one during your journey into the file tree. Just in case you do, the letter identifying them is `p`. To learn more, have a look at “*Anonymous Pipes and Named Pipes*”, page 54.
5. **Sockets:** this is the file type for all network connections, but only a few of them have names. What’s more, there are different types of sockets and only one can be linked, but this is way beyond the scope of this book. Such files are identified by the letter `s`.

Here is a sample of each file:

```
$ ls -l /dev/null /dev/sda /etc/rc.d/rc3.d/S20random /proc/554/maps \
/tmp/ssh-queen/ssh-510-agent
crw-rw-rw-  1 root    root      1,   3 May  5  1998 /dev/null
brw-rw----  1 root    disk      8,   0 May  5  1998 /dev/sda
lrwxrwxrwx  1 root    root      16 Dec  9 19:12 /etc/rc.d/rc3.d/
S20random -> ../init.d/random*
pr--r--r--  1 queen   queen      0 Dec 10 20:23 /proc/554/maps|
srwx-----  1 queen   queen      0 Dec 10 20:08 /tmp/ssh-queen/
ssh-510-agent=
$
```

9.2.2. Inodes

Inodes are, along with the “Everything Is a File” paradigm, a fundamental part of any *UNIX* file system. The word “*inode*” is short for *Information NODE*.

Inodes are stored on disk in an **inode table**. They exist for all types of files which may be stored on a filesystem, including directories, named pipes, character mode files and so on. Which leads to this other famous sentence: “The inode is the file”. Inodes how *UNIX* identifies a file in a unique way.

Yes, you didn’t misread that: on *UNIX*, you **do not identify a file by its name**, but by its inode number.² The reason for this is that the same file can have several names, or even no name. A file name, in *UNIX*, is just an entry in a directory inode. Such an entry is called a **link**. Let’s look at links in more detail.

2. Important: notice that inode numbers are unique **per filesystem**, which means that an inode with the same number can exist on another filesystem. This leads to the difference between on-disk inodes and in-memory inodes. While two on-disk inodes can have the same number if they are on two different filesystems, in-memory inodes have a unique number all across the system. One solution to obtain uniqueness, for example, is to hash the on-disk inode number against the block device identifier.

9.3. Links

The best way to understand what links are is to look at an example. Let's create a (regular) file:

```
$ pwd
/home/queen/example
$ ls
$ touch a
$ ls -il a
32555 -rw-rw-r-- 1 queen queen 0 Dec 10 08:12 a
```

The `-i` option of the `ls` command prints the inode number, which is the first field on the output. As you can see, before we created file `a`, there were no files in the directory. The other field of interest is the third one, which is the number of file links (well, inode links, in fact).

The `touch a` command can be separated into two distinct actions:

- creation of an inode, to which the operating system has given the number 32555, and whose type is the one of a regular file;
- and creation of a link to this inode, named `a`, in the current directory, `/home/queen/example`. Therefore, the `/home/queen/example/a` file is a link to the inode numbered 32555, and it is currently the only one: the link counter shows 1.

But now, if we type:

```
$ ln a b
$ ls -il a b
32555 -rw-rw-r-- 2 queen queen 0 Dec 10 08:12 a
32555 -rw-rw-r-- 2 queen queen 0 Dec 10 08:12 b
$
```

we create another link to the same inode. As you can see, we did not create a file named `b`. Instead, we just added another link to the inode numbered 32555 in the same directory, and attributed the name `b` to this new link. You can see on the `ls -l` output that the link counter for the inode is now 2 rather than 1.

Now, if we do:

```
$ rm a
$ ls -il b
32555 -rw-rw-r-- 1 queen queen 0 Dec 10 08:12 b
$
```

we see that even though we deleted the “original file”, the inode still exists. But now, the only link to it is the file named `/home/queen/example/b`.

Therefore, a file under *UNIX* has no name; instead, it has one or more *link(s)* in one or more directory(ies).

Directories themselves are also stored into inodes, but their link count, unlike all other file types, is the number of subdirectories within them. There are at least two links per directory: the directory itself (`.`) and its parent directory (`..`).

Typical examples of files which are not linked (i.e.: have no name) are network connections; you will never see the file corresponding to your connection to the Mandrake Linux web site (www.mandrakelinux.com) in your file tree, no matter which directory you look in. Similarly, when you use a *pipe* in the *shell*, the inode corresponding to the pipe exists, but it is not linked.

9.4. “Anonymous” Pipes and Named Pipes

Let's get back to the example of pipes, as it is quite interesting and is also a good illustration of the links notion. When you use a pipe in a command line, the *shell* creates the pipe for you and operates so that the command before the pipe writes to it, while the command after the pipe reads from it. All pipes, whether they be anonymous (like the ones used by the *shells*) or named (see below) act like FIFOs (*First In, First Out*). We already saw examples of how to use pipes in the *shell*, but let's take one more look for the sake of our demonstration:

```
$ ls -d /proc/[0-9] | head -5
/proc/1/
/proc/2/
```

```
/proc/3/
/proc/4/
/proc/5/
```

One thing that you will not notice in this example (because it happens too fast for one to see) is that writes on pipes are blocking. This means that when the `ls` command writes to the pipe, it is blocked until a process at the other end reads from the pipe. In order to visualize the effect, you can create named pipes, which unlike the pipes used by *shells*, have names (i.e.: they are linked, whereas *shell* pipes are not).³ The command to create a named pipe is `mkfifo`:

```
$ mkfifo a_pipe
$ ls -il
total 0
 169 prw-rw-r--  1 queen    queen      0 Dec 10 14:12 a_pipe|
#
# You can see that the link counter is 1, and that the output shows
# that the file is a pipe ('p').
#
# You can also use ln here:
#
$ ln a_pipe the_same_pipe
$ ls -il
total 0
 169 prw-rw-r--  2 queen    queen      0 Dec 10 15:37 a_pipe|
 169 prw-rw-r--  2 queen    queen      0 Dec 10 15:37 the_same_pipe|
$ ls -d /proc/[0-9] >a_pipe
#
# The process is blocked, as there is no reader at the other end.
# Type C-z to suspend the process...
#
zsh: 3452 suspended  ls -d /proc/[0-9] > a_pipe
#
# ...Then put in into the background:
#
$ bg
[1] + continued  ls -d /proc/[0-9] > a_pipe
#
# now read from the pipe...
#
$ head -5 <the_same_pipe
#
# ...the writing process terminates
#
[1] + 3452 done      ls -d /proc/[0-9] > a_pipe
/proc/1/
/proc/2/
/proc/3/
/proc/4/
/proc/5/
#
```

Similarly, reads are also blocking. If we execute the above commands in the reverse order, we will see that `head` blocks, waiting for some process to give it something to read:

```
$ head -5 <a_pipe
#
# Program blocks, suspend it: C-z
#
zsh: 741 suspended  head -5 < a_pipe
#
# Put it into the background...
#
$ bg
[1] + continued  head -5 < a_pipe
#
# ...And give it some food :)
#
$ ls -d /proc/[0-9] >the_same_pipe
$ /proc/1/
/proc/2/
/proc/3/
```

3. Other differences exist between the two kinds of pipes, but they are out of the scope of this book.

```
/proc/4/
/proc/5/
[1] + 741 done      head -5 < a_pipe
$
```

You can also see an undesired effect in the previous example: the `ls` command has terminated before the `head` command took over. The consequence is that you were immediately returned to the prompt, but `head` executed later and you only saw its output after returning.

9.5. “Special” Files: Character Mode and Block Mode Files

As already stated, such files are either files created by the system or peripherals on your machine. We also mentioned that the contents of block mode character files were buffered, while character mode files were not. In order to illustrate this, insert a floppy into the drive and type the following command twice:

```
$ dd if=/dev/fd0 of=/dev/null
```

You should have observed the following: the first time the command was launched, the entire contents of the floppy were read. The second time you executed the command, there was no access to the floppy drive at all. This is because the contents of the floppy were buffered the first time you launched the command – and you did not change anything on the floppy between the two instances.

But now, if you want to print a big file this way (yes it will work):

```
$ cat /a/big/printable/file/somewhere >/dev/lp0
```

the command will take as much time, whether you launch it once, twice or fifty times. This is because `/dev/lp0` is a character mode file, and its contents are not buffered.

The fact that block mode files are buffered has a nice side effect: not only are reads buffered, but writes are buffered too. This allows for writes to the disks to be asynchronous: when you write a file on disk, the write operation itself is not immediate. It will only occur when the *Linux* kernel decides to execute the write to the hardware.

Finally, each special file has a *major* and *minor* number. On a `ls -l` output, they appear in place of the size, as the size for such files is irrelevant:

```
ls -l /dev/hda /dev/lp0
brw-rw---- 1 root    disk      3,   0 May  5 1998 /dev/hda
crw-rw---- 1 root    daemon    6,   0 May  5 1998 /dev/lp0
```

Here, the major and minor of `/dev/hda` are 3 and 0, whereas for `/dev/lp0`, they are 6 and 0. Note that these numbers are unique per file category, which means that there can be a character mode file with major 3 and minor 0 (this file actually exists: `/dev/ttyp0`), and similarly, there can be a block mode file with major 6 and minor 0. These numbers exist for a simple reason: it allows the kernel to associate the correct operations to these files (that is, to the peripherals these files refer to): you do not handle a floppy drive the same way as, say, a SCSI hard drive.

9.6. Symbolic Links, Limitation of “Hard” Links

Here we have to face a very common misconception, even among *UNIX* users, which is mainly due to the fact that links as we have seen them so far (wrongly called “hard” links) are only associated with regular files (and we have seen that it is not the case – since even symbolic links are “linked”). But this requires that we first explain what symbolic links (“soft” links, or even more often “symlinks”) are.

Symbolic links are files of a particular type whose sole contents is an arbitrary string, which may or may not point to an existing file. When you mention a symbolic link on the command line or in a program, in fact, you access the file it points to, if it exists. For example:

```
$ echo Hello >myfile
$ ln -s myfile mylink
$ ls -il
total 4
 169 -rw-rw-r-- 1 queen    queen      6 Dec 10 21:30 myfile
 416 lrwxrwxrwx 1 queen    queen      6 Dec 10 21:30 mylink
```

```
-> myfile
$ cat myfile
Hello
$ cat mylink
Hello
```

You can see that the file type for mylink is l, for symbolic *Link*. The access rights for a symbolic link are not significant: they will always be rwxrwxrwx. You can also see that it is a different file from myfile, as its inode number is different. But it refers to it symbolically, therefore when you type `cat mylink`, you will in fact print the contents of the myfile file. To demonstrate that a symbolic link contains an arbitrary string, we can do the following:

```
$ ln -s "I'm no existing file" anotherlink
$ ls -il anotherlink
 418 lrwxrwxrwx    1 queen    queen          20 Dec 10 21:43 anotherlink
-> I'm no existing file
$ cat anotherlink
cat: anotherlink: No such file or directory
$
```

But symbolic links exist because they overcome several limitations encountered by normal (“hard”) links:

- You cannot create a link to an inode in a directory which is on a different filesystem than the said inode. The reason is simple: the link counter is stored in the inode itself, and inodes can not be shared along filesystems. Symlinks allow this;
- You cannot link directories, since we have seen that the link counter for a directory has a special usage. But you can make a symlink point to a directory and use it as if it were actually a directory.

Symbolic links are therefore very useful in several circumstances, and very often, people tend to use them to link files together even when a normal link could be used instead. One advantage of normal linking, though, is that you do not lose the file if you delete the “original one”.

Lastly, if you observed carefully, you know what the size of a symbolic link is: it is simply the size of the string.

9.7. File Attributes

The same way that FAT has file attributes (archive, system file, invisible), *ext2fs* has its own, but they are different. We’ll briefly go over them here for the sake of completeness, but they are very seldom used. However, if you really want a secure system, read on.

There are two commands for manipulating file attributes: `lsattr(1)` and `chattr(1)`. You probably guessed it, `lsattr` *LiSts* attributes, whereas `chattr` *CHanges* them. These attributes can only be set on directories and regular files. The following attributes are possible:

1. *A (no Access time)*: if a file or directory has this attribute set, whenever it is accessed, either for reading or for writing, its last access time will not be updated. This can be useful, for example, on files or directories which are often accessed for reading, especially since this parameter is the only one which changes on an inode when it’s open read-only.
2. *a (append only)*: if a file has this attribute set and is open for writing, the only operation possible will be to append data to its previous contents. For a directory, this means that you can only add files to it, but not rename or delete any existing file. Only root can set or clear this attribute.
3. *d (no dump)*: `dump (8)` is the standard *UNIX* utility for backups. It dumps any filesystem for which the dump counter is 1 in `/etc/fstab` (see chapter “Filesystems and Mount Points”, page 47). But if a file or directory has this attribute set, unlike others, it will not be taken into account when a dump is in progress. Note that for directories, this also includes all subdirectories and files under it.
4. *i (immutable)*: a file or directory with this attribute set can not be modified at all: it can not be renamed, no further link can be created to it ⁴ and it cannot be removed. Only root can set or clear this attribute. Note that this also prevents changes to access time, therefore you do not need to set the *A* attribute when *i* is set.

4. Be sure to understand what “adding a link” means, both for a file and a directory :-)

5. *s* (*secure deletion*): when a file or directory with this attribute is deleted, the blocks it was occupying on disk are overwritten with zeroes.
6. *S* (*Synchronous mode*): when a file or directory has this attribute set, all modifications on it are synchronous and written to the disk immediately.

For example, you may want to set the *i* attribute on essential system files in order to avoid bad surprises. Also, consider the *A* attribute on man pages: this prevents a lot of disk operations and, in particular, can save some battery life on laptops.

Chapter 10. The /proc Filesystem

The /proc file system is specific to *GNU/Linux*. It is a virtual file system, so the files that you will find in this directory don't actually take up any space on your hard drive. It is a very convenient way to obtain information about the system, especially since most files in this directory are human readable (well, with a little help). Many programs actually gather information from files in /proc, format it in their own way and then display the results. There are a few programs that display information about processes (top, ps and friends) which do exactly that. /proc is also a good source of information about your hardware, and just like the programs that display processes, quite a few programs are just interfaces to the information contained in /proc.

There is also a special subdirectory, /proc/sys. It allows you to display kernel parameters and to change them, with the changes taking effect immediately.

10.1. Information About Processes

If you list the contents of the /proc directory, you will see many directories where the name of the directory is a number. These are the directories holding information on all processes currently running on the system:

```
$ ls -d /proc/[0-9]*
/proc/1/      /proc/302/    /proc/451/    /proc/496/    /proc/556/    /proc/633/
/proc/127/    /proc/317/    /proc/452/    /proc/497/    /proc/557/    /proc/718/
/proc/2/      /proc/339/    /proc/453/    /proc/5/      /proc/558/    /proc/755/
/proc/250/    /proc/385/    /proc/454/    /proc/501/    /proc/559/    /proc/760/
/proc/260/    /proc/4/      /proc/455/    /proc/504/    /proc/565/    /proc/761/
/proc/275/    /proc/402/    /proc/463/    /proc/505/    /proc/569/    /proc/769/
/proc/290/    /proc/433/    /proc/487/    /proc/509/    /proc/594/    /proc/774/
/proc/3/      /proc/450/    /proc/491/    /proc/554/    /proc/595/
```

Note that as a user, you can (logically) only display information related to your own processes, but not the ones of other users. So, let's be root and see what information is available from process 127:

```
$ su
Password:
$ cd /proc/127
$ ls -l
total 0-9
-r--r--r-- 1 root root 0 Dec 14 19:53 cmdline
lrwx----- 1 root root 0 Dec 14 19:53 cwd -> //
-r----- 1 root root 0 Dec 14 19:53 environ
lrwx----- 1 root root 0 Dec 14 19:53 exe -> /usr/sbin/apmd*
dr-x----- 2 root root 0 Dec 14 19:53 fd/
pr--r--r-- 1 root root 0 Dec 14 19:53 maps|
-rw----- 1 root root 0 Dec 14 19:53 mem
lrwx----- 1 root root 0 Dec 14 19:53 root -> //
-r--r--r-- 1 root root 0 Dec 14 19:53 stat
-r--r--r-- 1 root root 0 Dec 14 19:53 statm
-r--r--r-- 1 root root 0 Dec 14 19:53 status
$
```

Each directory contains the same entries. Here is a brief description of some of the entries:

1. **cmdline**: this (pseudo-)file contains the entire command line used to invoke the process. It is not formatted: there is no space between the program and its arguments, and there is no newline at the end of the line. In order to view it, you can use: `perl -ple 's,\00, ,g' cmdline`.
2. **cwd**: this symbolic link points to the current working directory (hence the name) of the process.
3. **environ**: This file contains all the environment variables defined for this process, in the form `VARIABLE=value`. Similar to `cmdline`, the output is not formatted at all: no newlines separate the different variables, and there is no newline at the end. One solution to view it: `perl -pl -e 's,\00,\n,g' environ`.
4. **exe**: this is a symlink pointing to the executable file corresponding to the process being run.
5. **fd**: this subdirectory contains the list of file descriptors currently opened by the process. See below.
6. **maps**: when you print the contents of this named pipe (with `cat` for example), you can see the parts of the process' address space which are currently mapped to a file. From left to right, the fields are: the address space associated to this mapping, the permissions associated to this mapping, the offset from

the beginning of the file where the mapping starts, the major and minor number (in hexadecimal) of the device on which the mapped file is located, the inode number of the file, and finally the name of the file itself. When the device is 0 and there's no inode number or filename, this is an anonymous mapping. See `mmap(2)`.

7. `root`: this is a symbolic link which points to the root directory used by the process. Usually, it will be `/`, but see `chroot(2)`.
8. `status`: this file contains various information about the process: the name of the executable, its current state, its PID and PPID, its real and effective UID and GID, its memory usage, and other information.

If we list the contents of directory `fd` for process 127, we obtain this:

```
$ ls -l fd
total 0
lrwx----- 1 root    root      64 Dec 16 22:04 0 -> /dev/console
l-wx----- 1 root    root      64 Dec 16 22:04 1 -> pipe:[128]
l-wx----- 1 root    root      64 Dec 16 22:04 2 -> pipe:[129]
l-wx----- 1 root    root      64 Dec 16 22:04 21 -> pipe:[130]
lrwx----- 1 root    root      64 Dec 16 22:04 3 -> /dev/apm_bios
lr-x----- 1 root    root      64 Dec 16 22:04 7 -> pipe:[130]
lrwx----- 1 root    root      64 Dec 16 22:04 9 ->
/dev/console
$
```

In fact, this is the list of file descriptors opened by the process. Each opened descriptor is shown by a symbolic link, where the name is the descriptor number, and which points to the file opened by this descriptor¹. Notice the permissions on the symlinks: this is the only place where they make sense, as they represent the permissions with which the file corresponding to the descriptor has been opened.

10.2. Information on The Hardware

Apart from the directories associated to the different processes, `/proc` also contains a myriad of information on the hardware present in your machine. A list of files from the `/proc` directory gives the following:

```
$ ls -d [a-z]*
apm      dma      interrupts  loadavg  mounts    rtc      swaps
bus/     fb        ioports    locks    mtrr      scsi/    sys/
cmdline  filesystems kcore      meminfo  net/      self/    tty/
cpuinfo  fs/       kmsg       misc     partitions slabinfo uptime
devices  ide/      ksyms      modules  pci       stat     version
$
```

For example, if we look at the contents of `/proc/interrupts`, we can see that it contains the list of interrupts currently used by the system, along with the peripheral which holds them. Similarly, `ioports` contains the list of input/output address ranges currently busy, and lastly `dma` does the same for DMA channels. Therefore, in order to chase down a conflict, look at the contents of these three files:

```
$ cat interrupts
CPU0
0:    127648      XT-PIC  timer
1:     5191      XT-PIC  keyboard
2:       0       XT-PIC  cascade
5:    1402       XT-PIC  xirc2ps_cs
8:       1       XT-PIC  rtc
10:      0       XT-PIC  ESS Solo1
12:    2631      XT-PIC  PS/2 Mouse
13:       1      XT-PIC  fpu
14:   73434      XT-PIC  ide0
15:   80234      XT-PIC  ide1
NMI:         0
$ cat ioports
0000-001f : dma1
0020-003f : pic1
0040-005f : timer
0060-006f : keyboard
0070-007f : rtc
```

1. If you remember what was described in section *Redirections and Pipes*, page 17, you know what descriptors 0, 1 and 2 stand for.


```

0080-008f : dma page reg
00a0-00bf : pic2
00c0-00df : dma2
00f0-00ff : fpu
0170-0177 : ide1
01f0-01f7 : ide0
0300-030f : xirc2ps_cs
0376-0376 : ide1
03c0-03df : vga+
03f6-03f6 : ide0
03f8-03ff : serial(auto)
1050-1057 : ide0
1058-105f : ide1
1080-108f : ESS Solo1
10c0-10cf : ESS Solo1
10d4-10df : ESS Solo1
10ec-10ef : ESS Solo1
$ cat dma
4: cascade
$

```

Or, more simply, use the `lsdev` command, which gathers information from these files and sorts them by peripheral, which is undoubtedly more convenient.²:

```

$ lsdev
Device          DMA  IRQ  I/O Ports
-----
cascade         4    2
dma              0080-008f
dma1             0000-001f
dma2             00c0-00df
ESS              1080-108f 10c0-10cf 10d4-10df 10ec-10ef
fpu              13   00f0-00ff
ide0             14   01f0-01f7 03f6-03f6 1050-1057
ide1             15   0170-0177 0376-0376 1058-105f
keyboard         1    0060-006f
Mouse            12
pic1             0020-003f
pic2             00a0-00bf
rtc              8    0070-007f
serial           03f8-03ff
Solo1            10
timer            0    0040-005f
vga+             03c0-03df
xirc2ps_cs       5    0300-030f
$

```

An exhaustive listing of files would take too long, but here's the description of some of them:

- `cpuinfo`: this file contains, as its name says, information on the processor(s) present in your machine.
- `modules`: this file contains the list of modules currently used by the kernel, along with the usage count for each one. In fact, this is the same information as what is reported by the `lsmod` command.
- `meminfo`: this file contains information on memory usage at the time you print its contents. The `free` command. will display the same information in a easier-to-read format.
- `apm`: if you have a laptop, displaying the contents of this file allows you to see the state of your battery. You can see whether the AC is plugged in, the charge level of your battery, and if the APM *BIOS* of your laptop supports it (unfortunately this is not the case for all), the remaining battery life in minutes. The file isn't very readable by itself, therefore you want to use the `apm` command instead, which gives the same information in a human readable format.
- `bus`: this subdirectory contains information on all peripherals found on different buses in your machine. The information is usually not readable, and for the most part it is reformatted with external utilities: `lsp-cidrake`, `lspnp`, etc.

2. `lsdev` is part of the `procinfo` package.

10.3. The /proc/sys Sub-Directory

The role of this subdirectory is to report different kernel parameters, and to allow you to interactively change some of them. As opposed to all other files in /proc, some files in this directory can be written to, but only by root.

A list of directories and files would take too long to describe, mostly because the contents of the directories are system dependant and that most files will only be useful for very specialized applications. However, here are three common uses of this subdirectory:

1. Allow routing: Even if the default kernel from **Mandrake Linux** is able to route, you must explicitly allow it to do so. For this, you just have to type the following command as root:

```
$ echo 1 >/proc/sys/net/ipv4/ip_forward
```

Replace the 1 by a 0 if you want to forbid routing.

2. Prevent IP spoofing: IP spoofing consists in making one believe that a packet coming from the outside world comes from the interface by which it arrives. This technique is very commonly used by *crackers*³, but you can make the kernel prevent this kind of intrusion. Type:

```
$ echo 1 >/proc/sys/net/ipv4/conf/all/rp_filter
```

and this kind of attack becomes impossible.

3. Increase the size of the table of open files and the inode table: The size of the table of open files and the inode table is dynamic under *GNU/Linux*. The default values are usually sufficient for normal use, but they may be too conservative if your machine is a huge server (a database server for example). You will know that you need to increase the size of the table if you get messages that processes cannot open any more files because the table is full. If you increase the size of the open file table, then don't forget that the size of the inode table has to be increased as well. These two lines will solve the problem:

```
$ echo 8192 >/proc/sys/fs/file-max  
$ echo 16384 >/proc/sys/fs/inode-max
```

These changes will only remain in effect while the system is running. If the system is rebooted, then the values will go back to their default. To reset the values to something other than the default at boot time, you can take the commands that you typed at the shell prompt and add them to /etc/rc.d/rc.local so that you avoid typing them each time. Another solution is to modify /etc/sysctl.conf, see sysctl.conf (5).

3. And not *hackers*!

Chapter 11. The Start-Up Files: init sysv

In the *UNIX* tradition, there are two system startup schemes: the *BSD* scheme and the “*System V*” scheme, each named after the *UNIX* system which first implemented them. (*Berkeley Software Distribution* and *AT&T UNIX System V*). The *BSD* scheme is simpler, but the *System V* scheme, while not as easy to understand (which will change once you finish this chapter), is definitely more flexible to use in today’s systems.

11.1. In the Beginning Was init

When the system starts, and after the kernel has configured everything and mounted the root file system, it executes `/sbin/init` ¹. `init` is the father of all processes on the system, and it is responsible for taking the system to the desired *runlevel*. We will look at runlevels in the next section.

The `init` configuration file is called `/etc/inittab`. This file has its own manual page (`inittab(5)`), so we’ll document just a few of the configuration values possible.

The first line which should be the focus of your attention is this one:

```
si::sysinit:/etc/rc.d/rc.sysinit
```

This line tells `init` that `/etc/rc.sysinit` is to be run once the system has been initialized. (`si` stands for *System Init*) To determine the default runlevel, `init` will then look for the line containing the `initdefault` keyword:

```
id:5:initdefault:
```

In this case, `init` knows that the default runlevel is 5. It also knows that to enter level 5, it must run the following command:

```
l5:5:wait:/etc/rc.d/rc 5
```

As you can see, the syntax for each runlevel is similar.

`init` is also responsible for restarting (`respawn`) some programs that can’t be started by any other process. For example, each of the login programs that run on the six virtual consoles are started by `init`. ². For the second virtual console, this gives:

```
2:2345:respawn:/sbin/mingetty tty2
```

11.2. Runlevels

All files related to system startup are located in the directory `/etc/rc.d`. Here is the list of the files:

```
$ ls /etc/rc.d
init.d/  rc.local*  rc0.d/  rc2.d/  rc4.d/  rc6.d/
rc*      rc.sysinit* rc1.d/  rc3.d/  rc5.d/
```

As we just discussed, `rc.sysinit` is the first file run by the system. This file is responsible for setting up the basic machine configuration: keyboard type, configuration of certain devices, file system checking, etc.

Then the `rc` script is run, with the desired runlevel as an argument. As we have seen, the runlevel is a simple integer, and for each runlevel `<x>` defined, there must be a corresponding `rc<x>.d` directory. In a typical **Mandrake Linux** installation, you might therefore see that there are six runlevels:

- 0: complete machine stop
- 1: *single-user* mode; to be used in the event of major problems or system recovery

1. Which is why putting `/sbin` on a file system other than the root is a very bad idea. The kernel hasn’t mounted any other partitions at this point, and therefore won’t be able to find `/sbin/init`.

2. If you don’t want six virtual consoles, you may add or remove them by modifying this file. If you’re increasing the number of consoles, you can have a maximum of 64. But don’t forget that `X` also runs on a virtual console, so leave it at least one free for it.

- 2: *multi-user* mode, without networking
- 3: Multi-user mode, but this time with networking
- 4: unused
- 5: like runlevel 3, but also launches the graphical login interface
- 6: restart.

Let's take a look at the contents of directory `rc5.d`:

```
$ ls rc5.d
K15postgresql@  K60atd@        S15netfs@      S60lpd@        S90xfs@
K20nfs@         K96pcmcia@      S20random@     S60nfs@        S99linuxconf@
K20rstatd@      S05apmd@        S30syslog@     S66ypasswdd@   S99local@
K20rusersd@     S10network@     S40crond@      S75keytable@
K20rwhod@       S11portmap@     S50inet@       S85gpm@
K30sendmail@    S12ypserv@      S55named@      S85httpd@
K35smb@         S13ypbind@      S55routed@     S85sound@
```

As you can see, all the files in this directory are symbolic links, and they all have a very specific form. Their general form is:

```
<S|K><order><service_name>
```

The *S* means *Start* service, and *K* means *Kill* (stop) service. The scripts are run in ascending numerical order, and if two scripts have the same number, ascending alphabetical order will apply. We can also see that each symbolic link points to a given script located in `/etc/rc.d/init.d` (other than the `local` script which is responsible for controlling a specific service.)

When the system goes into a given runlevel, it starts by running the *K* links in order: `rc` looks where the link is pointing, then calls up the corresponding script with the single argument `stop`. It then runs the *S* scripts using the same method, except that the scripts are called with a `start` parameter.

So, without mentioning all the scripts, we can see that when the system goes into runlevel 5, it first runs `K15postgresql`, i.e. `/etc/rc.d/init.d/postgresql stop`. Then `K20nfs`, then `K20rstatd`, etc, until it runs the last command. Next, it runs all the *S* scripts: first `S05apmd`, which itself calls `/etc/rc.d/init.d/apmd start`, and so on.

Armed with this information, you can create your own complete runlevel in a few minutes, or prevent a service starting or stopping by deleting the corresponding symbolic link. You can also use a number of interface programs for doing this, notably *drakxservices* which uses a graphical program interface and *chkconfig* for text-mode configuration.

Chapter 12. Building and Installing Free Software

I am often asked how to install free software from sources. Compiling software yourself is really easy because most of the steps to follow are the same no matter what the software to install is. The aim of this document is to guide the beginner step by step and explain to him the meaning of each move. I assume that the reader has a minimal knowledge of the *UNIX* system (*ls* or *mkdir* for instance).

This guide is only a guide, not a reference manual. That is why several links are given at the end to answer any remaining questions. This guide can probably be improved, so I appreciate receiving any remarks or corrections on its contents.

12.1. Introduction

What makes the difference between free software and proprietary software is the access to the sources of the software¹. That means free software is distributed as archives of source code files. It may be unfamiliar to beginners because users of free software must compile source code by themselves before they can use the software.

There are compiled versions of most of the existing free software. The user in a hurry just has to install these pre-compiled binaries. Some free software is not distributed under this form, or the earlier versions are not yet distributed under binary form. Furthermore, if you use an exotic operating system or an exotic architecture, a lot of software will not be compiled for you. More importantly, compiling software by yourself allows you to enable only the interesting options or to extend the functionality of the software by adding extensions in order to obtain a program that exactly fits your needs.

12.1.1. Requirements

To build software, you need:

- a computer with a working operating system,
- general knowledge of the operating system you use,
- some space on your disk,
- a compiler (usually for the *C* language) and an archiver (*tar*),
- some food (in difficult cases, it may last a long time). A real hacker eats pizzas - not quiches.
- something to drink (for the same reason). A real hacker drinks soda – for caffeine.
- the phone number of your techie friend who recompiles his kernel each week,
- especially patience and a lot of it!

Compiling from source does not generally present a lot of problems, but if you are not used to it, the smallest snag can throw you. The aim of this document is to show you how to escape from such a situation.

12.1.2. Compilation

12.1.2.1. Principle

In order to translate source code into a binary file, a *compilation* must be done (usually from *C* or *C++* sources, which are the most widespread languages among the (*UNIX*) free software community). Some free software is written in languages which do not require compilation (for instance *perl* or the *shell*, but they still require some configuration).

C compilation is logically done by a *C* compiler, usually *gcc*, the free compiler written by the GNU project (<http://www.gnu.org/>). Compiling a complete software package is a complex task, which goes through the successive compilations of different source files (it is easier for various reasons for the programmer to put the different parts of his work in separate files). In order to make it easier on you, these repetitive operations are handled by a utility named *make*.

1. This is not completely true since some proprietary software also provides source code. But unlike what happens with free software, the final user is not allowed to use or modify the code as he wants.

12.1.2.2. The four steps of compilation

To understand how compilation works (in order to be able to solve possible problems), you have to know the four steps. The object is to little by little convert a text file written in a language that is comprehensible to a trained human being (i.e. *C* language), into a language that is comprehensible to a machine (or a **very** well trained human being in a few cases). `gcc` executes four programs one after the other, each of which takes on one step:

1. `cpp`: The first step consists of replacing directives (*preprocessors*) by pure *C* instructions. Typically, this means inserting a header (`#include`) or defining a macro (`#define`). At the end of this stage, pure *C* code is generated.
2. `cc1`: This step consists in converting *C* into *assembly language*. The generated code depends on the target architecture.
3. `as`: This step consists of generating *object code* (or binary code) from the assembly language. At the end of this stage, a `.o` file is generated.
4. `ld`: The last step (*linkage*) links all the object files (`.o`) and the associated libraries, and produces an executable file.

12.1.3. Structure of a distribution

A correctly structured free software distribution always has the same organization:

- An `INSTALL` file, which describes the installation procedure.
- A `README` file, which contains general information related to the program (short description, author, URL where to fetch it, related documentation, useful links, etc). If the `INSTALL` file is missing, the `README` file usually contains a brief installation procedure.
- A `COPYING` file, which contains the license or describes the distribution conditions of the software. Sometimes a `LICENSE` file is used instead, with the same contents.
- A `CONTRIB` or `CREDITS` file, which contains a list of people related to the software (active participation, pertinent comments, third-party programs, etc).
- A `CHANGES` file (or less frequently, a `NEWS` file), which contains recent improvements and bug fixes.
- A `Makefile` file (see the section *make*, page 71), which allows compilation of the software (it is a necessary file for `make`). This file often does not exist at the beginning and is generated during configuration process.
- Quite often, a `configure` or `Imakefile` file, which allows one to generate a new `Makefile`, file
- A directory that contains the sources, and where the binary file is usually stored at the end of the compilation. Its name is often `src`.
- A directory that contains the documentation related to the program (usually in `man` or *Texinfo* format), whose name is often `doc`.
- Sometimes, a directory that contains data specific to the software (typically configuration files, example of produced data, or resources files).

12.2. Decompression

12.2.1. `tar.gz` archive

The standard² compression format under *UNIX* systems is the `gzip` format, developed by the GNU project, and considered as one of the best general compression tools.

`gzip` is often associated with a utility named `tar`. `tar` is a survivor of antediluvian times, when computerists stored their data on tapes. Nowadays, floppy disks and CD-ROM have replaced tapes, but `tar` is still being

2. More and more a new program, called `bzip2`, more efficient on text files (and requiring more computing power), is being used. See the later section *bzip2*, page 67 which deals specifically with this program.

used to create archives. All the files in a directory can be appended in a single file for instance. This file can then be easily compressed with gzip.

This is the reason why much free software is available as tar archives, compressed with gzip. So, their extensions are .tar.gz (or also .tgz to shorten).

12.2.2. The use of GNU Tar

To decompress this archive, gzip and then tar can be used. But the GNU version of tar (gtar) allows us to use gzip *"on-the-fly"*, and to decompress an archive file without noticing each step (and without the need for the extra disk space).

The use of tar follows this format:

```
tar <file options> <.tar.gz file> [files]
```

The <files> option is not required. If it is omitted, processing will be made on the whole archive. This argument does not need to be specified to extract the contents of a .tar.gz archive.

For instance:

```
$ tar xvfz guile-1.3.tar.gz
-rw-r--r-- 442/1002      10555 1998-10-20 07:31 guile-1.3/Makefile.in
-rw-rw-rw- 442/1002      6668 1998-10-20 06:59 guile-1.3/README
-rw-rw-rw- 442/1002      2283 1998-02-01 22:05 guile-1.3/AUTHORS
-rw-rw-rw- 442/1002     17989 1997-05-27 00:36 guile-1.3/COPYING
-rw-rw-rw- 442/1002     28545 1998-10-20 07:05 guile-1.3/ChangeLog
-rw-rw-rw- 442/1002      9364 1997-10-25 08:34 guile-1.3/INSTALL
-rw-rw-rw- 442/1002      1223 1998-10-20 06:34 guile-1.3/Makefile.am
-rw-rw-rw- 442/1002     98432 1998-10-20 07:30 guile-1.3/NEWS
-rw-rw-rw- 442/1002      1388 1998-10-20 06:19 guile-1.3/THANKS
-rw-rw-rw- 442/1002      1151 1998-08-16 21:45 guile-1.3/TODO
...
```

Among the options of tar:

- **v** makes tar verbose. This means it will display all the files it finds in the archive on the screen. If this option is omitted, the processing will be silent.
- **f** is a required option. Without it, tar tries to use a tape instead of an archive file (i.e., the /dev/rmt0 device).
- **z** allows you to process a "gzipped" archive (with a .gz extension). If this option is forgotten, tar will produce an error. Conversely, this option must not be used with an uncompressed archive.

tar allows you to perform several actions on an archive (extract, read, create, add...). An option defines which action is used:

- **x**: allows you to extract files from the archive.
- **t**: lists the contents of the archive.
- **c**: allows you to create an archive. You may use it to backup your personal files, for instance.
- **r**: allows you to add files at the end of the archive. It cannot be used with a compressed archive.

12.2.3. bzip2

A compression format named bzip2 has begun to replace gzip in general use. bzip2 produces smaller archives than gzip does, but is not yet a standard. It is only on recently made archives that the .tar.bz2 extension will be found.

bzip2 is used like gzip by means of the tar command. The only change is to replace the letter z by the letter j. For instance:

```
$ tar xvjf foo.tar.bz2
```

Some distributions may still use the option I instead:

```
$ tar xvfI foo.tar.bz2
```

Another way (which seems to be more portable, but is longer to type!):

```
$ tar --use-compress-program=bzip2 -xvf foo.tar.bz2
```

bzip2 must be installed on the system in a directory included in your PATH environment variable before you run tar.

12.2.4. Just do it!

12.2.4.1. The easiest way

Now that you are ready to decompress the archive, do not forget to do it as administrator (root). You will need to do things that a ordinary user is not allowed to do, and even if you can perform some of them as a regular user, it is simpler to just be root the whole time.

The first step is to be in the `/usr/local/src` directory and copy the archive there. You should then always be able to find the archive if you lose the installed software. If you do not have a lot of space on your disk, save the archive on a floppy disk after having installed the software. You can also delete it but be sure that you can find it on the *Web* whenever you need it.

Normally, decompressing a tar archive should create a new directory (you can check that beforehand thanks to the `t` option). Go then in that directory. You are now ready to proceed further.

12.2.4.2. The safest way

UNIX systems (of which *GNU/Linux* and *FreeBSD* are examples) can be secure systems. That means that normal users cannot perform operations that may endanger the system (format a disk, for instance) or alter other users' files. It also immunizes the system against viruses.

On the other hand, root can do everything - even running a malicious program. Having the source code available allows you to examine it for malicious code (viruses or Trojans). It is better to be cautious in this regard³.

The idea is to create a user dedicated to administration (`free` or `admin` for example) by using the `adduser` command. This user must be allowed to write in the following directories: `/usr/local/src`, `/usr/local/bin` and `/usr/local/lib`, as well as all the sub-trees of `/usr/share/man` (he also may need to be able to copy files elsewhere). I recommend that you make this user owner of the necessary directories or create a group for him and make the directories writable by the group.

Once these precautions are taken, you can follow the instructions in the section *The easiest way*, page 68.

12.3. Configuration

For purely technical interest, the fact that authors create the sources is for the *porting* of the software. Free software developed for a *UNIX* system may be used on all of the existing *UNIX* systems (whether they are free or proprietary), with some changes. That requires configuration of the software just before compiling it.

Several configuration systems exist. You have to use the one the author of the software wants (sometimes, several are needed). Usually, you can:

- Use *AutoConf* (see the section *AutoConf*, page 68) if a file named `configure` exists in the parent directory of the distribution.
- Use *imake* (see the section *imake*, page 70) if a file named `Imakefile` exists in the parent directory of the distribution.
- Run a shell *script* (for instance `install.sh`) according to the contents of the `INSTALL` file (or the `README` file)

3. A proverb from the BSD world says: "Never trust a package you don't have the sources for."

12.3.1. AutoConf

12.3.1.1. Principle

AutoConf is used to correctly configure software. It creates the files required by the compilation (*Makefile* for instance), and sometimes directly changes the sources (for instance by using a *config.h.in* file).

The principle of *AutoConf* is simple:

- The programmer of the software knows which tests are required to configure his software (eg: “which version of this *library* do you use?”). He writes them in a file named *configure.in*, following a precise syntax.
- He executes *AutoConf*, which generates a configuration script named *configure* from the *configure.in* file. This script makes the tests required when the program is configured.
- The end-user runs the script, and *AutoConf* configures everything that is needed by the compilation.

12.3.1.2. Example

An example of the use of *AutoConf*:

```
$ ./configure
loading cache ./config.cache
checking for gcc... gcc
checking whether the C compiler (gcc ) works... yes
checking whether the C compiler (gcc ) is a cross-compiler... no
checking whether we are using GNU C... yes
checking whether gcc accepts -g... yes
checking for main in -lX11... yes
checking for main in -lXpm... yes
checking for main in -lguile... yes
checking for main in -lm... yes
checking for main in -lncurses... yes
checking how to run the C preprocessor... gcc -E
checking for X... libraries /usr/X11R6/lib, headers /usr/X11R6/include
checking for ANSI C header files... yes
checking for unistd.h... yes
checking for working const... yes
updating cache ./config.cache
creating ./config.status
creating lib/Makefile
creating src/Makefile
creating Makefile
```

To have better control of what *configure* generates, some options may be added by the way of the command line or environment variables. Example:

```
$ ./configure --with-gcc --prefix=/opt/GNU
```

or (with *bash*):

```
$ export CC='which gcc'
$ export CFLAGS=-O2
$ ./configure --with-gcc
```

or:

```
$ CC=gcc CFLAGS=-O2 ./configure
```

12.3.1.3. What if... it does not work?

Typically, it is an error that looks like `configure: error: Cannot find library guile` (most of the errors of the `configure` script look like this).

This means that the `configure` script was not able to find a library (the `guile` library in the example). The principle is that the `configure` script compiles a short test program, which uses this library. If it does not succeed in compiling this program, it will not be able to compile the software. Then an error occurs.

- Look for the reason of the error by looking at the end of the `config.log` file, which contains a track of all the steps of the configuration. The `C` compiler is clear enough with its error messages. This will usually help you in solving the problem.
- Check that the said library is properly installed. If not, install it (from the sources or a compiled binary file) and run `configure` again. An efficient way to check it is to search for the file that contains the symbols of the library; which is always `lib<name>.so`. For instance,

```
$ find / -name 'libguile*'

```

or else:

```
$ locate libguile

```

- Check that the library is accessible by the compiler. That means it is in a directory among: `/usr/lib` , `/lib` , `/usr/X11R6/lib` (or among those specified by the environment variable `LD_LIBRARY_PATH`, explained *What if... it does not work?*, page 72 number 5.b. Check that this file is a library by typing `file libguile.so`.
- Check that the headers corresponding to the library are installed in the right place (usually `/usr/include` or `/usr/local/include` or `/usr/X11R6/include`). If you do not know which headers you need, check that you have installed the development version of the required library (for instance, `libgtk+2.0-devel` instead of `libgtk+2.0`). The development version of the library provides the “include” files necessary for the compilation of software using this library.
- Check that you have enough space on your disk (the `configure` script needs some space for temporary files). Use the command `df -h` to display the partitions of your system, and note the full or nearly full partitions.

If you do not understand the error message stored in the `config.log` file, do not hesitate to ask for help from the free software community (see section *Technical support*, page 77).

Furthermore, check whether `configure` answers by 100% of No or whether it answers No while you are sure that a library exists. For instance, it would be very strange that there is no curses library on your system). In that case, the `LD_LIBRARY_PATH` variable is probably wrong!

12.3.2. imake

imake allows you to configure free software by creating a `Makefile` file from simple rules. These rules determine which files need to be compiled to build the binary file, and *imake* generates the corresponding `Makefile`. These rules are specified in a file named `Imakefile`.

The interesting thing about *imake* is that it uses information that is *site* (architecture-dependent). It is quite handy for applications using *X Window System*. But *imake* is also used for many other applications.

The easiest use of *imake* is to go into the main directory of the decompressed archive, and then to run the `xmkmf` script, which calls the *imake* program:

```
$ xmkmf -a
imake -DUseInstalled -I/usr/X11R6/lib/X11/config
make Makefiles

```

If the site is not correctly installed, recompile and install *X11R6*!

12.3.3. Various shell scripts

Read the `INSTALL` or `README` files for more information. Usually, you have to run a file called `install.sh` or `configure.sh`. Then, either the installation script is non-interactive (and determines itself what it needs) or it asks you information on your system (paths, for instance).

If you can not manage to determine the file you must run, you can type `./` (under *bash*), and then press twice the **TAB** key (tabulation key). *bash* automatically (in its default configuration) completes by a possible executable file from the directory (and therefore, a possible configuration script). If several files may be executed, it gives you a list. You just have to choose the right file.

A particular case is the installation of *perl* modules (but not only). The installation of such modules is made by the execution of a configuration script, which is written in *perl*. The command to execute is usually:

```
$ perl Makefile.PL
```

12.3.4. Alternatives

Some free software distributions are badly organized, especially during the first stages of development (but the user is warned!). They sometimes require you to change “by hand” some configuration files. Usually, these files are a `Makefile` file (see section *make*, page 71) and a `config.h` file (this name is only conventional).

I advise against these manipulations except for users who really do know what they are doing. This requires real knowledge and some motivation to succeed, but practice makes perfect.

12.4. Compilation

Now that the software is correctly configured, all that remains is for it to be compiled. This stage is usually easy, and does not pose serious problems.

12.4.1. make

The favorite tool of the free software community to compile sources is *make*. It has two advantages:

- The developer saves time, because it allows him to efficiently manage the compilation of his project,
- The end-user can compile and install the software in a few command lines, even if he has no preliminary knowledge of development.

Actions that must be executed to obtain a compiled version of the sources are stored in a file often named `Makefile` or `GNUMakefile`. Actually, when *make* is called, it reads this file – if it exists – in the current directory. If not, the file may be specified by using the option `-f` with *make*.

12.4.2. Rules

make operates in accordance with a system of *dependencies*, so compiling a binary file (“*target*”) requires going through several stages (“dependencies”). For instance, to create the (imaginary) `g1loq` binary file, the `main.o` and `init.o` object files (intermediate files of the compilation) must be compiled and then linked. These object files are also targets, whose dependencies are the source files.

This text is only a minimal introduction to survive in the merciless world of *make*. If you want to learn more, I advise you to go to the web site of **APRIL** (<http://www.april.org/groupe/doc/>), where you can find more detailed documentation about *make*. For an exhaustive documentation, refer to **Managing Projects with Make**, 2nd edition, O'Reilly, by Andrew Oram and Steve Talbott.

12.4.3. Go, go, go!

Usually, the use of `make` follows several conventions. For instance:

- `make` without argument just executes the compilation of the program, without installation.
- `make install` compiles the program (but not always), and then installs the required files at the right place in the file system. Some files are not always correctly installed (`man`, `info`), they might have been copied by the user himself. Sometimes, `make install` has to be executed again in sub-directories. Usually, this happens with modules developed by third parties.
- `make clean` clears all the temporary files created by the compilation, and also the executable file in most cases.

The first stage is to compile the program, and therefore to type (imaginary example):

```
$ make
gcc -c glloq.c -o glloq.o
gcc -c init.c -o init.o
gcc -c main.c -o main.o
gcc -lgtk -lgdk -glib -lXext -lX11 -lm glloq.o init.o main.o -o glloq
```

Excellent, the binary file is correctly compiled. We are ready to go to the next stage, which is the installation of the files of the distribution (binary files, data files, etc). See section *Installation*, page 76.

12.4.4. Explanations

If you are curious enough to look in the `Makefile` file, you will find known commands (`rm`, `mv`, `cp`, etc), but also strange strings, looking like `$(CFLAGS)`.

They are *variables* which are strings that are usually set at the beginning of the `Makefile` file, and then replaced by the value they are associated with. It is quite useful when you want to use the same compilation options several times in a row.

For instance, to print the string “foo” on the screen using `make all`:

```
TEST = foo
all:
    echo $(TEST)
```

Most of the time, the following variables are set:

1. `CC`: This is the compiler. Usually, it is `cc`, which is in most of free systems synonymous with `gcc`. When in doubt, put here `gcc`.
2. `LD`: This is the program used to ensure the final compilation stage (see section *The four steps of compilation*, page 65). By default, this is `ld`.
3. `CFLAGS`: These are the additional arguments that are given to the compiler during the first compilation stages. Among them:
 - `-I<path>`: Specifies to the compiler where to search for some additional headers (eg: `-I/usr/X11R6/include` allows inclusion of the header files that are in directory `/usr/X11R6/include`).
 - `-D<symbol>`: Defines an additional symbol, useful for programs whose compilation depends on the defined symbols (ex: use the `string.h` file if `HAVE_STRING_H` is defined).

There are often compilation lines like:

```
$(CC) $(CFLAGS) -c foo.c -o foo.o
```

4. `LDFLAGS` (or `LFLAGS`): These are arguments used during the final compilation stage. Among them:
 - `-L<path>`: Specifies an additional path to search for libraries (eg: `-L/usr/X11R6/lib`).
 - `-l<library>`: Specifies an additional library to use during the final compilation stage.

12.4.5. What if... it does not work?

Do not panic, it can happen to anyone. Among the most common causes:

1. `gllq.c:16: decl.h: No such file or directory`

The compiler did not manage to find the corresponding header. Yet, the software configuration step should have anticipated this error. Here is how to solve this problem:

- Check that the header really exists on the disk in one of the following directories: `/usr/include`, `/usr/local/include`, `/usr/X11R6/include` or one of their sub-directories. If not, look for it on the whole disk (with `find` or `locate`), and if you still do not find it, check that you have installed the library corresponding to this header. You can find examples of the `find` and `locate` commands in their respective manual pages.
- Check that the header is really readable (type `less <path>/<file>.h` to test this)
- If it is in a directory like `/usr/local/include` or `/usr/X11R6/include`, you sometimes have to add a new argument to the compiler. Open the corresponding `Makefile` (be careful to open the right file, those in the directory where the compilation fails ⁴) with your favorite text editor (*Emacs*, *Vi*, etc). Look for the faulty line, and add the string `-I<path>` – where `<path>` is the path where the header in question can be found – just after the call of the compiler (`gcc`, or sometimes `$(CC)`). If you do not know where to add this option, add it at the beginning of the file, after `CFLAGS=<something>` or after `CC=<something>`.
- Launch `make` again, and if it still does not work, check that this option (see the previous point) is added during compilation on the faulty line.
- If it still does not work, call for help from your local guru or call for help from the free software community to solve your problem (see section *Technical support*, page 77).

2. `gllq.c:28: 'struct foo' undeclared (first use this function)`

The structures are special data types that all programs use. A lot of them are defined by the system in headers. That means the problem is certainly caused by a missing or misused header. The correct procedure for solving the problem is:

- try to check whether the structure in question is defined by the program or by the system. A solution is to use the command `grep` in order to see whether the structure is defined in one of the headers.

For instance, when you are in the root of the distribution:

```
$ find . -name '*.h' | xargs grep 'struct foo' | less
```

Many lines may appear on the screen (each time that a function using this type of structure is defined for instance). If it exists, pick out the line where the structure is defined by looking at the header file obtained by the use of `grep`.

The definition of a structure is:

```
struct foo {
    <contents of the structure>
};
```

Check if it corresponds with what you have. If so, this means that the header is not included in the faulty `.c` file. There are two solutions:

- add the line `#include "<filename>.h"` at the beginning of the faulty `.c` file.
- or copy-paste the definition of the structure at the beginning of this file (it is not really neat, but at least it usually works).
- If not, do the same thing with the system header files (which are usually in directories `/usr/include`, `/usr/X11R6/include`, or `/usr/local/include`). But this time, use the line `#include <<filename>.h>`.

4. Analyze the error message returned by `make`. Normally, the last lines should contain a directory (a message like `make[1]: Leaving directory '/home/benj/Project/foo'`). Pick out the one with the highest number. To check that it is the good one, go to that directory and execute `make` again to obtain the same error.

- If this structure still does not exist, try to find out which library (i.e. set of functions put together in a single package) it should be defined in (look in the `INSTALL` or `README` file to see which libraries are used by the program and their required versions). If the version that the program needs is not the one installed on your system, you will need to update this library.
- If it still does not work, check that the program properly works with your architecture (some programs have not been ported yet on all the *UNIX* systems). Check also that you have correctly configured the program (when `configure` ran, for instance) for your architecture.

3. parse error

This is a problem that is quite complicated to solve, because it often is an error that appears at a certain line, but after the compiler has met it. Sometimes, it is simply a data type that is not defined. If you meet an error message like:

```
main.c:1: parse error before 'glloq_t'
main.c:1: warning: data definition has no type or storage class
```

then the problem is that the `glloq_t` type is not defined. The solution to solve the problem is more or less the same as that in the previous problem.



there may be a parse error in the old curses libraries if my memory serves me right.

4. no space left on device

This problem is easy to solve: there is not enough space on the disk to generate a binary file from the source file. The solution consists of making free space on the partition that contains the install directory (delete temporary files or sources, uninstall any programs you do not use). If you decompressed it in `/tmp`, rather than in `/usr/local/src`, which avoids needlessly saturating the `/tmp` partition. Check whether there are `core>` files on your disk. If so, delete them or make them get deleted if they belong to another user.

5. /usr/bin/ld: cannot open -lglloq: No such file or directory

That clearly means that the `ld` program (used by `gcc` during the last compilation stage) does not manage to find a library. To include a library, `ld` searches for a file whose name is in the arguments of type `-l<library>`. This file is `lib<library>.so`. If `ld` does not manage to find it, it produces an error message. To solve the problem, follow the steps below:

- Check that the file exists on the hard disk by using the `locate` command. Usually, the graphic libraries can be found in `/usr/X11R6/lib`. For instance:

```
$ locate libglloq
```

If the search is unrewarding, you can make a search with the `find` command (eg: `find /usr -name libglloq.so*`). If you still cannot find the library, you will have to install it.

- Once the library is located, check that it is accessible by `ld`: the `/etc/ld.so.conf` file specifies where to find these libraries. Add the incriminate directory at the end (you may have to reboot your computer for this to be taken into account). You also can add this directory by changing the contents of the environment variable `LD_LIBRARY_PATH`. For instance, if the directory to add is `/usr/X11R6/lib`, type:

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/usr/X11R6/lib
```

(if your shell is *bash*).

- If it still does not work, check that the library format is an executable file (or ELF) with the `file` command). If it is a symbolic link, check that the link is good and does not point at a non-existent file (for instance, with `nm libglloq.so`). The permissions may be wrong (if you use an account other than `root` and if the library is protected against reading, for example).

6. `glloq.c(.text+0x34): undefined reference to 'glloq_init'`

It is a problem of a symbol that was not solved during the last compilation stage. Usually, it is a library problem. There may be several causes:

- the first thing to do is to find out whether the symbol is **supposed** to be in a library. For instance, if it is a symbol beginning by `gtk`, it belongs to the `gtk` library. If the name of the library is easily identifiable (`froblicate_foobar`), you may list the symbols of a library with the `nm` command. For example,

```
$ nm libglloq.so
0000000000109df0 d glloq_message_func
000000000010a984 b glloq_msg
000000000008a58 t glloq_nearest_pow
0000000000109dd8 d glloq_free_list
0000000000109cf8 d glloq_mem_chunk
```

Adding the `-o` option to `nm` allows you to print the library name on each line, which makes the search easier. Let's imagine that we are searching for the symbol `bulgroz_max`, a crude solution is to make a search like:

```
$ nm /usr/lib/lib*.so | grep bulgroz_max
$ nm /usr/X11R6/lib/lib*.so | grep bulgroz_max
$ nm /usr/local/lib/lib*.so | grep bulgroz_max
/usr/local/lib/libfroblicate.so:000000000004d848 T bulgroz_max
```

Wonderful! The symbol `bulgroz_max` is defined in the `froblicate` library (the capital letter `T` is before its name). Then, you only have to add the string `-lfroblicate` in the compilation line by editing the `Makefile` file: add it at the end of the line where `LD_FLAGS` or `LF_FLAGS` (or `CC` at worst) are defined, or on the line corresponding to the creation of the final binary file.

- the compilation is being made with a version of the library which is not the one allowed for by the software. Read the `README` or `INSTALL` files of the distribution to see which version must be used.
- not all the object files of the distribution are correctly linked. The file where this function is defined is lacking. Type `nm -o *.o` to know which one it is and add the corresponding `.o` file on the compilation line if it is missing.
- the problem function or variable may be non-existent. Try to delete it: edit the problem source file (its name is specified at the beginning of the error message). It is a desperate solution whose consequence will certainly be a chaotic execution of the program with a (*segfault* at startup, etc).

7. Segmentation fault (core dumped)

Sometimes, the compiler hangs immediately and produces this error message. I have no advise except suggesting that you install a more recent version of your compiler.

8. no space on /tmp

Compilation needs temporary workspace during the different stages; if it does not have space, it fails. So, you may have to clean the partition, but be careful some programs being executed (*X* server, pipes, etc) can hang if some files are deleted. You must know what you are doing! If `/tmp` is part of a partition that does not only contain it (for example the root), search and delete some possible core files.

9. make/configure in infinite recursion

It is often a problem of time in your system. Indeed, `make` needs to know the date in the computer and the date of the files it checks. It compares the dates and uses the result to know whether the target is more recent than the dependence.

Some date problems may cause `make` to endlessly build itself (or to build and build again a sub-tree in infinite recursion). In such a case, the use of `touch` (whose use here is to set the files in question to the current time) usually solves the problem.

For instance:

```
$ touch *
```

Or also (cruder, but efficient):

```
$ find . | xargs touch
```

12.5. Installation

12.5.1. With make

Now that all is compiled, you have to copy the built files to an appropriate place (usually in one of the sub-directories of `/usr/local`).

`make` can usually perform this task. A special target is the target `install`. So, using `make install` carries out the installation of the required files.

Usually, the procedure is described in the `INSTALL` or `README` file. But sometimes, the developer has forgotten to provide one. In that case, you must install everything by yourself.

Copy then:

- The executable files (programs) into the `/usr/local/bin` directory
- The libraries (`lib*.so` files) into the `/usr/local/lib` directory
- The headers (`*.h` files) into the `/usr/local/include` directory (be careful not to delete the originals).
- The data files usually go in `/usr/local/share`. If you do not know the installation procedure, you can try to run the programs without copying the data files, and to put them at the right place when it asks you for them (in an error message like `Cannot open /usr/local/share/gllq/data.db` for example).
- The documentation is a little bit different:
 - The `man` files are usually put in one of the sub-directories of `/usr/local/man`. Usually, these files are in `troff` (or `groff`) format, and their extension is a figure. Their name is the name of a command (for instance, `echo.1`). If the figure is `n`, copy the file in `/usr/local/man/man<n>`.
 - The `info` files are put in the directory `/usr/info` or `/usr/local/info`

You are finished! Congratulations! You now are ready to compile an entire operating system!

12.5.2. Problems

If you have just installed free software, *GNU tar* for instance, and if, when you execute it, another program is started or it does not work like it did when you tested it directly from the `src` directory, it is a `PATH` problem, which finds the programs in a directory before the one where you have installed the new software. Check by executing type `-a <program>`.

The solution is to put the installation directory higher in the `PATH` and/or to delete/rename the files that were executed when they were not asked for, and/or rename your new programs (into `gtar` in this example) so that there is no more confusion.

You can also make an alias if the shell allows it (for instance, say that `tar` means `/usr/local/bin/gtar`).

12.6. Support

12.6.1. Documentation

Several documentation sources:

- *HOWTOs*, short documents on precise points (usually far from what we need here, but sometimes useful). Look on your disk in `/usr/share/doc/HOWTO` (not always, they are sometimes elsewhere; check that out with the command `locate HOWTO`),
- The manual pages. Type `man <command>` to get documentation on the command `<command>`,
- Specialized literature. Several large publishers have begun publishing books about free systems (especially on *GNU/Linux*). It is often useful if you are a beginner and if you do not understand all the terms of the present documentation.

12.6.2. Technical support

If you have bought an “official” **Mandrake Linux** distribution, you can ask the technical support staff for information on your system.

You can also rely on help from the free software community:

- *newsgroups* (on *Usenet*) `comp.os.linux.*` (`news:comp.os.linux.*`) answer all the questions about *GNU/Linux*. Newsgroups matching `comp.os.bsd.*` deal with BSD systems. There may be other newsgroups dealing with other *UNIX* systems. Remember to read them for some time prior to writing to them.
- Several associations or groups of enthusiasts in the free software community offer voluntary support. The best way to find the ones closest to you, is to check out the lists on specialized web sites, or to read the relevant newsgroups for a while.
- Several *IRC channels* offer a real time (but blind) assistance by *gurus*. See for instance the `#linux` channel on most of the IRC network, or `#linuxhelp` on *IRCNET*.
- As a last resort, ask the developer of the software (if he mentioned his name and his *email* address in a file of the distribution) if you are sure that you have found a bug (which may be due only to your architecture, but after all, free software is supposed to be portable).

12.6.3. How to find free software

To find free software, a lot of links may help you:

- the huge FTP site `sunsite.unc.edu` (`sunsite.unc.edu`) or one of its mirrors
- the following web sites make a catalog of many free software that can be used on *UNIX* platforms (but one can also find proprietary software on these):
 - FreshMeat (<http://www.freshmeat.net/>) is probably the most complete site,
 - Linux France (<http://www.linux-france.org/>) contains a lot of links to software working with *GNU/Linux*. Most of them work of course with other free *UNIX* platforms,
 - GNU Software (<http://www.gnu.org/software/>) for an exhaustive list of all of GNU software. Of course, all of them are free and most are licensed under the GPL,
 - SourceForge.net (<http://sourceforge.net/>) is the world’s largest Open Source software development web site, with the largest repository of Open Source code and applications available on the Internet.
- you can also perform a search with a search engine like Google/ (<http://www.google.com/>) and Lycos/ (<http://www.lycos.com/>) and make a request like: `+<software> +download` or `"download software"`.

12.7. Acknowledgments

- Proof-reading and disagreeable comments (and in alphabetical order): Sébastien Blondeel, Mathieu Bois, Xavier Renault and Kamel Sehil.
- *Beta-testing*: Laurent Bassaler
- English translation: Fanny Drieu English editing: Hoyt Duff

Chapter 13. Compiling And Installing New Kernels

Along with filesystem mounting and building from sources, compiling the kernel is undoubtedly the subject which causes the most problems for beginners. Compiling a new kernel is not generally necessary, since the kernel installed by **Mandrake Linux** contains support for a significant number of devices (in fact, more devices than you will ever need or even think of), as well as a set of trusted patches and so on. But...

It may be that you want to do it, for no other reason than to see “what it does”. Apart from making your PC and your coffee machine work a bit harder than usual, not a lot. The reasons why you should want to compile your own kernel range from deactivating an option to rebuilding a brand new experimental kernel. Anyway, the aim of this chapter is to ensure that your coffee machine still works after compilation.

There are other valid reasons for recompiling the kernel. For example, you have read that the kernel you are using has a security *bug*, which is fixed in a more recent version, or a new kernel includes support for a device you need. Of course, in these cases, you have the choice of waiting for binary upgrades, but updating the kernel sources and recompiling the new kernel yourself makes for a faster solution.

Whatever you do, stock up with coffee.

13.1. Where to Find Kernel Sources

You can basically get the sources from two places:

1. **Official Mandrake Linux Kernel.** In the SRPMS directory of any of the Cooker mirrors (<http://www.MandrakeLinux.com/en/cookerdevelopment.php3>), you will find the following packages:

kernel-2.4.??-?mdk-?-?mdk.src.rpm

The kernel sources for compiling the kernel used in the distribution. It is highly modified for more additional functionalities.

kernel-linus2.4-2.4.??-?mdk.src.rpm

The stock kernel as published by the maintainer of *GNU/Linux* kernel.

If you choose this option (recommended), just download the source RPM, install it (as root) and jump to *Configuring The Kernel*, page 80.

2. **The Official Linux Kernel Repository.** The main kernel source host site is <ftp.kernel.org> (<ftp://ftp.kernel.org>), but there are a large number of mirrors, all named <ftp.xx.kernel.org> (<ftp://ftp.xx.kernel.org>), where xx (xx) represents the ISO country code. Following the official announcement of the availability of the kernel, you should allow at least two hours for all the mirrors to be updated.

On all of these FTP servers, the kernel sources are in the `/pub/linux/kernel` directory. Next, go to the directory with the series that interests you: it will undoubtedly be v2.4. Nothing prevents you from trying the 2.5 version, but remember that these are experimental kernels. The file containing the kernel sources is called `linux-<kernel.version>.tar.bz2`, e.g. `linux-2.4.20.tar.bz2`.

You can also apply patches to kernel sources in order to upgrade them incrementally: thus, if you already have kernel sources version 2.4.20 and want to upgrade to kernel 2.4.22, you do not need to download the whole 2.4.22 source, you can simply download the *patches* `patch-2.4.21.bz2` and `patch-2.4.22.bz2`. As a general rule, this is a good idea, since sources currently take up more than 26 MB.

13.2. Unpacking Sources, Patching The Kernel (if Necessary)

Kernel sources should be placed in `/usr/src`. So you should go into this directory then unpack the sources there:

```
$ cd /usr/src
$ mv linux linux.old
$ tar xjf /path/to/linux-2.4.20.tar.bz2
```

The command `mv linux linux.old` is required: this is because you may already have sources of another version of the kernel. This command will ensure that you do not overwrite them. Once the archive is unpacked, you have a `linux-<version>` directory (where `<version>` is the version of the kernel) with the new kernel's sources. You can make a link (`ln -s linux-<version> linux`) for commodity's sake.

Now, the patches. We will assume that you do want *to patch* from version 2.4.20 to 2.4.22 and have downloaded the patches needed to do this: go to the newly created `linux` directory, then apply the patches:

```
$ cd linux
$ bzcat /path/to/patch-2.4.21.bz2 | patch -p1
$ bzcat /path/to/patch-2.4.22.bz2 | patch -p1
$ cd ..
```

Generally speaking, moving from a version 2.4.x to a version 2.4.y requires you to apply all the patches numbered 2.4.x+1, 2.4.x+2, ..., 2.4.y in this order. To revert from 2.4.y to 2.4.x, repeat exactly the same procedure but applying the patches in reverse order and with option `-R` from `patch` (`R` stands for *Reverse*). So, to go back from kernel 2.4.22 to kernel 2.4.20, you would do:

```
$ bzcat /path/to/patch-2.4.22.bz2 | patch -p1 -R
$ bzcat /path/to/patch-2.4.21.bz2 | patch -p1 -R
```



If you wish to test if a patch will correctly apply before actually applying it, add the `--dry-try` option to the `patch` command.

Next, for the sake of clarity (and so you know where you are), you can rename `linux` to reflect the kernel version and create a symbolic link:

```
$ mv linux linux-2.4.22
$ ln -s linux-2.4.22 linux
```

It is now time to move on to configuration. For this, you have to be in the source directory:

```
$ cd linux
```

13.3. Configuring The Kernel

To start, go into the `/usr/src/linux` directory.

First, a little trick: you can, if you want, customize the version of your kernel. The kernel version is determined by the four first lines of the `Makefile`:

```
$ head -4 Makefile
VERSION = 2
PATCHLEVEL = 4
SUBLEVEL = 22
EXTRAVERSION =
```

Further on in the `Makefile`, you can see that the kernel version is built as:

```
KERNELRELEASE=$(VERSION) . $(PATCHLEVEL) . $(SUBLEVEL) $(EXTRAVERSION)
```

All you have to do is modify one of these fields in order to change your version. Preferably, you will only change `EXTRAVERSION`. Say you set it to `-foo`, for example. Your new kernel version will then become 2.4.22-foo. Do not hesitate to change this field each time you recompile a new kernel with different versions, so that you can test different options while keeping old tries.

Now, on to configuration. You can choose between:

- `make xconfig` for a graphical interface;

- `make menuconfig` for an interface based on ncurses;
- `make config` for the most rudimentary interface, line by line, section by section;
- `make oldconfig` the same as above, but based on your former configuration. See *Saving, Reusing Your Kernel Configuration Files*, page 81.

You will go through the configuration section by section, but you can skip sections and jump to the ones that interest you if you are using `menuconfig` or `xconfig`. The options are **y** for Yes (functionality hard-compiled into the kernel), **m** for Module (functionality compiled as a module), or **n** for No (do not include it in the kernel).

Both `make xconfig` and `make menuconfig` have the options bundled in hierarchical groups. For example, `Processor family` goes under `Processor type` and `features`.

For `xconfig`, the button `Main Menu` is used to come back to the main menu when in a hierarchical group; `Next` goes to the next group of options; and `Prev` returns to the previous group. For `menuconfig`, use the `Enter` key to select a section, and switch options with **y**, **m** or **n** to change the options status, or else, press the `Enter` key and make your choice for the multiple choice options. `Exit` will take you out of a section or out of configuration if you are in the main menu. And there is also `Help`.

We are not going to enumerate all options here, as there are several hundreds of them. Furthermore, if you have reached this chapter, you probably know what you are doing anyway. So you are left to browse through the kernel configuration and set/unset whichever options you see fit. However, here is some advice to avoid ending up with an unusable kernel:

1. unless you use an initial ramdisk, **never** compile the drivers necessary to mount your root filesystem (hardware drivers and filesystem drivers) as modules! And if you use an initial ramdisk, say `Y` to `ext2FS` support, as this is the filesystem used for ramdisks. You will also need the `initrd` support;
2. if you have network cards on your system, compile their drivers as modules. Hence, you can define which card will be the first one, which will be the second, and so on, by putting appropriate aliases in `/etc/modules.conf`. If you compile the drivers into the kernel, the order in which they will be loaded will depend on the linking order, which may not be the order you want;
3. and finally: if you don't know what an option is about, read the help! If the help text still doesn't inspire you, just leave the option as it was. (for `config` and `oldconfig` targets, press the `?` key to access the help).

You may also consult the file `/usr/src/linux/Documentation/Configure.help` which gives the help text for every option in order of appearance. On its header, you will also find links to many translations.

Et voilà ! Configuration is finally over. Save your configuration and quit.

13.4. Saving, Reusing Your Kernel Configuration Files

The kernel configuration is saved in the `/usr/src/linux/.config` file. There's a backup for it in `/boot/config-<version>`, it's good to keep it as a reference. But also save your own configurations for different kernels, as this is just a matter of giving different names to configuration files.

One possibility is to name configuration files after the kernel version. Say you modified your kernel version as shown *Configuring The Kernel*, page 80, then you can do:

```
$ cp .config /root/config-2.4.22-foo
```

If you decide to upgrade to 2.4.24 (for example), you will be able to reuse this file, as the differences between the configuration of these two kernels will be very small. Just use the backup copy:

```
$ cp /root/config-2.4.22-foo .config
```

But copying back the file doesn't mean that the kernel is ready to be compiled just yet. You have to invoke `make menuconfig` (or whatever else you chose to use) again, because some files needed in order for the compilation to succeed are created and/or modified by these commands.

However, apart from the chore of going through all the menus again, you can possibly miss some interesting new option(s). You can avoid this by using `make oldconfig`. It has two advantages:

1. it's fast;

2. if a new option appears in the kernel and wasn't present in your configuration file, it will stop and wait for you to enter your choice.



After you have copied your `.config` to the root home, as proposed above, run `make mrproper`. It will ensure nothing remains from the old configuration and you will get a clean kernel.

Next, time for compilation.

13.5. Compiling Kernel And Modules, Installing The Beast

Small point to begin with: if you are recompiling a kernel with exactly the same version as the one already present on your system, the old modules must be deleted first. For example, if you are recompiling 2.4.22, you must delete the `/lib/modules/2.4.22` directory.

Compiling the kernel and modules, and then installing modules, is done with the following lines:

```
make dep
make clean bzImage modules
make modules_install install
```

A little vocabulary: `dep`, `bzImage`, etc., as well as `oldconfig` and others which we used above, are called **targets**. If you specify several targets to make as shown above, they will be executed in their order of appearance. But if one target fails, `make` won't go any further¹.

Let us look at the different targets and see what they do:

- `dep`: this computes the dependencies between the different source files. It is necessary to do so each time you change your configuration, otherwise some files may not be built and the compilation will fail;
- `bzImage`: this builds the kernel. Note that this target is only valid for *Intel* processors. This target also generates the `System.map` for this kernel. We will see later what this file is used for;
- `modules`: this target will generate modules for the kernel you have just built. If you have chosen not to have modules, this target will do nothing;
- `modules_install`: this will install modules. By default, modules will be installed in the `/lib/modules/<kernel-version>` directory. This target also computes module dependencies (unlike in 2.2.x);
- `install`: this last target will finally copy the kernel and modules to the right places and modify the boot loader's configurations in order for the new kernel to be available at boot time. Do not use it if you prefer to perform a manual installation as described in *Installing The New Kernel Manually*, page 82.

At this point, everything is now compiled and correctly installed, ready to be tested! Just reboot your machine and choose the new kernel in the boot menu. Note that the old kernel remains available so that you can use it if you experience problems with the new one. However, you can choose to manually install the kernel and change the boot menus by hand. We will explain that in the next section.



The old `zImage` target is now obsolete, it is deprecated, and you shouldn't use it anymore.

1. In this case, if it fails, it means that there is a bug in the kernel... If this is the case, please report it!

13.6. Installing The New Kernel Manually

The kernel is located in `arch/i386/boot/bzImage` (or `zImage` if you chose to make `zImage` instead). The standard directory in which kernels are installed is `/boot`. You also need to copy the `System.map` file to ensure that some programs (top is just one example) will work correctly. Good practice again: name these files after the kernel version. Let us assume that your kernel version is 2.4.22-foo. The sequence of commands you will have to type is:

```
$ cp arch/i386/boot/bzImage /boot/vmlinuz-2.4.22-foo
$ cp System.map /boot/System.map-2.4.22-foo
```

Now you need to tell the boot loader about your new kernel. There are two possibilities: *grub* or *LILO*. Note that **Mandrake Linux** is configured with *LILO* by default.

13.6.1. Updating LILO

The simplest way of updating *LILO* is to use *drakboot* (see chapter Change Your Boot-up Configuration in the *Starter Guide*). Alternatively, you can manually edit the configuration file as follows.

The *LILO* configuration file is `/etc/lilo.conf`. This is what a typical `lilo.conf` looks like:

```
boot=/dev/hda
map=/boot/map
install=/boot/boot.b
vga=normal
default=linux
keytable=/boot/fr-latin1.klt
lba32
prompt
timeout=50
message=/boot/message
image=/boot/vmlinuz-2.4.20-17mdk
    label=linux
    root=/dev/hda1
    read-only
    append="devfs=mount"
    vga=788
other=/dev/hda2
    label=dos
    table=/dev/hda
```

A `lilo.conf` file consists of a main section, followed by a section for each operating system. In the example of the file above, the main section is made up of the following directives:

```
boot=/dev/hda
map=/boot/map
install=/boot/boot.b
vga=normal
default=linux
keytable=/boot/fr-latin1.klt
lba32
prompt
timeout=50
message=/boot/message
```

The `boot=` directive tells *LILO* where to install its boot sector; in this case, it is the MBR (*Master Boot Record*) of the first IDE hard disk. If you want to make a *LILO* floppy disk, simply replace `/dev/hda` with `/dev/fd0`. The `prompt` directive asks *LILO* to show the menu on start-up. As a `timeout` is set, *LILO* will start the default image after 5 seconds (`timeout=50`). If you remove the `timeout` directive, *LILO* will wait until you have typed something.

Then comes a `linux` section:

```
image=/boot/vmlinuz-2.4.20-17mdk
    label=linux
    root=/dev/hda1
    read-only
    append="devfs=mount"
    vga=788
```

A section to boot a *GNU/Linux* kernel always starts with an `image=` directive, followed by the full path to a valid *GNU/Linux* kernel. Like any section, it contains a `label=` directive as a unique identifier, here `linux`. The `root=` directive tells *LILLO* which partition hosts the root filesystem for this kernel. It may be different in your configuration... The `read-only` directive tells *LILLO* that it should mount the root filesystem as read-only on start-up: if this directive is not there, you will get a warning message. The `append` line specifies options to pass to the kernel. Finally the `vga` parameter configures the framebuffer.

Then comes the *Windows* section:

```
other=/dev/hda2
    label=dos
    table=/dev/hda
```

In fact, a section beginning with `other=` is used by *LILLO* to start any operating system other than *GNU/Linux*: the argument of this directive is the location of this system's boot sector, and in this case, it is a *Windows* system. To find the boot sector, located at the beginning of the partition hosting this other system, *GNU/Linux* also needs to know the location of the partition table which will enable it to locate the partition in question. This is done through the `table=` directive. The `label=` directive, as with the `linux` section above, identifies the section.

Now, it's time we added a section for our new kernel. You can put this section anywhere behind the main section, but don't enclose it within another section. Here is what it can look like:

```
image=/boot/vmlinuz-2.4.22-foo
    label=foo
    root=/dev/hda1
    read-only
```

Of course, adapt it to your configuration! We took a different situation on purpose (not the same as the *grub* one showed above...)

If you compiled your kernel with the framebuffer, refer to the corresponding paragraph above concerning *grub*. The only difference is that the option is alone on a new line:

```
vga=0x315
```

So this is what our `lilo.conf` looks like after modification, decorated with a few additional comments (all the lines beginning with `#`), which will be ignored by *LILLO*:

```
#
# Main section
#
boot=/dev/hda
map=/boot/map
install=/boot/boot.b
# At boot, we want normal VGA. The framebuffer will switch resolutions by
# itself if we use it:
vga=normal
# Our boot message...
message=/boot/message
# What should be booted by default. Let's put our own kernel as the default:
default=foo
# Show prompt...
prompt
# ... wait 5 seconds
timeout=50
#
# Our new kernel: default image
#
image=/boot/vmlinuz-2.4.22-foo
    label=foo
    root=/dev/hda1
    read-only
# If the VESA framebuffer is used:
    vga=0x315
#
```



```
# The original kernel
#
image=/boot/vmlinuz-2.4.20-17mdk
    label=linux
    root=/dev/hda1
    read-only
#
# Windows Section
#
other=/dev/hda2
    label=dos
    table=/dev/hda
```

This could well be what your `lilo.conf` will look like... but remember, again, to adapt it to your own configuration.

Now that the file has been modified appropriately, but unlike *grub* which does not need it, you must tell *LILO* to change the boot sector:

```
$ lilo
Added foo *
Added linux
Added dos
$
```

In this way, you can compile as many kernels as you want, by adding as many sections as necessary. All you need to do now is restart your machine to test your new kernel.

13.6.2. Updating Grub

Obviously, retain the possibility of starting your current kernel! The simplest way of updating *grub* is to use *drakboot* (see chapter Change Your Boot-up Configuration in the *Starter Guide*). Alternatively, you can manually edit the configuration file as follows.

You need to edit the `/boot/grub/menu.lst` file. This is what a typical `menu.lst` looks like, after you have installed your **Mandrake Linux** distribution and before modification:

```
timeout 5
color black/cyan yellow/cyan
i18n (hd0,4)/boot/grub/messages
keytable (hd0,4)/boot/fr-latin1.klt
default 0

title linux
kernel (hd0,4)/boot/vmlinuz root=/dev/hda5

title failsafe
kernel (hd0,4)/boot/vmlinuz root=/dev/hda5 failsafe

title Windows
root (hd0,0)
makeactive
chainloader +1

title floppy
root (fd0)
chainloader +1
```

This file is made of two parts: the header with common options (the five first lines), and the images, each one corresponding to a different *GNU/Linux* kernel or another OS. `timeout 5` defines the time (in seconds) for which *grub* will wait for input before it loads the default image (this is defined by the `default 0` directive in common options, i.e. the first image in this case). The `keytable` directive, if present, defines where to find the keymap for your keyboard. In this example, this is a French layout. If none are present, the keyboard is assumed to be a plain QWERTY keyboard. All `hd(x,y)` which you can see refer to partition number *y* on disk number *x* as seen by the *BIOS*.

Then come the different images. In this example, four images are defined: `linux`, `failsafe`, `windows`, and `floppy`.

- The `linux` section starts by telling *grub* about the kernel which is to be loaded (`kernel hd(0,4)/boot/vmlinuz`), followed by the options to pass to the kernel. In this case, `root=/dev/hda5` will tell the kernel that the root filesystem is located on `/dev/hda5`. In fact, `/dev/hda5` is the equivalent of *grub*'s `hd(0,4)`, but nothing prevents the kernel from being on a different partition than the one containing the root filesystem;
- the `failsafe` section is very similar to the previous one, except that we will pass an argument to the kernel (`failsafe`) which tells it to enter “single” or “rescue” mode;
- the `windows` section tells *grub* to simply load the first partition's boot sector, which probably contains a *Windows* boot sector;
- the `floppy` section simply boots your system from the floppy disk in the first drive, whatever the system installed on it. It can be a *Windows* bootdisk, or even a *GNU/Linux* kernel on a floppy;



Depending on the security level you use on your system, some of the entries described here may be absent from your file.

Now to the point. We need to add another section to tell *grub* about our new kernel. In this example, it will be placed before the other entries, but nothing prevents you from putting it somewhere else:

```
title foo
kernel (hd0,4)/boot/vmlinuz-2.4.22-foo root=/dev/hda5
```

Don't forget to adapt the file to your configuration! The *GNU/Linux* root filesystem here is `/dev/hda5`, but it can be somewhere else on your system.

And that's it. Unlike *LILO*, as we will see below, there is nothing else to do. Just restart your computer and the new entry you just defined will appear. Just select it from the menu and your new kernel will boot.

If you compiled your kernel with the framebuffer, you will probably want to use it: in this case, you need to add a directive to the kernel which tells it what resolution you want to start in. The list of modes is available in the `/usr/src/linux/Documentation/fb/vesafb.txt` file (only in the case of the VESA framebuffer! Otherwise, refer to the corresponding file). For the 800x600 mode in 32 bits², the mode number is `0x315`, so you need to add the directive:

```
vga=0x315
```

and your entry now resembles:

```
title foo
kernel (hd0,4)/boot/vmlinuz-2.4.22-foo root=/dev/hda5 vga=0x315
```

For more information, please consult the info pages about *grub* (`info grub`).

2. 8 bits means 2^8 colors, i.e. 256; 16 bits means 2^{16} colors, i.e. 64k, i.e. 65536; in 24 bits as in 32 bits, color is coded on 24 bits, i.e. 2^{24} possible colors, in other words exactly 16M, or a bit more than 16 million.

Appendix A. The GNU General Public License

The following text is the GPL license that applies to most programs found in **Mandrake Linux** distributions.

Version 2, June 1991 Copyright (C) 1989, 1991 Free Software Foundation, Inc. 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

A.1. Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software – to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation’s software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps:

1. copyright the software, and
2. offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author’s protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors’ reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone’s free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

A.2. Terms and conditions for copying, distribution and modification

- 0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The “Program”, below, refers to any such program or work, and a “work based on the Program” means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term “modification”.) Each licensee is addressed as “you”.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only

if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

- 1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

- 2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
 1. You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
 2. You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
 3. If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

- 3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
 1. Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 2. Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 3. Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable.

However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

- 4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
- 5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
- 6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
- 7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

- 8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
- 9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

- 10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

- 11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
- 12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix B. GNU Free Documentation License

B.1. GNU Free Documentation License

Version 1.1, March 2000

Copyright (C) 2000 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other written document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you".

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (For example, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, whose contents can be viewed and edited directly and straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup has been designed to thwart or discourage subsequent modification by readers is not Transparent. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML designed for human modification. Opaque formats include PostScript, PDF, proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or proces-

sing tools are not generally available, and the machine-generated HTML produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies of the Document numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a publicly-accessible computer-network location containing a complete Transparent copy of the Document, free of added material, which the general network-using public has access to download anonymously at no charge using public-standard network protocols. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has less than five).
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.

- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section entitled "History", and its title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. In any section entitled "Acknowledgements" or "Dedications", preserve the section's title, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section as "Endorsements" or to conflict in title with any Invariant Section.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections entitled "History" in the various original documents, forming one section entitled "History"; likewise combine any sections entitled "Acknowledgements", and any sections entitled "Dedications". You must delete all sections entitled "Endorsements."

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, does not as a whole count as a Modified Version of the Document, provided no compilation copyright is claimed for the compilation. Such a compilation is called an "aggregate", and this License does not apply to the other self-contained works thus compiled with the Document, on account of their being thus compiled, if they are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one quarter of the entire aggregate, the Document's Cover Texts may be placed on covers that surround only the Document within the aggregate. Otherwise they must appear on covers around the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License provided that you also include the original English version of this License. In case of a disagreement between the translation and the original English version of this License, the original English version will prevail.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See Copyleft (<http://www.gnu.org/copyleft/>).

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

B.2. How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME. Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.1 or any later version published by the Free Software Foundation; with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have no Invariant Sections, write "with no Invariant Sections" instead of saying which ones are invariant. If you have no Front-Cover Texts, write "no Front-Cover Texts" instead of "Front-Cover Texts being LIST"; likewise for Back-Cover Texts.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

Appendix C. Glossary

APM

Advanced Power Management. A feature used by some *BIOS*es in order to make the machine enter a standby state after a given period of inactivity. On laptops, APM is also responsible for reporting the battery status and (if supported) the estimated remaining battery life.

ASCII

American Standard Code for Information Interchange. The standard code used for storing characters, including control characters, on a computer. Many 8-bit codes (such as ISO 8859-1, the Linux default character set) contain ASCII as their lower half.

See Also: .

BSD

Berkeley Software Distribution. A *UNIX* variant developed at the Berkeley University computing department. This version has always been considered more technically advanced than the others, and has brought many innovations to the computing world in general and to *UNIX* in particular.

CHAP

Challenge-Handshake Authentication Protocol: protocol used by ISPs to authenticate their clients. In this scheme, a value is sent to the client (the machine making the connection), which it uses to calculate a *hash* based on the value. The client sends the hash back to the server for comparison to the hash calculated by the server. This authentication method is different from PAP in that it re-authenticates on a periodic basis after the initial authentication.

See Also: PAP.

CIFS

Common Internet FileSystem The successor to the SMB file system, used on *DOS* systems.

DHCP

Dynamic Host Configuration Protocol. A protocol designed for machines on a local network to dynamically get an IP address from a DHCP server.

DMA

Direct Memory Access. A facility used on the *PC* architecture which allows for a peripheral to read or write from main memory without the help of the CPU. PCI peripherals use bus mastering and do not need DMA.

DNS

Domain Name System. The distributed name and address mechanism used in the Internet. This mechanism allows you to map a domain name to an IP address, allowing you to look up a site by domain name without knowing the IP address of the site. DNS also allows reverse lookup, letting you get a machine's IP address from its name.

DPMS

Display Power Management System. Protocol used by all modern monitors to manage power saving features. Monitors supporting these features are commonly called "green" monitors.

ELF

Executable and Linking Format. This is the binary format used by most *GNU/Linux* distributions.

ext2

short for the "Extended 2 file system". This is *GNU/Linux*'s native file system and has the characteristics of any *UNIX* file system: support for special files (character devices, symbolic links, etc), file permissions and ownership, and other features.

FAQ

Frequently Asked Questions. A document containing a series of questions and answers about a specific topic. Historically, FAQs appeared in newsgroups, but this sort of document now appears on various web sites, and even commercial products have FAQs. Generally, they are very good sources of information.

FAT

File Allocation Table. File system used by *DOS* and *Windows* .

FDDI

Fiber Distributed Digital Interface. A high-speed network physical layer, which uses optical fiber for communication. Mostly used on large networks, mainly because of its price. It is rarely seen as a means of connection between a PC and a network switch.

FHS

File system Hierarchy Standard. A document containing guidelines for a coherent file tree organization on *UNIX* systems. **Mandrake Linux** complies with this standard in most aspects.

FIFO

First In, First Out. A data structure or hardware buffer where items are taken out in the order they were put in. *UNIX* pipes are the most common examples of FIFO s.

FTP

File Transfer Protocol. This is the standard Internet protocol used to transfer files from one machine to another.

GFDL

The GNU Free Documentation License. The license that applies to all **Mandrake Linux** documentation.

GIF

Graphics Interchange Format. An image file format, widely used on the web. GIF images may be compressed or animated. Due to copyright problems it is a bad idea to use them, so the recommended solution is to replace them as much as possible by the PNG format.

GNU

GNU's Not Unix. The GNU project has been initiated by Richard Stallman at the beginning of the 1980s, and aimed at developing a free operating system ("free" as in "free speech"). Currently, all tools are there, except... the kernel. The GNU project kernel, *Hurd*, is not rock solid yet. *Linux* borrows, among others, two things from GNU: its *C* compiler, *gcc*, and its license, the GPL.

See Also: GPL.

GPL

General Public License. The license of the *GNU/Linux* kernel, it goes the opposite way of all proprietary licenses in that it gives no restriction as to copying, modifying and redistributing the software, as long as the source code is made available. The only restriction is that the persons to whom you redistribute it must also benefit from the same rights.

GUI

Graphical User Interface. Interface to a computer consisting of windows with menus, buttons, icons and so on. The vast majority prefer a GUI over a CLI (*Command Line Interface*) for ease of use, even though the latter is more versatile.

HTML

HyperText Markup Language. The language used to create web documents.

HTTP

HyperText Transfer Protocol. The protocol used to connect to web sites and retrieve HTML documents or files.

IDE

Integrated Drive Electronics. The most widely used bus on today's *PC* s for hard disks. An IDE bus can contain up to two devices, and the speed of the bus is limited by the device on the bus with the slower command queue (and not the slower transfer rate!).

See Also: ATAPI.

IP masquerading

This is a technique where a firewall is used to hide your computer's true IP address from the outside. Typically, any outside network connections you make through the firewall will inherit the firewall's IP address. This is useful in situations where you may have a fast Internet connection with only one IP address but wish to use more than one computer on your internal network.

IRC

Internet Relay Chat. One of the few Internet standards for live speech. It allows for channel creation, private talks and file exchange. It also allows servers to connect to each other, which is why several IRC networks exist today: **Undernet**, **DALnet**, **EFnet** to name a few.

IRC channels

are the “places” inside IRC servers where you can chat with other people. Channels are created in IRC servers and users join those channels so they can communicate with each other. Messages written on an channel are only visible to the people connected to that channel. Two or more users can create a “private” channel so they don’t get disturbed by other users. Channel names begin with a #.

ISA

Industry Standard Architecture. The very first bus used on *PC* s, it is slowly being abandoned in favor of the PCI bus. ISA is still commonly found on SCSI cards supplied with scanners, CD writers and some other older hardware.

ISDN

Integrated Services Digital Network. A set of communication standards for voice, digital network services and video. It has been designed to eventually replace the current phone system, known as PSTN (*Public Switched Telephone Network*) or POTS (*Plain Ole Telephone Service*). ISDN is known as a circuit switched data network.

ISO

International Standards Organization. A group of companies, consultants, universities and other sources which enumerates standards in various disciplines, including computing. The papers describing standards are numbered. The standard number iso9660, for example, describes the file system used on CD-ROMs.

ISP

Internet Service Provider. A company which sells Internet access to its customers, either over telephone lines or high-bandwidth circuits such dedicated T-1 circuits, DSL or cable modem.

JPEG

Joint Photographic Experts Group. Another very common image file format. JPEG is mostly suited for compressing real-world scenes, and does not work very well on non-realistic images.

LAN

Local Area Network. Generic name given to a network of machines connected to the same physical wire.

LDP

Linux Documentation Project. A nonprofit organization that maintains *GNU/Linux* documentation. It’s mostly known for documents like *HOWTO*s, but it also maintains FAQ s, and even a few books.

MBR

Master Boot Record. Name given to the first sector of a bootable hard drive. The MBR contains the code used to load the operating system into memory or a bootloader (such as *LILO*), and the partition table of that hard drive.

MIME

Multipurpose Internet Mail Extensions. A string of the form type/subtype describing the contents of a file attached in an e-mail. This allows MIME -aware mail clients to define actions depending on the type of the file.

MPEG

Moving Pictures Experts Group. An ISO committee which generates standards for video and audio compression. MPEG is also the name of their algorithms. Unfortunately, the license for this format is very restrictive, and as a consequence there are still no *Open Source* MPEG players...

NCP

NetWare Core Protocol. A protocol defined by **Novell** to access Novell NetWare file and print services.

NFS

Network FileSystem. A network file system created by **Sun Microsystems** in order to share files across a network in a transparent way.

NIC

Network Interface Controller. An adapter installed in a computer which provides a physical connection to a network, such as an *Ethernet* card.

NIS

Network Information System. NIS was also known as “Yellow Pages”, but **British Telecom** holds a copyright on this name. NIS is a protocol designed by **Sun Microsystems** in order to share common information across a NIS **domain**, which can consist of an entire LAN, or just a part of it. It can export password databases, service databases, groups information and more.

PAP

Password Authentication Protocol. A protocol used by many ISPs to authenticate their clients. In this scheme, the client (you) sends an identifier/password pair to the server, but none of the information is encrypted. See CHAP for the description of a more secure system.

See Also: CHAP.

PCI

Peripheral Components Interconnect. A bus created by **Intel** which today is the standard bus for *PC* and other architectures. It is the successor to ISA, and it offers numerous services: device identification, configuration information, IRQ sharing, bus mastering and more.

PCMCIA

Personal Computer Memory Card International Association. More and more commonly called “PC Card” for simplicity reasons, this is the standard for external cards attached to a laptop: modems, hard disks, memory cards, *Ethernet* cards, and more. The acronym is sometimes humorously expanded to *People Cannot Memorize Computer Industry Acronyms...*

PNG

Portable Network Graphics. Image file format created mainly for web use, it has been designed as a patent-free replacement for GIF and also has some additional features.

PnP

Plug’N’Play. First an add-on for ISA in order to add configuration information for devices, it has become a more widespread term which groups all devices able to report their configuration parameters. All PCI devices are Plug’N’Play.

POP

Post Office Protocol. One common protocol used for retrieving mail from an ISP. See IMAP for an example of another remote-access mail protocol.

PPP

Point to Point Protocol. This is the protocol used to send data over serial lines. It is commonly used to send IP packets to the Internet, but it can also be used with other protocols such as Novell’s IPX protocol.

RAID

Redundant Array of Independent Disks. A project initiated at the computing science department of Berkeley University, in which the storage of data is spread along an array of disks using different schemes. At first, this was implemented using floppy drives, which is why the acronym originally stood for *Redundant Array of Inexpensive Disks*.

RAM

Random Access Memory. Term used to identify a computer’s main memory. The “Random” here means that any part of the memory can be directly accessed.

RFC

Request For Comments. RFC s are the official Internet standard documents, published by the IETF (*Internet Engineering Task Force*). They describe all protocols, their usage, their requirements and so on. When you want to learn how a protocol works, pick up the corresponding RFC.

RPM

Red Hat Package Manager. A packaging format developed by **Red Hat** in order to create software packages, it is used in many *GNU/Linux* distributions, including **Mandrake Linux**.

SCSI

Small Computers System Interface. A bus with a high throughput designed to allow for several types of peripherals to be connected to it. Unlike IDE, a SCSI bus is not limited by the speed at which the peripherals accept commands. Only high-end machines integrate a SCSI bus directly on the motherboard, therefore most *PC* s need add-on cards.

SMB

Server Message Block. Protocol used by *Windows* machines (*9x* or *NT*) for file and printer sharing across a network.

See Also: CIFS.

SMTP

Simple Mail Transfer Protocol. This is the common protocol for transferring email. Mail Transfer Agents such as *sendmail* or *postfix* use SMTP. They are sometimes called SMTP servers.

SVGA

Super Video Graphics Array. The video display standard defined by VESA for the *PC* architecture. The resolution is 800x 600 x 16 colors.

TCP

Transmission Control Protocol. This is the most common reliable protocol that uses IP to transfer network packets. TCP adds the necessary checks on top of IP to make sure that packets are delivered. Unlike UDP, TCP works in connected mode, which means that two machines must establish a connection before exchanging data.

URL

Uniform Resource Locator. A string with a special format used to identify a resource on the Internet in a unique way. The resource can be a file, a server or other item. The syntax for a URL is `protocol://server.name[:port]/path/to/resource`.

When only a machine name is given and the protocol is `http://`, it defaults to retrieving the file `index.html` on the server.

VESA

Video Electronics Standards Association. An industry standards association aimed at the *PC* architecture. For example, it is the author of the SVGA standard.

WAN

Wide Area Network. This network, although similar to a LAN, connects computers on a network that are not physically connected to the same wires and are separated by a greater distance.

account

on a *UNIX* system, the combination of a name, a personal directory, a password and a *shell* which allows a person to connect to this system.

alias

a mechanism used in a *shell* in order to make it substitute one string for another before executing the command. You can see all aliases defined in the current session by typing `alias` at the prompt.

arp

Address Resolution Protocol. The Internet protocol used to dynamically map an Internet address to a physical (hardware) address on a local area network. This is limited to networks that support hardware broadcasting.

assembly language

is the programming language that is closest to the computer, which is why it's called a "low level" programming language. Assembly has the advantage of speed since assembly programs are written in terms of processor instructions so little or no translation is needed when generating executables. Its main disadvantage is that it is processor (or architecture) dependent. Writing complex programs is very time-consuming as well. So, assembly is the fastest programming language, but it isn't portable between architectures.

ATAPI

("AT Attachment Packet Interface") An extension to the ATA specification ("Advanced Technology Attachment", more commonly known as IDE, *Integrated Drive Electronics*) which provides additional commands to control CD-ROM drives and magnetic tape drives. IDE controllers equipped with this extension are also referred to as EIDE (*Enhanced IDE*) controllers.

ATM

This is an acronym for **Asynchronous Transfer Mode**. An ATM network packages data into standard size blocks (53 bytes: 48 for the data and 5 for the header) that it can convey efficiently from point to

point. ATM is a circuit switched packet network technology oriented towards high speed (multi-megabit) optical networks.

atomic

a set of operations is said to be atomic when they execute all at once and cannot be preempted.

background

in *shell* context, a process is running in the background if you can type commands that are captured by the process while it is running.

See Also: job, foreground.

backup

is a means of saving your important data to a safe medium and location. Backups should be done regularly, especially with more critical information and configuration files (the most important directories to backup are */etc*, */home* and */usr/local*). Traditionally, many people use *tar* with *gzip* or *bzip2* to backup directories and files. You can use these tools or programs like *dump* and *restore*, along with many other free or commercial backup solutions.

batch

is a processing mode where jobs are submitted to the CPU that are then executed sequentially until all the jobs have been processed.

beep

is the little noise your computer's speaker emits to warn you of some ambiguous situation when you're using command completion and, for example, there's more than one possible choice for completion. There might be other programs that make beeps to let you know of some particular situation.

beta testing

is the name given to the process of testing the beta version of a program. Programs usually get released in alpha and beta states for testing prior to final release.

bit

stands for *BI*nary *digi*T. A single digit which can take the values 0 or 1, because calculation is done in base two.

block mode files

files whose contents are buffered. All read/write operations for such files go through buffers, which allows for asynchronous writes on the underlying hardware, and for reads, which allows the system to avoid disk access if the data is already in a buffer.

See Also: buffer, buffer cache, character mode files.

boot

the procedure taking place when a computer is switched on, where peripherals are recognized sequentially and where the operating system is loaded into memory.

bootdisk

a bootable floppy disk containing the code necessary to load the operating system from the hard disk (sometimes it is self-sufficient).

bootloader

is a program that starts the operating system. Many bootloaders give you the opportunity to load more than one operating system by letting you choose between them at a boot menu. Bootloaders like *grub* are popular because of this feature and are very useful in dual- or multi-boot systems.

buffer

a small portion of memory with a fixed size, which can be associated with a block mode file, a system table, a process and so on. The buffer cache maintains coherency of all buffers.

See Also: buffer cache.

buffer cache

a crucial part of an operating system kernel, it is in charge of keeping all buffers up-to-date, shrinking the cache when needed, clearing unneeded buffers and more.

See Also: buffer.

bug

illogical or incoherent behavior of a program in a special case, or a behavior that does not follow the documentation or accepted standards issued for the program. Often, new features introduce new bugs in a program. Historically, this term comes from the old days of punch cards: a bug (the insect!) slipped into a hole of a punch card and, as a consequence, the program misbehaved. Admiral Grace Hopper, having discovered this, declared “It’s a bug!”, and since then the term has remained. Note that this is just one of the many stories which attempt to explain the term *bug*.

byte

eight consecutive bits, which when interpreted in base ten result in a number between 0 and 255.

See Also: bit.

case

when taken in the context of strings, the case is the difference between lowercase letters and uppercase (or capital) letters.

character mode files

files whose content is not buffered. When associated with physical devices, all input/output on these devices is performed immediately. Some special character devices are created by the operating system (`/dev/zero`, `/dev/null` and others). They correspond to data flows.

See Also: block mode files.

client

program or computer that periodically connects to another program or computer to give it orders or ask for information. In the case of **peer to peer** systems such as SLIP or PPP the client is taken to be the end that initiates the connection and the remote end receiving the call is designated as the server. It is one of the components of a **client/server system**.

client/server system

system or protocol consisting of a **server** and one or several **clients**.

command line

provided by a shell and allows the user to type commands directly. Also subject of an eternal “flame war” between its supporters and its detractors.

command mode

under *Vi* or one of its clones, it is the state of the program in which pressing a key will not insert the character in the file being edited, but instead perform an action specific to the key (unless the clone has re-mappable commands and you have customized your configuration). You may get out of it typing one of the “back to insertion mode” commands: **i**, **I**, **a**, **A**, **s**, **S**, **o**, **O**, **c**, **C**, ...

compilation

is the process of translating source code that is human readable (well, with some training) and that is written in some programming language (*C*, for example) into a binary file that is machine readable.

completion

ability of a *shell* to automatically expand a substring to a filename, user name or other item, as long as there is a match.

compression

is a way to shrink files or decrease the number of characters sent over a communications connection. Some file compression programs include *compress*, *zip*, *gzip*, and *bzip2*.

console

is the name given to what used to be called terminals. They were the machines (a screen plus a keyboard) connected to one big central mainframe. On *PC* s, the physical terminal is the keyboard and screen.

See Also: virtual console.

cookies

temporary files written on the local hard disk by a remote web server. It allows for the server to be aware of a user’s preferences when this user connects again.

datagram

A datagram is a discrete package of data and headers that contain addresses, which is the basic unit of transmission across an IP network. You might also hear this called a “packet”.

dependencies

are the stages of compilation that need to be satisfied before going on to other compilation stages in order to successfully compile a program. This term is also used where one set of programs that you wish to install are dependant on other programs that may or may not be on your system, in which case you may get a message telling you that the system needs to “satisfy dependencies” in order to continue the installation.

desktop

If you’re using the *X Window System*, the desktop is the place on the screen where you work and upon which your windows and icons are displayed. It is also called the background, and is usually filled with a simple color, a gradient color or even an image.

See Also: virtual desktops.

directory

Part of the file system structure. Files or other directories can be stored within a directory. Sometimes there are sub-directories (or branches) within a directory. This is often referred to as a directory tree. If you want to see what’s inside another directory, you will either have to list it or change to it. Files inside a directory are referred to as leaves while sub-directories are referred to as branches. Directories follow the same restrictions as files although the permissions mean different things. The special directories `.` and `..` refer to the directory itself and to the parent directory respectively.

discrete values

are values that are non-continuous. That is, there’s some kind of “spacing” between two consecutive values.

distribution

is a term used to distinguish one *GNU/Linux* manufacturers product from another. A distribution is made up of the core Linux kernel and utilities, as well as installation programs, third-party programs, and sometimes proprietary software.

DLCI

The DLCI is the Data Link Connection Identifier and is used to identify a unique virtual point to point connection via a Frame Relay network. The DLCI’s are normally assigned by the Frame Relay network provider.

echo

occurs when the characters you type in a user name entry field, for example, are shown “as is”, instead of showing “*” for each one you type.

editor

is a term typically used for programs that edit text files (aka text editor). The most well-known *GNU/Linux* editors are the GNU Emacs (*Emacs*) editor and the *UNIX* editor *Vi*.

email

stands for Electronic Mail. This is a way to send messages electronically between people on the same network. Similar to regular mail (aka snail mail), email needs a destination and sender address to be sent properly. The sender must have an address like “sender@senders.domain” and the recipient must have an address like “recipient@recipients.domain.” Email is a very fast method of communication and typically only takes a few minutes to reach anyone, regardless of where in the world they are located. In order to write email, you need an email client like *pine* *mutt* which are text-mode clients, or GUI clients like *kmail*.

environment

is the execution context of a process. It includes all the information that the operating system needs to manage the process and what the processor needs to execute the process properly.

See Also: process.

environment variables

a part of a process’ environment. Environment variables are directly viewable from the *shell*.

See Also: process.

escape

in the shell context, is the action of surrounding some string between quotes to prevent the shell from interpreting that string. For example, when you need to use spaces in some command line and pipe

the results to some other command you have to put the first command between quotes (“escape” the command) otherwise the shell will interpret it incorrectly and won’t work as expected.

filesystem

scheme used to store files on a physical media (hard drive, floppy) in a consistent manner. Examples of file systems are FAT, *GNU/Linux’ ext2fs*, ISO9660 (used by CD-ROMs) and so on. An example of a virtual filesystem is the */proc* filesystem.

firewall

a machine or a dedicated piece of hardware that in the topology of a local network is the single connection point to the outside network, and which filters, controls the activity on some ports, or makes sure only some specific interfaces may have access to the outside.

flag

is an indicator (usually a bit) that is used to signal some condition to a program. For example, a filesystem has, among others, a flag indicating if it has to be dumped in a backup, so when the flag is active the filesystem gets backed up, and when it’s inactive it doesn’t.

focus

the state for a window to receive keyboard events (such as key-presses, key-releases and mouse clicks) unless they are trapped by the window manager.

foreground

in shell context, the process in the foreground is the one that is currently running. You have to wait for such a process to finish in order to be able to type commands again.

See Also: job, background.

Frame Relay

Frame Relay is a network technology ideally suited to carrying traffic that is of bursty or sporadic nature. Network costs are reduced by having many Frame Relay customer sharing the same network capacity and relying on them wanting to make use of the network at slightly different times.

framebuffer

projection of a video card’s RAM into the machine’s address space. This allows for applications to access the video RAM without the chore of having to talk to the card. All high-end graphical workstations use frame buffers.

full-screen

This term is used to refer to applications that take up the entire visible area of your display.

gateway

link connecting two IP networks.

globbing

in the *shell*, the ability to group a certain set of filenames with a globbing pattern.

See Also: globbing pattern.

globbing pattern

a string made of normal characters and special characters. Special characters are interpreted and expanded by the *shell*.

hardware address

This is a number that uniquely identifies a host in a physical network at the media access layer. Examples of this are **Ethernet Addresses** and **AX.25 Addresses**.

hidden file

is a file which can’t be “seen” when doing a *ls* command with no options. Hidden files’ filenames begin with a *.* and are used to store the user’s personal preferences and configurations for the different programs (s)he uses. For example, *bash*’s command history is saved into *.bash_history*, a hidden file.

home directory

often abbreviated by “home”, this is the name for the personal directory of a given user.

See Also: account.

host

refers to a computer and is commonly used when talking about computers that are connected to a network.

icon

is a little drawing (normally sized 16x 16, 32x 32, 48x 48 and sometimes 64x 64 pixels) which in a graphical environment represents a document, a file or a program.

inode

entry point leading to the contents of a file on a *UNIX*-like filesystem. An inode is identified in a unique way by a number, and contains meta-information about the file it refers to, such as its access times, its type, its size, **but not its name!**

insert mode

under *Vi* or one of its clones, it is the state of the program in which pressing a key will insert that character in the file being edited (except pathological cases like the completion of an abbreviation, right justify at the end of the line, ...). One gets out of it pressing the key **Esc** (or **Ctrl-[**).

Internet

is a huge network that connects computers around the world.

IP address

is a numeric address consisting of four parts which identifies your computer on the Internet. IP addresses are structured in a hierarchical manner, with top level and national domains, domains, subdomains and each machine's personal address. An IP address would look something like 192.168.0.1. A machine's personal address can be one of two types: static or dynamic. Static IP addresses are addresses that never change, but rather are permanent. Dynamic IP addresses mean your IP address will change with each new connection to the network. Dial-up and cable modem users typically have dynamic IP addresses while some DSL and other high-speed connections provide static IP addresses.

ISO 8859

The ISO 8859 standard includes several 8-bit extensions to the ASCII character set. Especially important is ISO 8859-1, the "Latin Alphabet No. 1", which has become widely implemented and may already be seen as the *de facto* standard ASCII replacement.

ISO 8859-1 supports the following languages: Afrikaans, Basque, Catalan, Danish, Dutch, English, Faroese, Finnish, French, Galician, German, Icelandic, Irish, Italian, Norwegian, Portuguese, Scottish, Spanish, and Swedish.

Note that the ISO 8859-1 characters are also the first 256 characters of ISO 10646 (Unicode). However, it lacks the EURO symbol and does not fully cover Finnish and French. ISO 8859-15 is a modification of ISO 8859-1 that covers these needs.

See Also: ASCII.

job

in a *shell* context, a job is a process running in the background. You can have several jobs in the same shell and control these jobs independently.

See Also: foreground, background.

kernel

is the guts of the operating system. The kernel is responsible for allocating resources and separating processes from each other. It handles all of the low-level operations that allow programs to talk directly to the hardware on your computer, manages the buffer cache and so on.

kill ring

under *Emacs*, it is the set of text areas cut or copied since the starting the editor. The text areas may be recalled to be inserted again, and the structure is ring-like.

launch

is the action of invoking, or starting, a program.

library

is a collection of procedures and functions in binary form to be used by programmers in their programs (as long as the library's license allows them to do so). The program in charge of loading shared libraries at run time is called the dynamic linker.

link

reference to an inode in a directory, therefore giving a (file) name to the inode. Examples of inodes which don't have a link (and hence have no name) are: anonymous pipes (as used by the shell), sockets (aka network connections), network devices and so on.

linkage

last stage of the compile process, consisting of linking together all object files in order to produce an executable file, and matching unresolved symbols with dynamic libraries (unless a static linkage has been requested, in which case the code of these symbols will be included in the executable).

Linux

is a *UNIX*-like operating system which runs on a variety of different computers, and is free for anyone to use and modify. Linux (the kernel) was written by Linus Torvalds.

login

connection name for a user on a *UNIX* system, and the action to connect.

lookup table

is a table that stores correspondence codes (or tags) and their meaning. It is often a data file used by a program to get further information about a particular item.

For example, *HardDrake* uses such a table to know what a manufacturer's product code means. This is one line from the table, giving information about item CTL0001

```
CTL0001 sound    sb      Creative Labs  SB16 \
                        HAS_OPL3|HAS_MPU401|HAS_DMA16|HAS_JOYSTICK
```

loopback

virtual network interface of a machine to itself, allowing the running programs not to have to take into account the special case where two network entities are in fact the same machine.

major

number specific to the device class.

manual page

a small document containing the definition of a command and its usage, to be consulted with the `man` command. The first thing one should (learn how to) read when learning of a command you aren't familiar with.

minor

number identifying the specific device we are talking about.

mount point

is the directory where a partition or another device is attached to the *GNU/Linux* filesystem. For example, your CD-ROM is mounted in the `/mnt/cdrom` directory, from where you can explore the contents of any mounted CDs.

mounted

A device is mounted when it is attached to the *GNU/Linux* filesystem. When you mount a device you can browse its contents. This term is partly obsolete due to the "supermount" feature, so users do not need to manually mount removable media.

See Also: mount point.

MSS

The Maximum Segment Size (**MSS**) is the largest quantity of data that can be transmitted at one time. If you want to prevent local fragmentation MSS would equal MTU-IP header.

MTU

The Maximum Transmission Unit (**MTU**) is a parameter that determines the largest datagram than can be transmitted by an IP interface without it needing to be broken down into smaller units. The MTU should be larger than the largest datagram you wish to transmit un-fragmented. Note, this only prevents fragmentation locally, some other link in the path may have a smaller MTU and the datagram will be fragmented there. Typical values are 1500 bytes for an Ethernet interface, or 576 bytes for a PPP interface.

multitasking

the ability for an operating system to share CPU time between several processes. At a low level, this is also known as multiprogramming. Switching from one process to another requires that all the current process context be saved and restored when this process runs again. This operation is called a context switch, and on **Intel**, is done 100 times per second, thereby making it fast enough so that a user has the illusion that the operating system runs several applications at the same time. There are two types of multitasking: in preemptive multitasking the operating system is responsible for taking away the CPU and passing it to another process; cooperative multitasking is where the process itself gives back the CPU. The first variant is obviously the better choice because no program can consume the entire CPU time and block other processes. *GNU/Linux* performs preemptive multitasking. The policy to select which process should be run, depending on several parameters, is called scheduling.

multiuser

is used to describe an operating system that allows multiple users to log into and use the system at the exact same time, each being able to do their own work independent of other users. A multitasking operating system is required to provide multiuser support. *GNU/Linux* is both a multitasking and multiuser operating system, as is any *UNIX* system for that matter.

named pipe

a *UNIX* pipe which is linked, as opposed to pipes used in shells.
See Also: pipe, link.

naming

a word commonly used in computing for a method to identify objects. You will often hear of “naming conventions” for files, functions in a program and so on.

newsgroups

discussion and news areas that can be accessed by a news or USENET client to read and write messages specific to the topic of the newsgroup. For example, the newsgroup `alt.os.linux.mandrake` is an alternate newsgroup (alt) dealing with the Operating System (os) *GNU/Linux*, and specifically, **Mandrake Linux** (mandrake). Newsgroups are broken down in this fashion to make it easier to search for a particular topic.

null, character

the character or byte number 0. It is used to mark the end of a string.

object code

is the code generated by the compilation process to be linked with other object codes and libraries to form an executable file. Object code is machine readable.
See Also: compilation, linkage.

on the fly

Something is said to be done “on the fly” when it’s done along with something else, without you noticing it or explicitly asking for it.

open source

is the name given to free source code of a program that is made available to development community and public at large. The theory behind this is that allowing source code to be used and modified by a broader group of programmers will ultimately produce a more useful product for everyone. Some popular open source programs include *Apache*, *sendmail* and *GNU/Linux*.

operating system

is the interface between the applications and the underlying hardware. The tasks for any operating system are primarily to manage all of the machine specific resources. On a *GNU/Linux* system, this is done by the kernel and loadable modules. Other well-known operating systems include *AmigaOS*, *MacOS*, *FreeBSD*, *OS/2*, *UNIX*, *Windows NT*, and *Windows 9x*.

owner

in the context of users and their files, the owner of a file is the user who created that file.

owner group

in the context of groups and their files, the owner group of a file is the group to which the user who created that file belongs.

pager

program displaying a text file one screen at a time, and making it easy to move back and forth and search for strings in this file. We advise you to use `less`.

password

is a secret word or combination of words or letters that is used to secure something. Passwords are used in conjunction with user logins to multi-user operating systems, web sites, FTP sites, and so forth. Passwords should be hard-to-guess phrases or alphanumeric combinations, and should never be based on common dictionary words. Passwords ensure that other people cannot log into a computer or site with your account.

patch, to patch

file holding a list of corrections to issue to source code in order to add new features, to remove bugs, or to modify it according to one's wishes and needs. The action consisting of the application of these corrections to the archive of source code (aka "patching").

path

is an assignment for files and directories to the filesystem. The different layers of a path are separated by the "slash" or `'/'` character. There are two types of paths on *GNU/Linux* systems. The **relative** path is the position of a file or directory in relation to the current directory. The **absolute** path is the position of a file or directory in relation to the root directory.

pipe

a special *UNIX* file type. One program writes data into the pipe, and another program reads the data at the other end. *UNIX* pipes are FIFO s, so the data is read at the other end in the order it was sent. Very widely used with the shell. See also **named pipe**.

pixmap

is an acronym for "pixel map". It's another way of referring to bitmap images.

plugin

add-on program used to display or play some multimedia content found on a web document. It can usually be easily downloaded if your browser is not yet able to display or play that kind of information.

porting

one of two ways to run a program on a system it was not originally intended for. For example, to be able to run a *Windows*-native program under *GNU/Linux* (natively), it must first be ported to *GNU/Linux*.

precedence

dictates the order of evaluation of operands in an expression. For example: If you have $4 + 3 * 2$ you get 10 as the result, since the multiplication has more precedence than the addition. If you want to evaluate the addition first, then you have to add parenthesis like this: $(4 + 3) * 2$. When you do this, you'll get 14 as the result since the parenthesis have more precedence than the addition and the multiplication, so the operations in parenthesis get evaluated first.

preprocessors

are compilation directives that instruct the compiler to replace those directives for code in the programming language used in the source file. Examples of *C*'s preprocessors are `#include`, `#define`, etc.

process

in the operating system context, a process is an instance of a program being executed along with its environment.

prompt

in a *shell*, this is the string before the cursor. When you see it, you can type your commands.

protocol

Protocols organize the communication between different machines across a network, either using hardware or software. They define the format of transferred data, whether one machine controls another, etc. Many well-known protocols include HTTP, FTP, TCP, and UDP.

proxy

a machine that sits between a network and the Internet, whose role is to speed up data transfers for the most widely used protocols (for example, HTTP and FTP). It maintains a cache of previous requests, so a machine which makes a request for something which is already cached will receive it quickly, because it

will get the information from the local cache. Proxies are very useful on low bandwidth networks (such as modem connections). Sometimes the proxy is the only machine able to access outside the network.

pull-down menu

is a menu that is “rolled” with a button in some of its corners. When you press that button, the menu “unrolls” itself, showing you the full menu.

quota

is a method for restricting disk usage and limits for users. Administrators can restrict the size of home directories for a user by setting quota limits on specific file systems.

read-only mode

for a file means that the file cannot be written to. You can read its contents but you can’t modify them.
See Also: read-write mode.

read-write mode

for a file, it means that the file can be written to. You can read its contents and modify them.
See Also: read-only mode.

regular expression

a powerful theoretical tool which is used to search and match text strings. It lets one specify patterns these strings must obey. Many *UNIX* utilities use it: *sed*, *awk*, *grep*, *perl* and others.

root

is the superuser of any *UNIX* system. Typically root (aka the system administrator) is the person responsible for maintaining and supervising the *UNIX* system. This person also has complete access to everything on the system.

root directory

This is the top level directory of a filesystem. This directory has no parent directory, thus ‘..’ for root points back to itself. The root directory is written as ‘/’.

root filesystem

This is the top level filesystem. This is the filesystem where *GNU/Linux* mounts its root directory tree. It is necessary for the root filesystem to reside in a partition of its own, as it is the basis for the whole system. It holds the root directory.

route

Is the path that your datagrams take through the network to reach their destination. Is the path between one machine and another in a network.

run level

is a configuration of the system software that only allows certain selected processes to exist. Allowed processes are defined, for each runlevel, in the file */etc/inittab*. There are eight defined runlevels: 0, 1, 2, 3, 4, 5, 6, S and switching among them can only be achieved by a privileged user by means of executing the commands *init* and *telinit*.

script

shell scripts are sequences of commands to be executed as if they were sequentially entered in the console. *shell* scripts are *UNIX*’s (somewhat) equivalent of *DOS* batch files.

security levels

Mandrake Linux’s unique feature that allows you to set different levels of restrictions according to how secure you want to make your system. There are 6 predefined levels ranging from 0 to 5, where 5 is the tightest security. You can also define your own security level.

server

program or computer that provides a feature or service and awaits the connections from **clients** to execute their orders or give them the information they ask. In the case of **peer to peer** systems such as SLIP or PPP, the server is taken to be the end of the link that is called and the end calling is taken to be the client. It is one of the components of a **client/ server system**.

shadow passwords

a password management suite on *UNIX* systems in which the file containing the encrypted passwords is not world-readable, unlike what is usually found with a normal password system. It also offers other features such as password aging.

shell

The *shell* is the basic interface to the operating system kernel and provides the command line where users enter commands to run programs and system commands. All shells provide a scripting language that can be used to automate tasks or simplify often-used complex tasks. These *shell* scripts are similar to batch files from the *DOS* operating system, but are much more powerful. Some example shells are *bash*, *sh*, and *tcsh*.

single user

is used to describe a state of an operating system, or even an operating system itself, that only allows a single user to log into and use the system at any time.

site dependent

means that the information used by programs like *imake* and *make* to compile some source file depends on the site, the computer architecture, the computer's installed libraries, and so on.

socket

file type corresponding to any network connection.

soft links

see "symbolic links".

standard error

the file descriptor number 2, opened by every process, used by convention to print error messages to the terminal screen.

See Also: standard input, standard output.

standard input

the file descriptor number 0, opened by every process, used by convention as the file descriptor from which the process receives data.

See Also: standard error, standard output.

standard output

the file descriptor number 1, opened by every process, used by convention as the file descriptor in which the process prints its output.

See Also: standard error, standard input.

streamer

is a device that takes "streams" (not interrupted or divided in shorter chunks) of characters as its input. A typical streamer is a tape drive.

switch

Switches are used to change the behavior of programs, and are also called command-line options or arguments. To determine if a program has optional switches that can be used, read the *man* pages or try to pass the `--help` switch to the program (i.e., `program --help`).

symbolic links

are special files, containing nothing but a string that makes reference to another file. Any access to them is the same as accessing the file whose name is the referenced string, which may or may not exist, and the path to which can be given in a relative or an absolute way.

target

is the object of compilation, i.e. the binary file to be generated by the compiler.

telnet

creates a connection to a remote host and allows you to log into the machine, provided you have an account. Telnet is the most widely-used method of remote logins, however there are better and more secure alternatives, like *ssh*.

theme-able

a graphical application is theme-able if it is able to change its appearance in real time. Many window managers are theme-able.

traverse

for a directory on a *UNIX* system, this means that the user is allowed to go through this directory, and possibly to directories under it. This requires that the user has the execute permission on this directory.

username

is a name (or more generally a word) that identifies a user in a system. Each username is attached to a unique and single UID (user ID)

See Also: login.

variables

are strings that are used in Makefile files to be replaced by their value each time they appear. Usually they are set at the beginning of the Makefile. They are used to simplify Makefile and source files tree management.

More generally, variables in programming, are words that refer to other entities (numbers, strings, tables, etc.) that are likely to vary while the program is executing.

verbose

For commands, the verbose mode means that the command reports to standard (or possibly error) output all the actions it performs and the results of those actions. Sometimes, commands have a way to define the “verbosity level”, which means that the amount of information that the command will report can be controlled.

virtual console

is the name given to what used to be called terminals. On *GNU/Linux* systems, you have what are called virtual consoles which enable you to use one screen or monitor for many independently running sessions. By default, you have six virtual consoles that can be reached by pressing **ALT-F1** through **ALT-F6**. There is a seventh virtual console, **ALT-F7**, which will permit you to reach a running *X Window System*. In *X*, you can reach the text console by pressing **CTRL-ALT-F1** through **CTRL-ALT-F6**.

See Also: console.

virtual desktops

In the *X Window System*, the window manager may provide you several desktops. This handy feature allows you to organize your windows, avoiding the problem of having dozens of them stacked on top of each other. It works as if you had several screens. You can switch from one virtual desktop to another in a manner that depends on the window manager you’re using.

See Also: window manager, desktop.

wildcard

The ‘*’ and ‘?’ characters are used as wildcard characters and can represent anything. The ‘*’ represents any number of characters, including no characters. The ‘?’ represents exactly one character. Wildcards are often used in regular expressions.

window

In networking, the **window** is the largest amount of data that the receiving end can accept at a given point in time.

window manager

the program responsible for the “look and feel” of a graphical environment, dealing with window bars, frames, buttons, root menus, and some keyboard shortcuts. Without it, it would be hard or impossible to have virtual desktops, to resize windows on the fly, to move them around, ...

Index

- .bashrc, 14
- /dev/hda, 11
- account, 1
- applications
 - ImageMagick, 19
 - terminals, 19
- attribute
 - file, 15
- character
 - globbing, 17
- characters
 - special, 19
- collating order, 17
- command
 - cat, 7
 - cd, 5
 - init, 63
 - less, 7, 18
 - ls, 7
 - mount, 48
 - pwd, 5
 - sed, 18
 - umount, 49
 - wc, 18
- command line
 - completion, 19
- command line
 - introduction, 13
- commands
 - at, 36
 - bzip2, 38, 67
 - chgrp, 15
 - chmod, 16
 - chown, 15
 - configure, 69
 - cp, 15
 - crontab, 35
 - find, 33
 - grep, 30
 - gzip, 38
 - make, 71
 - mkdir, 13
 - mv, 14
 - patch, 80
 - rm, 13
 - rmdir, 13
 - tar, 36, 67
 - touch, 13
- console, 1
- contributors page, ii
- conventions
 - typing, ii
- directory
 - copying, 15
 - creating, 13
 - deleting, 13
 - moving, 14
 - renaming, 14

- disks, 9
- Docbook, ??
- documentation, ii
- editor
 - Emacs, 21
 - vi, 23
- environment
 - process, 59
 - variable, 6
- FHS, 43
- file
 - attribute, 15, 57
 - block mode, 53
 - block mode, 56
 - character mode, 53
 - character mode, 56
 - copying, 15
 - creating, 13
 - deleting, 13
 - link, 53, 54
 - moving, 14
 - renaming, 14
 - socket, 53
- file system
 - Devfs (Device File System), 12
- framebuffer, 86
- Free Software Foundation, ??
- GFDL, 91
- GID, 2
- globbing
 - character, 17
- GNU Free Documentation License, ??
- GNU/Linux, 1
- GPL, 87
- group, 1
 - change, 15
- grub, 85
- home
 - partition, 10
- IDE
 - devices, 11
- inode, 53
- internationalization, ii
- lilo, 83
- link
 - hard, 57
 - symbolic, 56
- Makefile, 66, 72
- Mandrake
 - Mailing Lists, i
 - Mandrake Secure, i
 - MandrakeClub, i
 - MandrakeExpert, i
 - MandrakeSoft, ??
 - MandrakeSoft S.A., ??
 - MandrakeStore, ii
- modules, 61
- owner, 15
 - change, 15
- packaging, i

- partition, 9
 - extended, 11
 - logical, 11
 - primary, 11
- password, 1
- permissions, 16
- Peter Pingus, iv
- PID, 4
- pipe
 - anonymous, 54
 - file, 53
 - named, 54
- pipes, 18
- process, 4, 20, 59
- programming, i
- prompt, 2, 5
- Queen Pingusa, iv
- RAM memory, 9
- redirection, 18
- root
 - directory, 43, 60
 - partition, 10
 - user, 2
- runlevel, 63
- SCSI
 - disks, 11
- sector, 9
- shell, 5, 13
 - globbing patterns, 17
- Soundblaster, 11
- standard
 - error, 17
 - input, 17
 - output, 17
- supermount, 50
- swap, 9
 - partition, 9
 - size, 9
- timestamps
 - atime, 13
 - ctime, 13
 - mtime, 13
- Torvalds, Linus, ??
- UID, 2
- UNIX, 1
- user, 1
- users
 - generic, iv
- usr
 - partition, 10
- utilities
 - file-handling, 13
- values
 - discrete, 17
- virus, 4